



FMSK2020C-D2G THRU FMSK20200C-D2G

Schottky Barrier Rectifier(Single Chip)

Reverse Voltage: 20 to 200 Volts


Forward Current: 20.0 Ampere

Package outline

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss, high efficiency
- High current capability, Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260°C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

TO-263

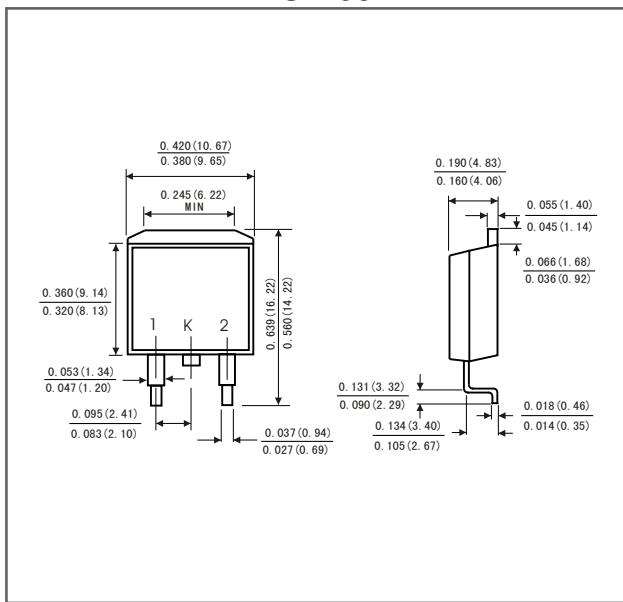

Dimensions in inches and (millimeters)

Mechanical data

- Case: JEDEC TO-263 molded plastic body
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: As marked
- Mounting Position: Any
- Weight: 0.08 ounce, 2.24 gram

Maximum Ratings And Electrical Characteristics

- Ratings at 25°C ambient temperature unless otherwise specified.
- Single phase, half wave, resistive or inductive load.
- For capacitive load, derate by 20%.

Type Number	Symbols	FMSK 2020 C-D2G	FMSK 2040 C-D2G	FMSK 2045 C-D2G	FMSK 2050 C-D2G	FMSK 2060 C-D2G	FMSK 2080 C-D2G	FMSK 20100 C-D2G	FMSK 20150 C-D2G	FMSK 20200 C-D2G	Units						
Maximum repetitive peak reverse voltage	V _{RRM}	20	40	45	50	60	80	100	150	200	Volts						
Maximum RMS voltage	V _{RMS}	14	28	31.5	35	42	56	70	105	140	Volts						
Maximum DC blocking voltage	V _{DC}	20	40	45	50	60	80	100	150	200	Volts						
Maximum average forward rectified current See Fig. 1	I _(AV)	20.0									Amps						
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	200.0									Amps						
Maximum instantaneous forward voltage at 20.0 A	V _F	0.60		0.75		0.85		0.90	0.95	Volts							
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1)	T _c =25°C T _c =125°C	I _R	0.2				50				mA						
Typical thermal resistance (Note 2)	R _{θJC}		3.0				-										
Operating junction temperature range	T _J	-65 to +150									°C						
Storage temperature range	T _{STG}	-65 to +150									°C						

Notes: 1.Pulse test: 300 μ s pulse width, 1% duty cycle

2.Thermal resistance from junction to case

Rating and characteristic curves

FIG.1-FORWARD CURRENT DERATING CURVE

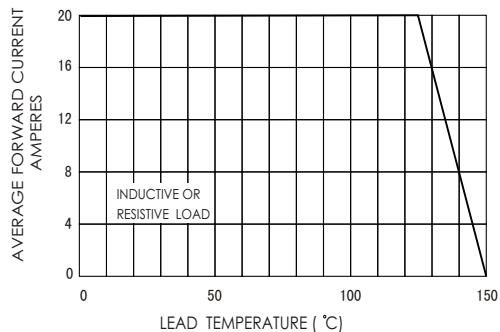


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

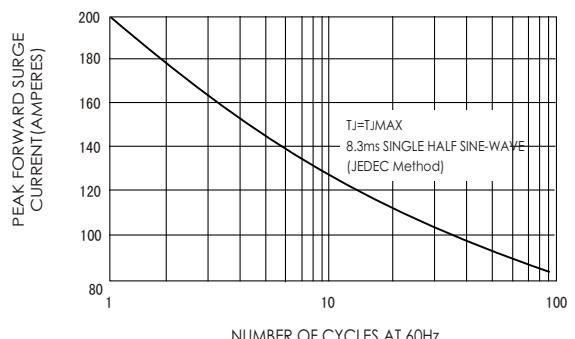


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

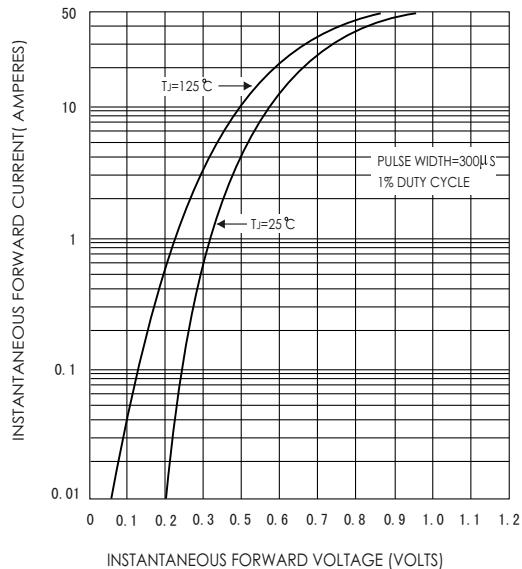


FIG.4-TYPICAL REVERSE CHARACTERISTICS

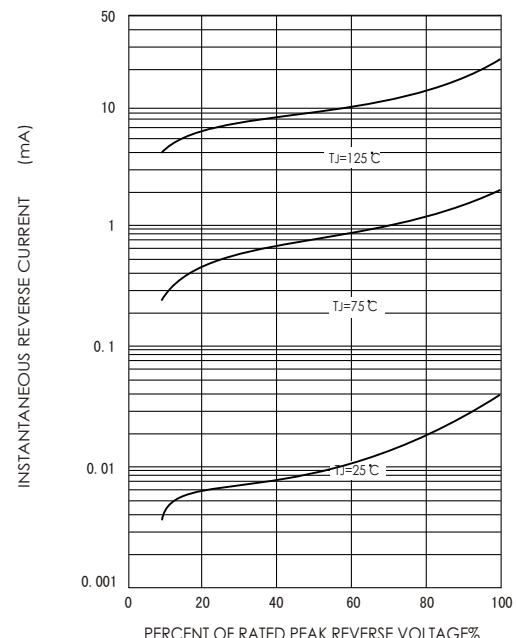


FIG.5-TYPICAL JUNCTION CAPACITANCE

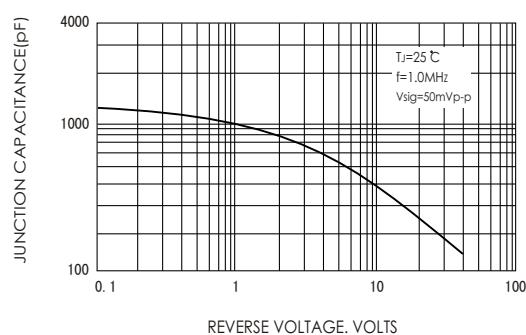


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

