


SuperPlanar™ Bridge Rectifiers

GBL4J--GBL4K

Features

- Planar passivated chips
- Ultra low leakage reverse current
- High temperature performance
- High surge current capability
- Ideal for printed circuit boards
- High temperature soldering guaranteed:260°C/10 seconds
- RoHS Compliant



Mechanical Data

- Case: GBL molded plastic
- Molding compound, UL flammability classification rating 94V-0
- Terminals: Leads solderable per MIL-STD-750,
- Mounting position: Any

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic		Symbol	GBL4J	GBL4K	Units
Peak repetitive reverse voltage		V _{RRM}	600	800	V
RMS reverse voltage		V _{RMS}	420	560	V
DC blocking voltage		V _{DC}	600	800	V
Maximum average forward output current		I _{F(AV)}	4.0		A
Peak forward surge current, 8.3ms single half-sine-wave	@T _J = 25°C	I _{FSM}	135		A
I ² t Rating for fusing	@T _J = 25°C	I ² t	76		A ² s

Thermal Characteristics

Parameter	Symbol	GBL4J	GBL4K	Units
Typical thermal resistance per leg (Note 1, Note 2)	R _{ΘJA} (2)	36		°C /W
	R _{ΘJC} (1)	4.2		
Operating junction temperature range	T _J	- 55 ---- + 150		°C
Storage temperature range	T _{STG}	- 55 ---- + 150		°C

Note:

- (1) Unit case mounted on aluminum plate heatsink
- (2) Units mounted on PCB without heatsink

SuperPlanar™ Bridge Rectifiers**GBL4J--GBL4K****Electrical Characteristics** (@T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test conditions		Typ.	Max.	Units
Maximum instantaneous forward voltage	V _F	I _F =2.0A Per Diode		0.91	0.95	V
		I _F =4.0A Per Diode		0.94	1	
Maximum Reverse current	I _R	Rated V _R , Per Diode	@T _A =25°C	0.2	1	μ A
			@T _A =150°C	30	100	

SuperPlanar™ Bridge Rectifiers

GBL4J--GBL4K

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1-Forward Current Derating Curve

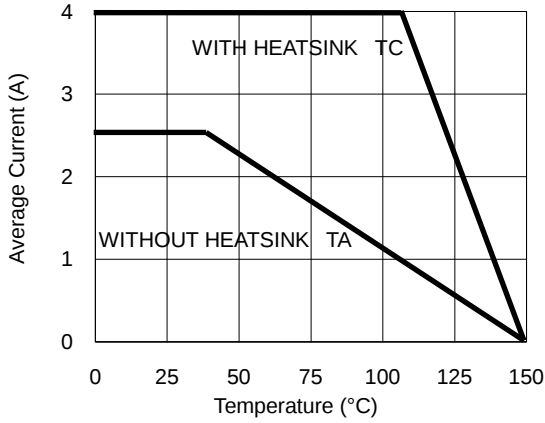


Fig.2- Surge Current Derating Curve

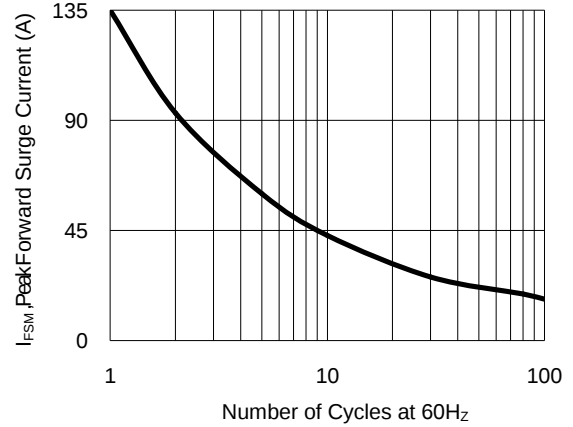


Fig.3- Typical Forward Voltage Characteristic


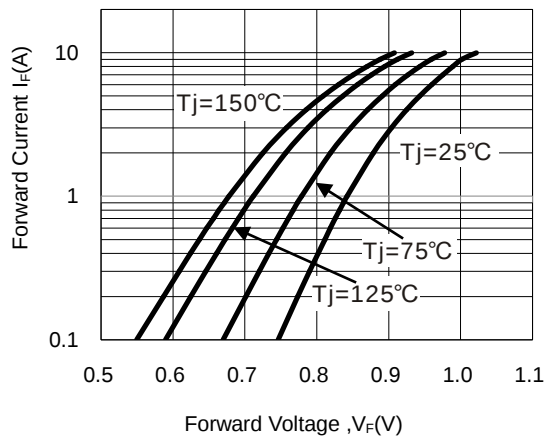



Fig.4- Typical Reverse Characteristic

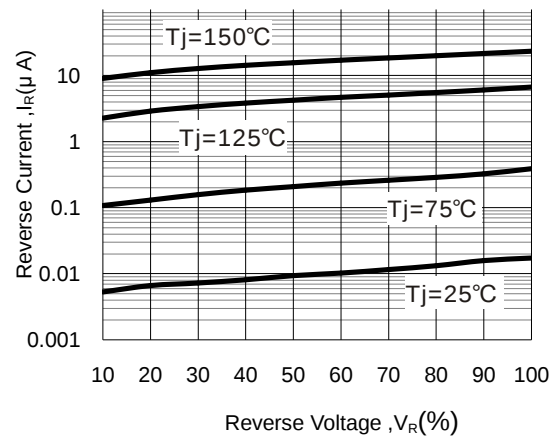

SuperPlanar™ Bridge Rectifiers

GBL4J--GBL4K

Package Outline Dimensions(unit:mm)

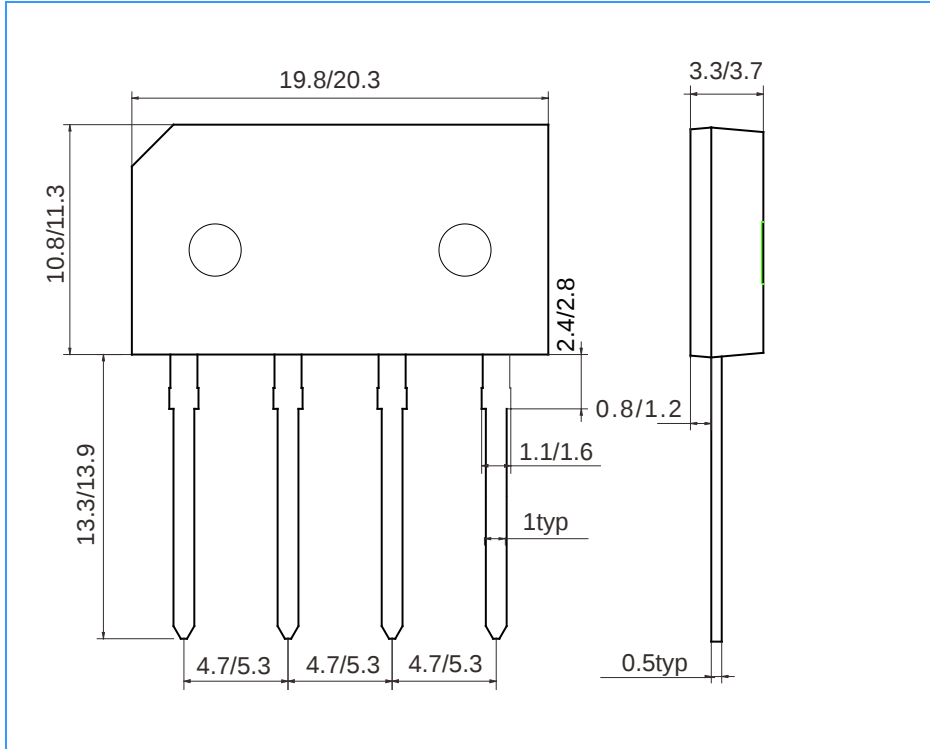

Ordering Information

Part No.	Marking	Package
GBL4J	GBL4J	GBL
GBL4K	GBL4K	GBL