



| REV. | CHANGE CONTENT | BY | DATE |
|------|----------------|----|------|
|      |                |    |      |
|      |                |    |      |
|      |                |    |      |

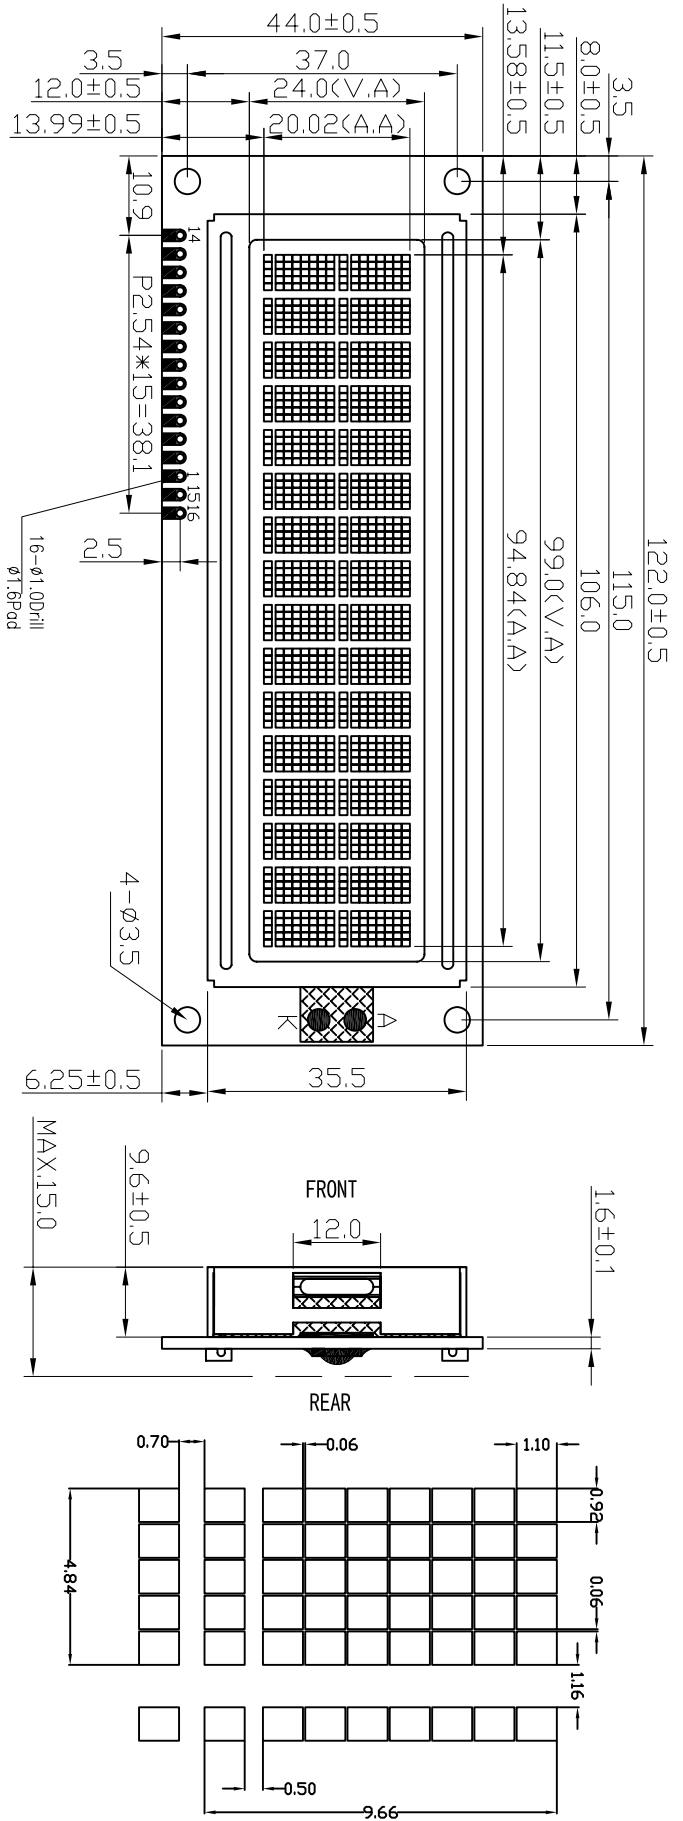

- NOTE:
1. DISPLAY TYPE: STN-GRAY-POSITIVE
  2. DISPLAY MODE: TRANSPARENT
  3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 4.8V Vop, 5V VDD
  4. VIEWING DIR.: 6:00
  5. OP. TEMP.: -20°C~70°C
  6. ST. TEMP.: -30°C~80°C
  7. BACKLIGHT: COLOR-Y/G, Vop-4.2V, MIN.80 CD/m<sup>2</sup>
  8. DRIVER IC:S6A0069,S6A0065

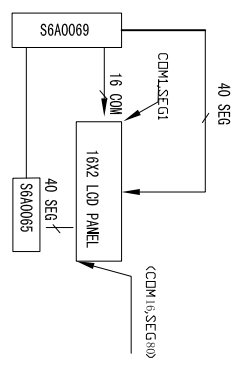

| PIN    | 1   | 2   | 3  | 4  | 5   | 6 | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15      | 16      |
|--------|-----|-----|----|----|-----|---|----|----|----|----|----|----|----|----|---------|---------|
| SYMBOL | GND | VDD | V0 | RS | R/W | E | DD | D1 | D2 | D3 | D4 | D5 | D6 | D7 | NC/LED+ | NC/LED- |

|               |                    |                 |               |                |              |
|---------------|--------------------|-----------------|---------------|----------------|--------------|
| TOLERANCE     | >0~6 ±0.10         | >6~80 ±0.20     | >80~240 ±0.30 | >240~400 ±0.50 | // 1.0 ±0.10 |
| DESIGN        | WANG RYM           | 06.12.24        | STANDARD      | TECHNOLOGY     | Q.A          |
| CHECKED       |                    |                 |               |                |              |
| APPROVED      |                    |                 |               |                |              |
| FILE NO.:     | 8                  | REV. : A        | SCALE : -     | UNIT : mm      | SHEET : 1/1  |
| DRAWING NO. : | HCI60203C-GF62L-VW | DRAWING TITLE : | LCM DRAWING   | PROJECTION :   |              |

HTD1516

HTDISPLAY CO., LTD.