




HO1080

1030.0 MHz SAW Oscillator



Dip 16-8 Case

- **SAW Frequency Stabilization**
- **Fundamental-Mode Oscillation at 1030.0 MHz**
- **Ideal for IFF Transponder Applications**

The frequency of this oscillator is stabilized by surface-acoustic-wave (SAW) technology. This results in excellent performance from a compact, rugged, oscillator operating at the fundamental frequency of 1030.0 MHz. The highly-reliable HO1080 is designed for use in identify-friend-or-foe (IFF) radar transponders in military aviation. Military Screening is available as an option. The HO1080 is a high-performance version of the HO1078 oscillator.

www.DataSheet4U.co

Absolute Maximum Ratings

Rating		Value	Units
DC Supply Voltage		0 to +13	VDC
Ambient Temperature	Powered	-55 to +105	°C
	Storage	-55 to -125	

Electrical Characteristics

Characteristic		Sym	Notes	Minimum	Typical	Maximum	Units
Operating Frequency	Absolute Frequency	f_O	1, 7	1029.800	1030.00	1030.200	MHz
	Tolerance from 1030.0 MHz	Δf_O					
RF Output Power		P_O	3, 6	+10	+12	+14	dBm
Discrete Spurious	Second Harmonics		2, 3, 4		-25	-20	dBc
	Third and Higher Harmonics			-35	-30		
	Nonharmonic			<-100	-80		
SSB Phase Noise	1 kHz Offset		2, 3, 4		-100	-90	dBc/Hz
	10 kHz Offset			-120	-110		
RF Impedance	Nominal Impedance	Z_O	3		50		Ω
	Operating Load VSWR	G_L	3, 5			1.5:1	
DC Power Supply	Operating Voltage	V_{CC}	3, 6	11.75	12.0	12.25	VDC
	Operating Current	I_{CC}			35	40	mA
Operating Ambient Temperature		T_A	3, 6	-55		+105	°C
Lid Symbolization (YY=Year, WW=Week)	RFM HO1080 YYWW						




CAUTION: Electrostatic Sensitive Device. Observe precautions for handling. COCOM CAUTION: Approval by the U.S. Department of Commerce is required prior to export of this device.


Notes:

1. One or more of the following United States patents apply: 4,616,197; 4,610,681; and 4,761,616.
2. Unless noted otherwise, all specifications are listed at $T_A = +25^\circ\text{C} \pm 2^\circ\text{C}$, $V_{CC} =$ nominal voltage ± 0.01 VDC, and load impedance = 50Ω with VSWR $\leq 1.5:1$.
3. The design, manufacturing process, and specifications of this device are subject to change without notice.
4. Applies to oscillator only and not to sidebands caused by external electrical or mechanical sources. (Dedicated external voltage regulation with low-frequency filtering for the DC power supply and proper circuit board layout are recommended for optimum spectral purity.)
5. For specified maximum operating load VSWR (any angle) at F_O . (No instability or damage will occur for any passive load impedance.)
6. For any combination of V_{CC} and T_A within the specified operating ranges.
7. Applies for any combination of Note 5 and 6 conditions.

BLOCK DIAGRAM




ELECTRICAL CONNECTIONS



DIP16-8

Metal Dual-Inline Package with 8 leads in a 16-lead DIP configuration

www.DataSheet4U.com

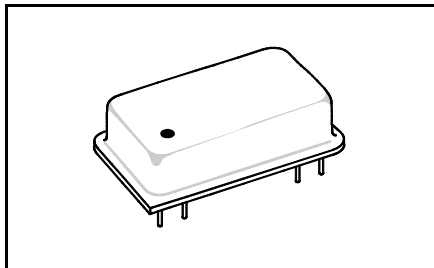

Dimension	mm		Inches	
	MIN	MAX	MIN	MAX
A	—	25.02	—	0.985
B	—	12.83	—	0.505
C	—	6.35	—	0.250
D	0.40	0.51	0.016	0.020
E	0.64 Nominal		0.025 Nominal	
F	7.62 Nominal		0.300 Nominal	
G	2.54 Nominal		0.100 Nominal	
H	17.78 Nominal		0.700 Nominal	
K	3.39	6.73	0.130	0.265
L	1.30	—	0.051	—
M	—	11.18	—	0.440
N	—	22.60	—	0.890
R	1.75	2.26	0.069	0.089

