


PRODUCT SPECIFICATION

DATE : 02/22/2011

| | | | |
|---|--|--------------|--------|
| cosmo ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT KAQW414A | NO.61M21005 | REV. 2 |
| | | SHEET 1 OF 7 | |


● OUTSIDE DIMENSION :

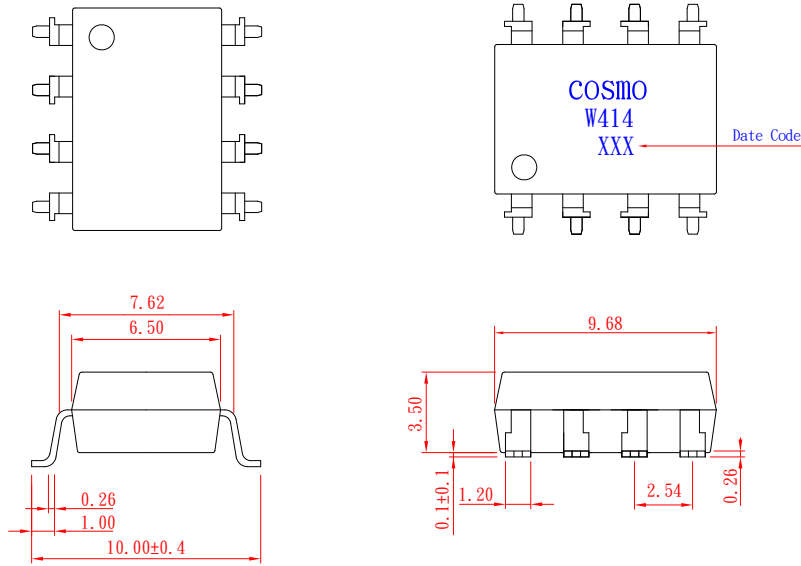

Unit : mm

Tolerance : ±0.2mm

● Operate / Reverse time

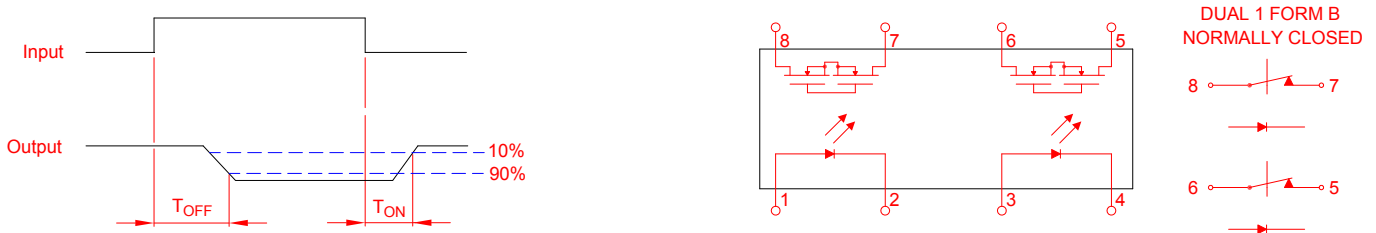

● Absolute Maximum Ratings

(Ta=25°C)

| Emitter (Input) | Detector (Output) |
|---|---|
| Reverse Voltage 5.0V | Output Breakdown Voltage ± 400V |
| Continuous Forward Current 50mA | Continuous Load Current ± 130mA |
| Peak Forward Current 1A | Power Dissipation 500mW |
| Power Dissipation 100mW | |
| Derate Linearly from 25°C 1.3mW/°C | |
| General Characteristics | |
| Isolation Test Voltage 3750VACrms | Storage Temperature Range -40°C to +125°C |
| Isolation Resistance | Operating Temperature Range ... -40°C to +85°C |
| Viso=500V, Ta=25°C ≥ 10 ¹⁰ Ω | Junction Temperature 100°C |
| Total Power Dissipation 550mW | Soldering Temperature , |
| Derate Linearly from 25°C 2.5mW/°C | 2mm from case , 10 sec 260°C |

PRODUCT SPECIFICATION

DATE : 02/22/2011

| | | | |
|---|--|--------------|------|
| cosmo ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT KAQW414A | NO.61M21005 | REV. |
| | | SHEET 2 OF 7 | 2 |

● Electro-optical Characteristics

(Ta=25°C)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit. |
|--------------------------|-------------------|--|------|------|------|---------------|
| Emitter (Input) | | | | | | |
| Forward Voltage | V_F | $I_F=10\text{mA}$ | | 1.2 | 1.5 | V |
| Operation Input Current | $I_{F\text{OFF}}$ | $V_L=\pm 20\text{V}$, $I_L \leq 5\mu\text{A}$ | | | 5 | mA |
| Recovery Input Current | $I_{F\text{ON}}$ | $V_L=\pm 20\text{V}$, $I_L=100\text{mA}$, $t=10\text{mS}$ | 0.2 | | | mA |
| Detector (Output) | | | | | | |
| Output Breakdown Voltage | V_B | $I_B=50\mu\text{A}$, $I_F=10\text{mA}$ | 400 | | | V |
| Output Off-State Leakage | $I_{T\text{OFF}}$ | $V_T=100\text{V}$, $I_F=10\text{mA}$ | | 0.2 | 2 | μA |
| I/O Capacitance | C_{ISO} | $I_F=0$, $f=1\text{MHz}$ | | 6 | | pF |
| ON Resistance | R_{ON} | $I_L=100\text{mA}$, $I_F=0\text{mA}$ | | 25 | 50 | Ω |
| Operate Time | T_{OFF} | $I_F=10\text{mA}$, $V_L=\pm 20\text{V}$ $t=10\text{ms}$, $I_L=\pm 100\text{mA}$ | | 0.6 | 1.5 | ms |
| Reverse Time | T_{ON} | | | 0.3 | 1.0 | ms |

● MOS Relay Schematic and Wiring Diagrams

| Schematic | Output configuration | Load | Connection | Wiring Diagrams |
|-----------|----------------------|-------|------------|---|
| | 2b | AC/DC | - | <p>(1) Two independent 1 Form B use</p> <p>(2) 2 Form B use</p> |

PRODUCT SPECIFICATION

DATE : 02/22/2011

cosmo
ELECTRONICS CORPORATION


SOLID STATE RELAY - MOSFET OUTPUT
KAQW414A

NO.61M21005
SHEET 3 OF 7

REV.
2


● Data Curve

Load current vs. ambient temperature
Allowable ambient Temperature :
-40°C to +85°C

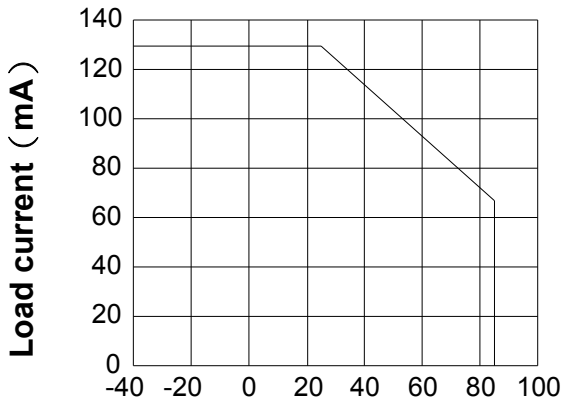


Ambient temperature Ta (°C)

On resistance vs. ambient temperature
across terminals 5 , 7 and 6 , 8 pin
LED current : 0mA
Continuous load current : 130mA (DC)

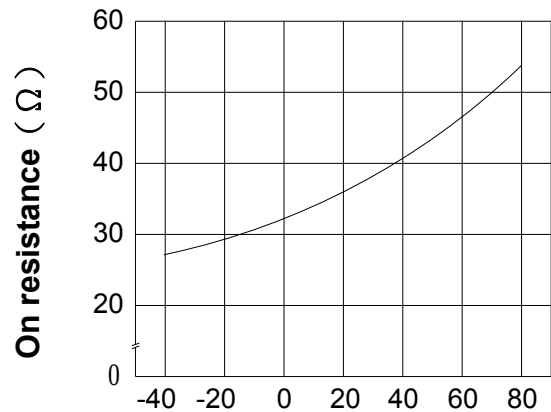


Ambient temperature Ta (°C)

Operate (OFF) time vs. ambient temperature
Load voltage 400V (DC)
LED current : 5mA
Continuous load current : 130mA (DC)

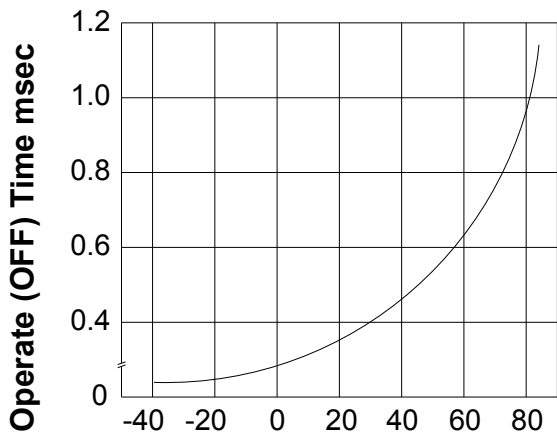

Ambient temperature Ta (°C)

Reverse (ON) time vs. ambient temperature
Load voltage 400V (DC)
LED current : 5mA
Continuous load current : 130mA (DC)

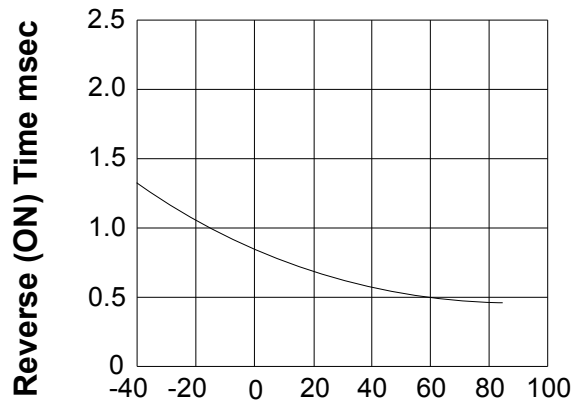

Ambient temperature Ta (°C)

PRODUCT SPECIFICATION

DATE : 02/22/2011

cosmo
ELECTRONICS CORPORATION

SOLID STATE RELAY - MOSFET OUTPUT
KAQW414A

NO.61M21005
SHEET 4 OF 7


REV.
2

LED operate (OFF) current vs.
ambient temperature

Load Voltage : 400V (DC)

Continuous load current : 130mA (DC)

LED operate (OFF) current (mA)

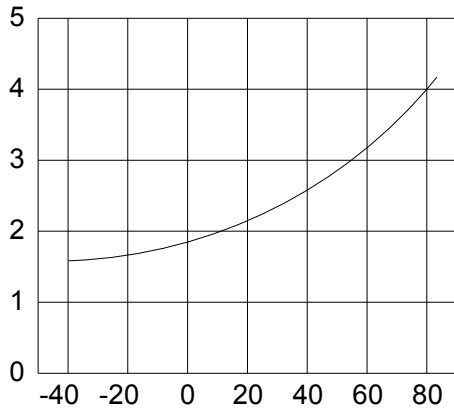


Ambient temperature Ta (°C)

LED Reverse (ON) current vs.
ambient temperature

Load Voltage : 400V (DC)

Continuous load current : 130mA (DC)

LED Reverse (ON) current (mA)

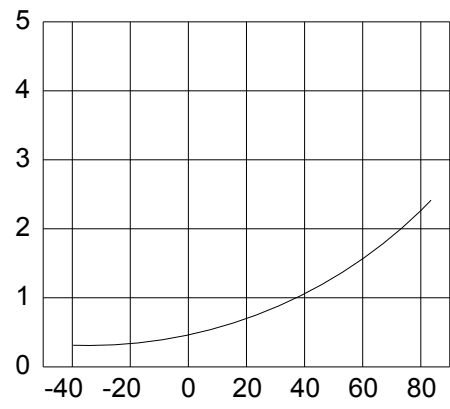


Ambient temperature Ta (°C)

LED dropout voltage vs.
ambient temperature

LED current : 5 to 50mA

LED dropout voltage (V)

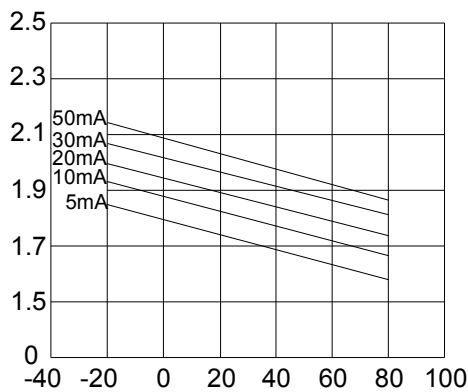


Ambient temperature Ta (°C)

Voltage vs. current characteristics of
output at MOSFET portion

Measured portion : across terminals
5 , 7 and 6 , 8 pin

Ambient temperature : 25°C

Voltage VS. Current
Characteristics

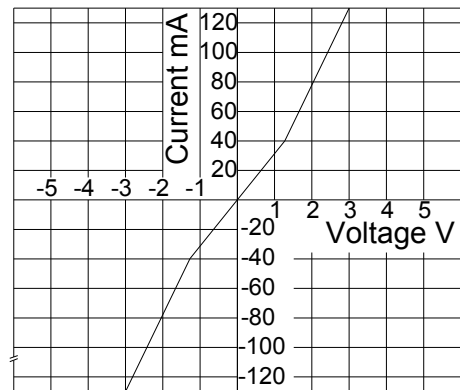


PRODUCT SPECIFICATION


DATE : 02/22/2011

| | | | |
|---|--|--------------|-----------|
| cosmo ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT KAQW414A | NO.61M21005 | REV. 2 |
| | | SHEET 5 OF 7 | |


LED forward current vs. Operate (OFF) time
 Across terminals 5 , 7 and 6 , 8 pin
 Load voltage : 400V (DC)
 Continuous load current : 130mA (DC)
 Ambient temperature : 25°C

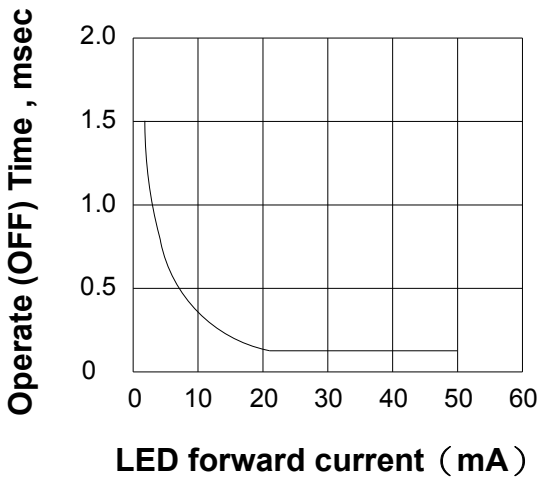


Off state leakage current
 Across terminals 5 , 7 and 6 , 8 pin
 Ambient temperature : 25°C

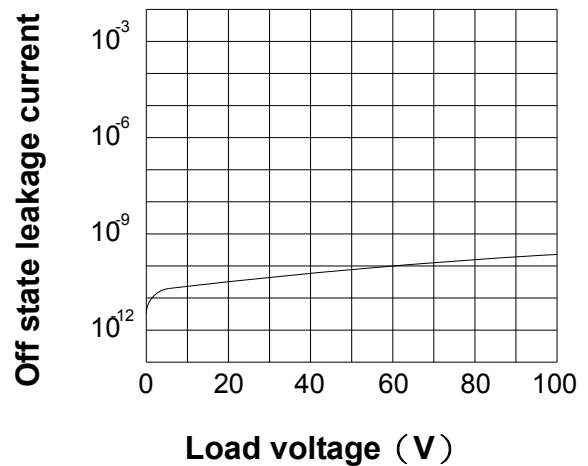

LED forward current vs. Reverse (ON) time
 Across terminals 5 , 7 and 6 , 8 pin
 Load voltage : 400V (DC)
 Continuous load current : 130mA (DC)
 Ambient temperature : 25°C

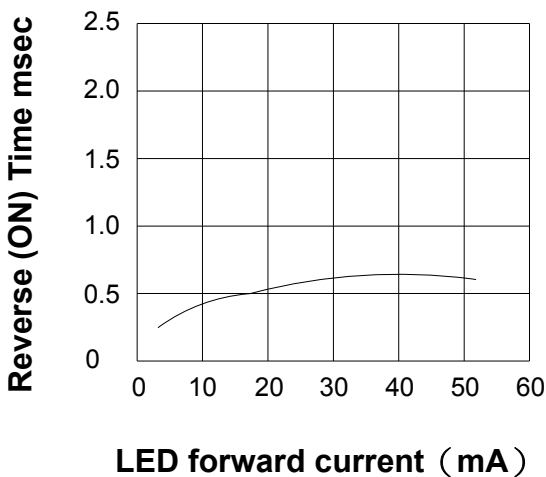

Applied voltage vs. output capacitance
 Across terminals 5 , 7 and 6 , 8 pin
 Frequency : 1MHz
 Ambient temperature : 25°C

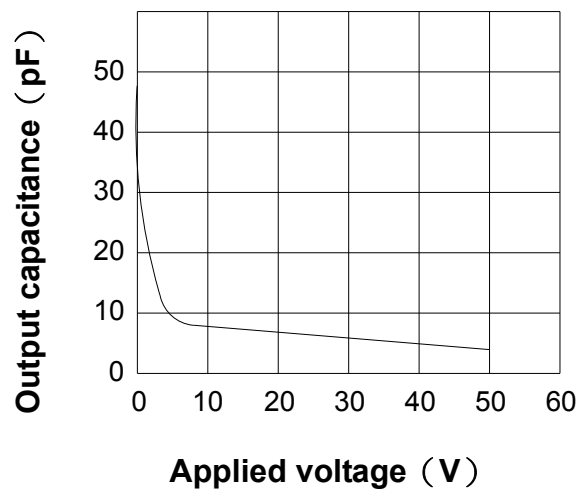

PRODUCT SPECIFICATION

DATE : 02/22/2011


| | | | |
|---|--|--------------|-----------|
| cosmo ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT KAQW414A | NO.61M21005 | REV. 2 |
| | | SHEET 6 OF 7 | |

● USING METHODS

Examples of resistance value to control LED forward current (I_F)


SSR-MOSFET OUTPUT

($I_F=5\text{mA}$)

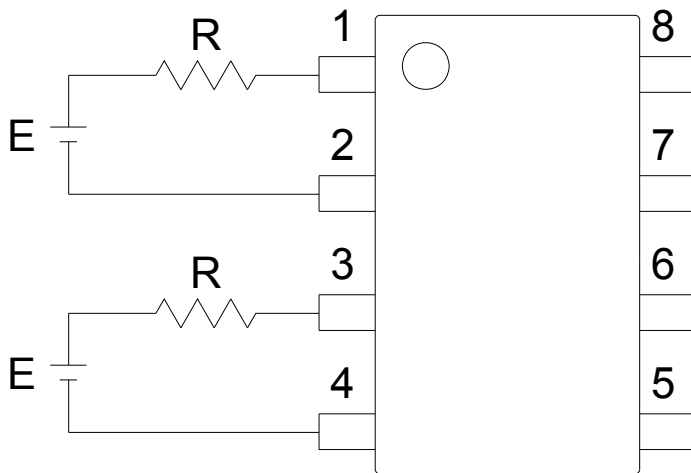

| E | R |
|------|-----------------------|
| 3.3V | Approx. 330 Ω |
| 5V | Approx. 640 Ω |
| 12V | Approx. 1.9K Ω |
| 15V | Approx. 2.5K Ω |
| 24V | Approx. 4.1K Ω |

- (1) LED forward current must be more than 5mA , at E min.
- (2) LED forward current must be less than 50mA , at E max.

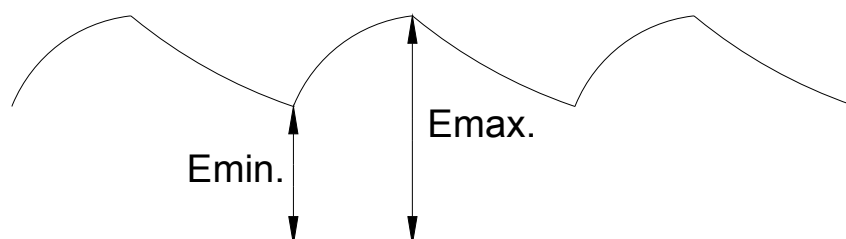

PRODUCT SPECIFICATION

DATE : 02/22/2011

cosmo
ELECTRONICS CORPORATION



SOLID STATE RELAY - MOSFET OUTPUT
KAQW414A

NO.61M21005
SHEET 7 OF 7

REV.
2

● USING METHODS

Regulate the spike voltage generated on the inductive load as follows :

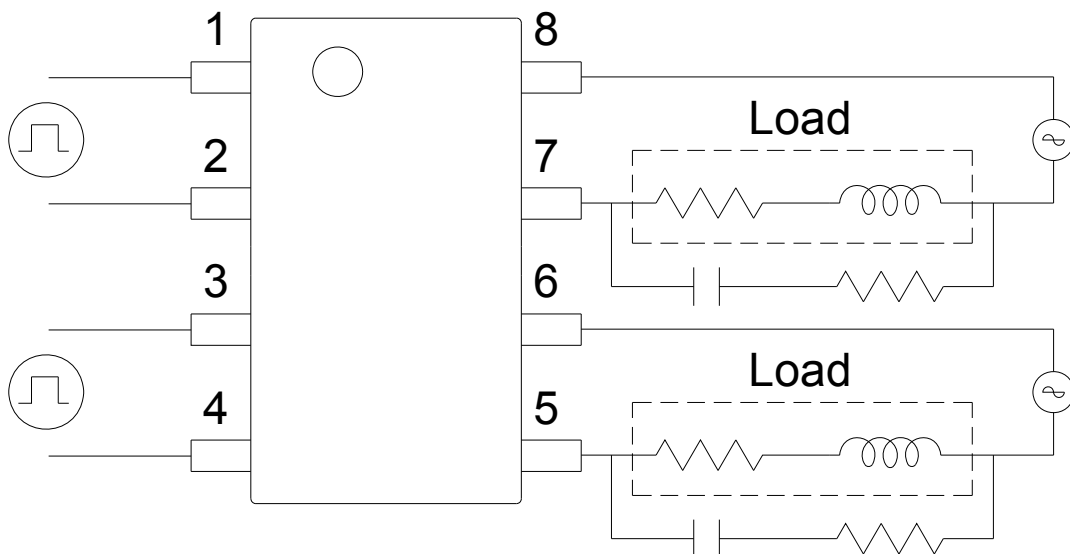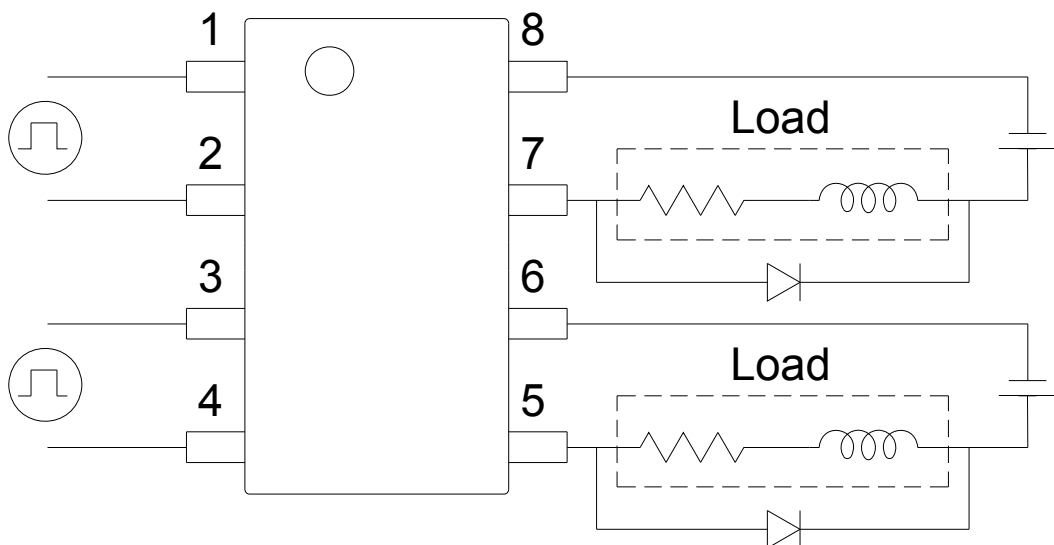

R-C Snubber