

General Description

This planar stripe MOSFET has better characteristics, such as fast switching time, low on resistance, low gate charge and excellent avalanche characteristics. It is mainly suitable for electronic ballast and switching mode power supplies.

FEATURES




- $V_{DSS(Min.)} = 600V$, $I_D = 6A$
- $R_{DS(ON)} = 1.4$ (Max) @ $V_{GS} = 10V$
- $Q_g(\text{typ.}) = 16nC$

MAXIMUM RATING (Tc=25)

CHARACTERISTIC	SYMBOL	RATING		UNIT
		KF6N60P	KF6N60F	
Drain-Source Voltage	V_{DSS}	600		V
Gate-Source Voltage	V_{GSS}	± 30		V
Drain Current	@Tc=25	6	6*	A
	@Tc=100	3.8	3.8*	
	Pulsed (Note1)	I_{DP}	15	
Single Pulsed Avalanche Energy (Note 2)	E_{AS}	180		mJ
Repetitive Avalanche Energy (Note 1)	E_{AR}			mJ
Peak Diode Recovery dv/dt (Note 3)	dv/dt	4		V/ns
Drain Power Dissipation	Tc=25	100	41.7	W
	Derate above 25	0.8	0.33	W/
Maximum Junction Temperature	T_j	150		
Storage Temperature Range	T_{stg}	-55 150		
Thermal Characteristics				
Thermal Resistance, Junction-to-Case	R_{thJC}	1.25	3.0	/W
Thermal Resistance, Junction-to-Ambient	R_{thJA}	62.5	62.5	/W

* : Drain current limited by maximum junction temperature.

PIN CONNECTION

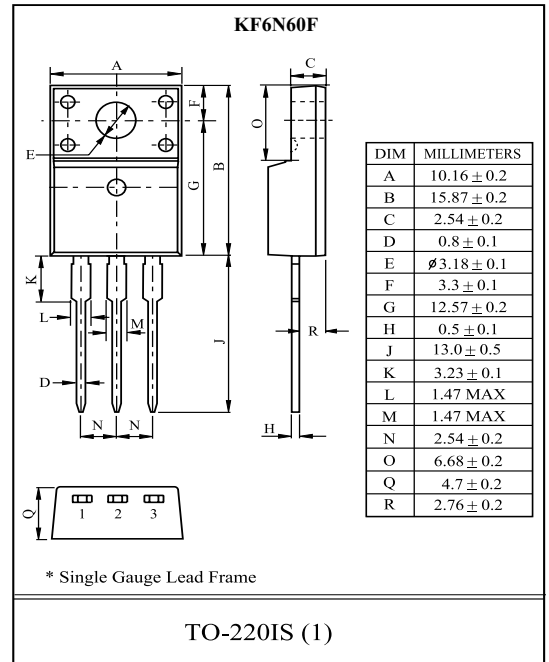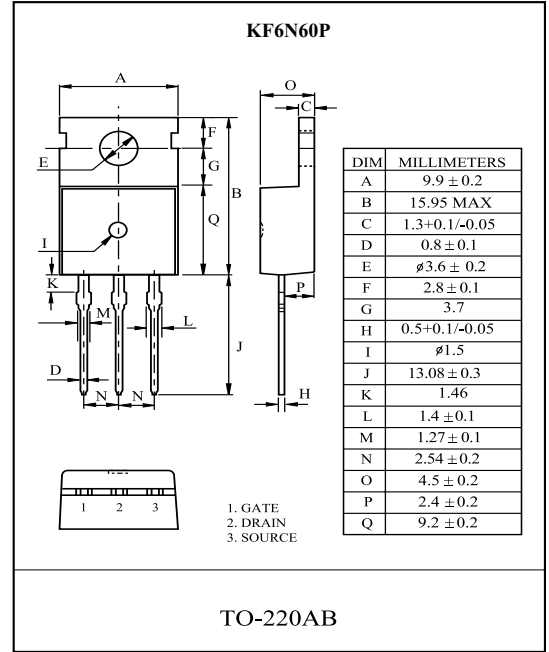

KF6N60P/F

ELECTRICAL CHARACTERISTICS (Tc=25)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=250\mu A, V_{GS}=0V$	600	-	-	V
Breakdown Voltage Temperature Coefficient	BV_{DSS}/T_j	$I_D=250\mu A$, Referenced to 25	-	0.6	-	V/
Drain Cut-off Current	I_{DSS}	$V_{DS}=600V, V_{GS}=0V$,	-	-	10	μA
Gate Threshold Voltage	V_{th}	$V_{DS}=V_{GS}, I_D=250\mu A$	2.5	-	4.5	V
Gate Leakage Current	I_{GSS}	$V_{GS}=\pm 30V, V_{DS}=0V$	-	-	± 100	nA
Drain-Source ON Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=3.0A$	-	1.2	1.4	
Dynamic						
Total Gate Charge	Q_g	$V_{DS}=480V, I_D=6A$ $V_{GS}=10V$ (Note4,5)	-	16	-	nC
Gate-Source Charge	Q_{gs}		-	3.1	-	
Gate-Drain Charge	Q_{gd}		-	6.0	-	
Turn-on Delay time	$t_{d(on)}$	$V_{DD}=300V, I_D=6A$ $R_G=25$ (Note4,5) $V_{GS}=10V$	-	20	-	ns
Turn-on Rise time	t_r		-	20	-	
Turn-off Delay time	$t_{d(off)}$		-	50	-	
Turn-off Fall time	t_f		-	20	-	
Input Capacitance	C_{iss}	$V_{GS}=25V, V_{DS}=0V, f=1.0MHz$	-	710	-	pF
Output Capacitance	C_{oss}		-	80	-	
Reverse Transfer Capacitance	C_{rss}		-	8.0	-	
Source-Drain Diode Ratings						
Continuous Source Current	I_S	$V_{GS}<V_{th}$	-	-	6	A
Pulsed Source Current	I_{SP}		-	-	24	
Diode Forward Voltage	V_{SD}	$I_S=6A, V_{GS}=0V$	-	-	1.4	V
Reverse Recovery Time	t_{rr}	$I_S=6A, V_{GS}=0V$,	-	390	-	ns
Reverse Recovery Charge	Q_{rr}	$dI_S/dt=100A/\mu s$	-	2.2	-	μC

Note 1) Repetivity rating : Pulse width limited by junction temperature.


Note 2) $L = 9.5mH, I_S=6A, V_{DD}=50V, R_G = 25$, Starting $T_j = 25$.

Note 3) $I_S = 6A, dI/dt = 100A/\mu s, V_{DD} = BV_{DSS}$, Starting $T_j = 25$.

Note 4) Pulse Test : Pulse width $300\mu s$, Duty Cycle 2% .

Note 5) Essentially independent of operating temperature.

Marking

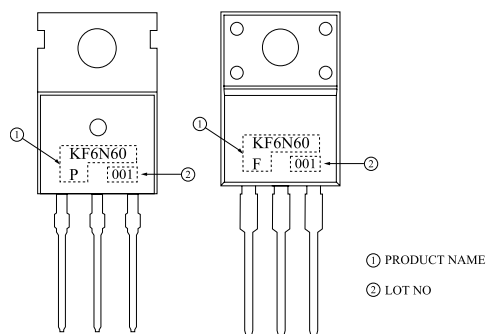

KF6N60P/F

Fig1. $I_D - V_{DS}$

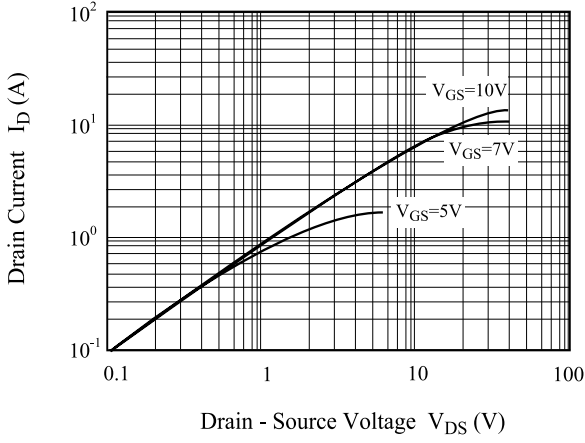


Fig2. $I_D - V_{GS}$

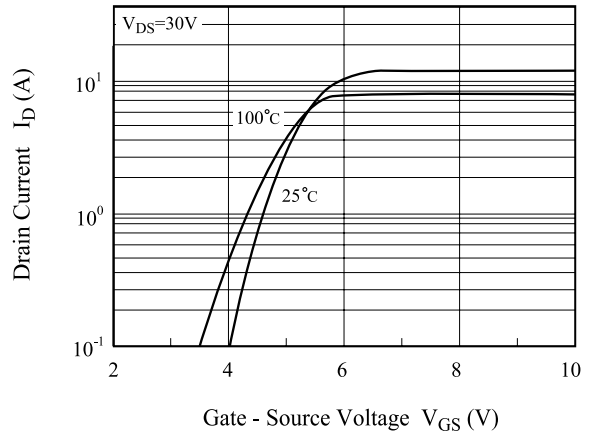


Fig3. $BV_{DSS} - T_j$

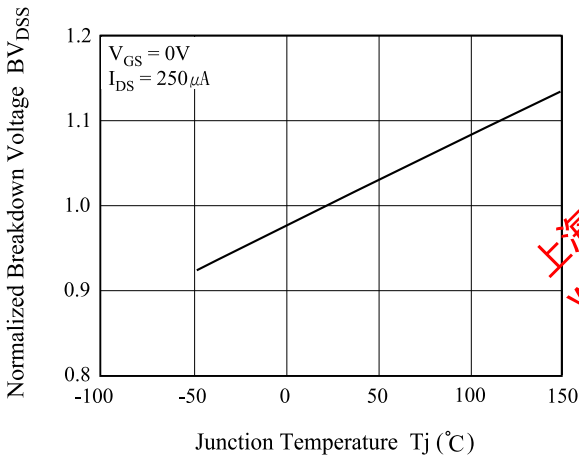


Fig4. $R_{DS(ON)} - I_D$

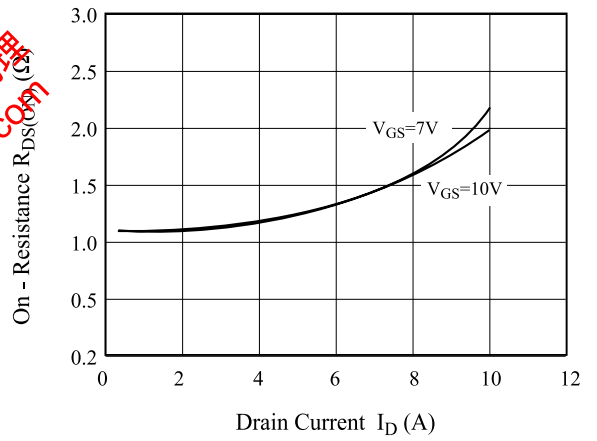


Fig5. $I_S - V_{SD}$


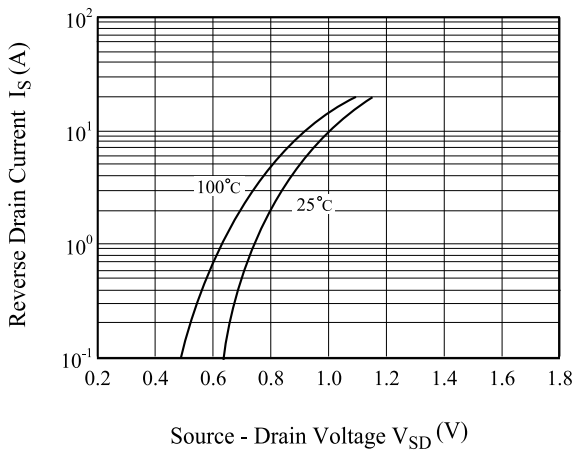


Fig6. $R_{DS(ON)} - T_j$

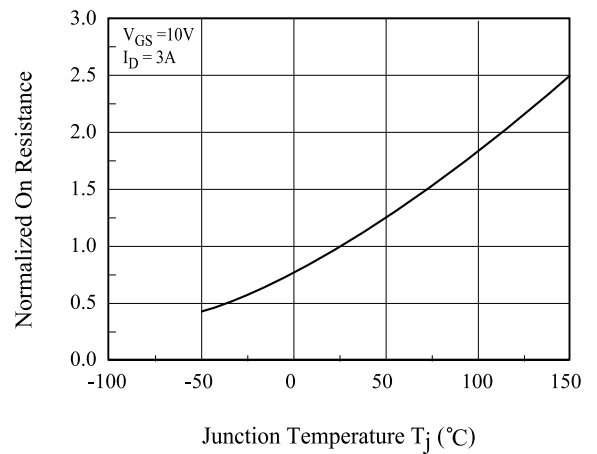

上海众群授权代理
www.ckb-sh.com

KF6N60P/F

Fig 7. C - V_{DS}

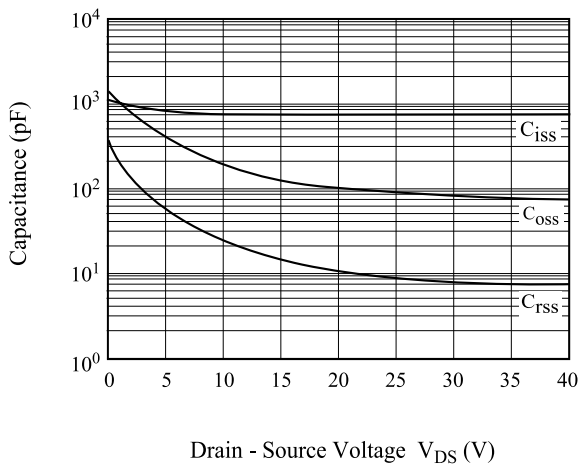


Fig8. Q_g- V_{GS}

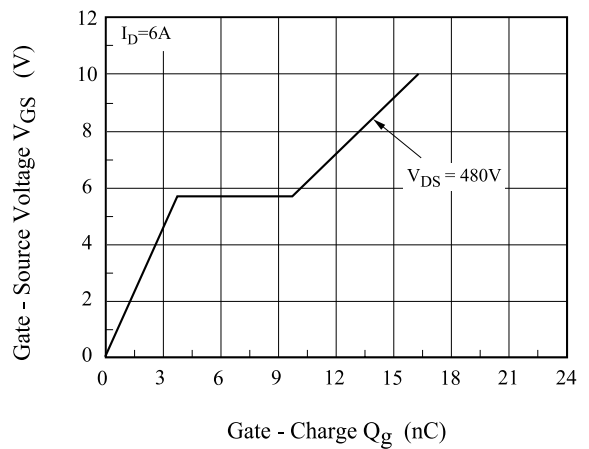


Fig9. Safe Operation Area

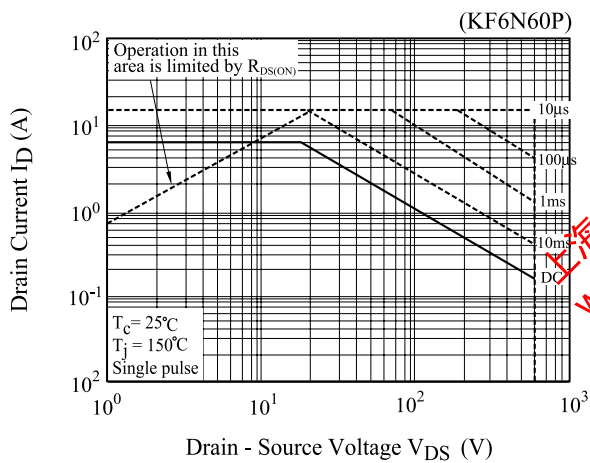


Fig10. Safe Operation Area


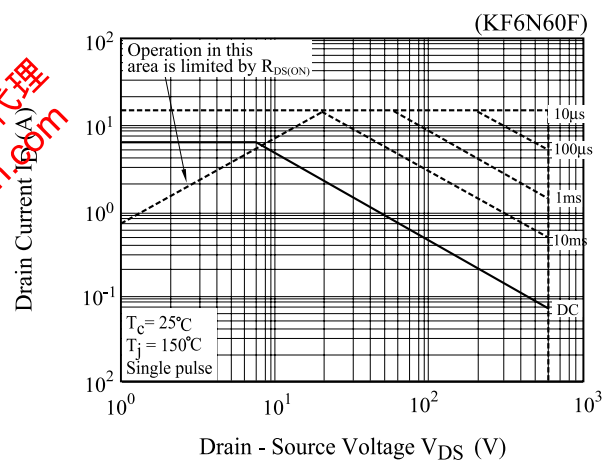


Fig11. ID - T_j

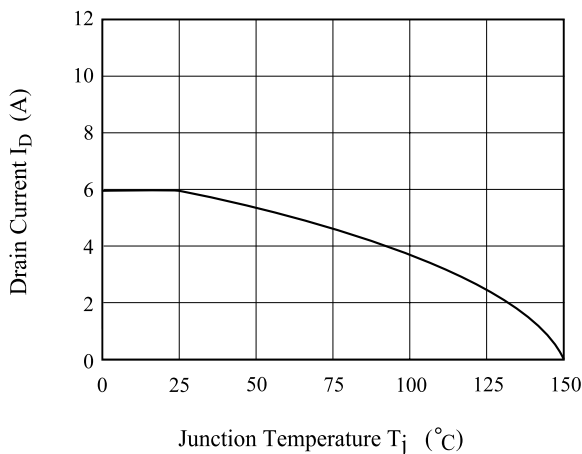

上海众群授权代理
 www.ckb-sh.com

KF6N60P/F

Fig12. Transient Thermal Response Curve

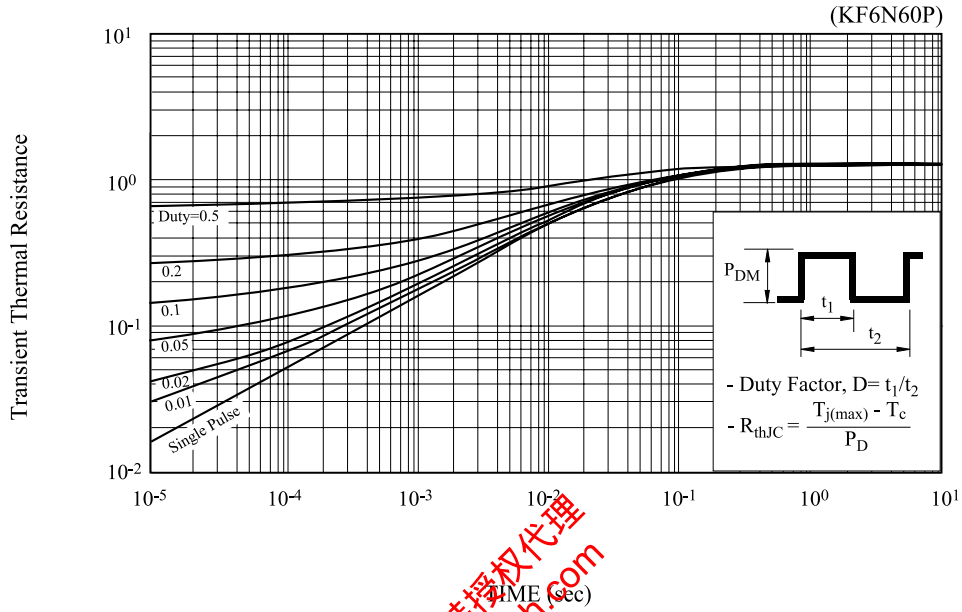


Fig13. Transient Thermal Response Curve

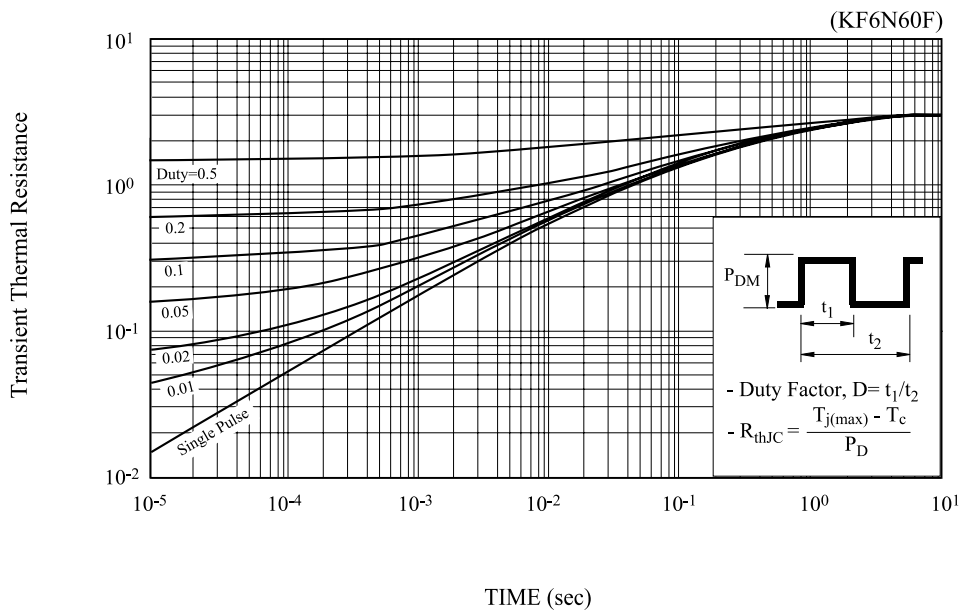


Fig14. Gate Charge

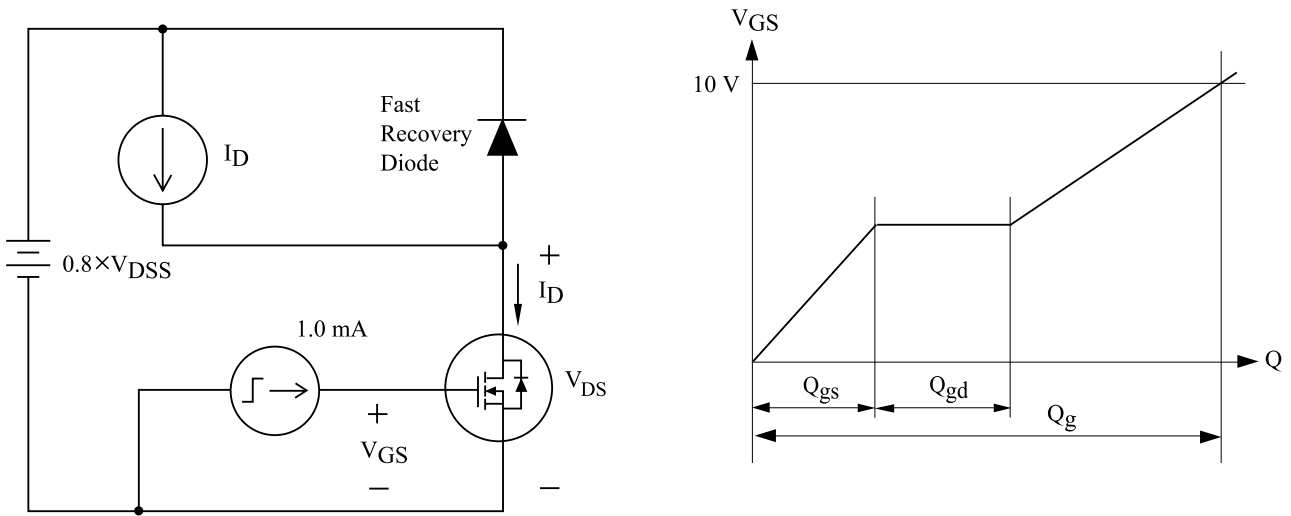


Fig15. Single Pulsed Avalanche Energy



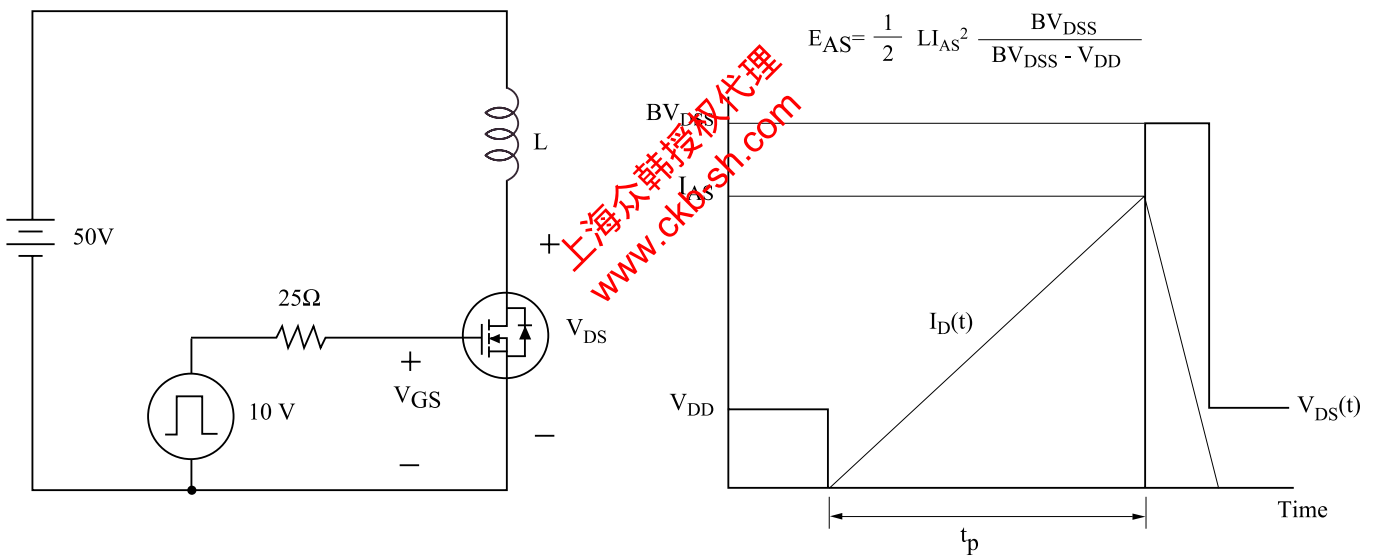


Fig16. Resistive Load Switching

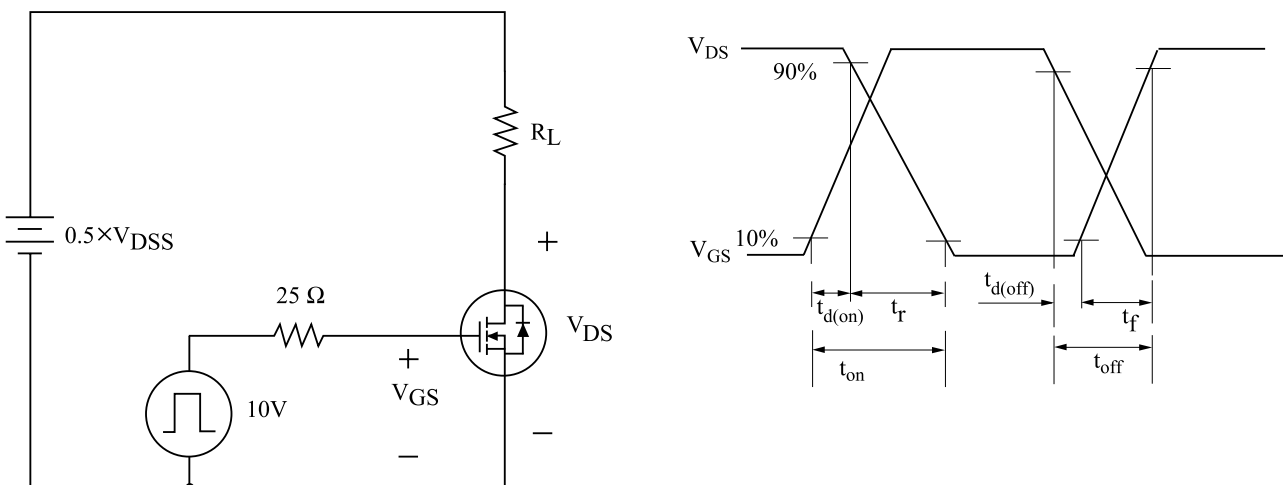

KF6N60P/F

Fig17. Source - Drain Diode Reverse Recovery and dv/dt

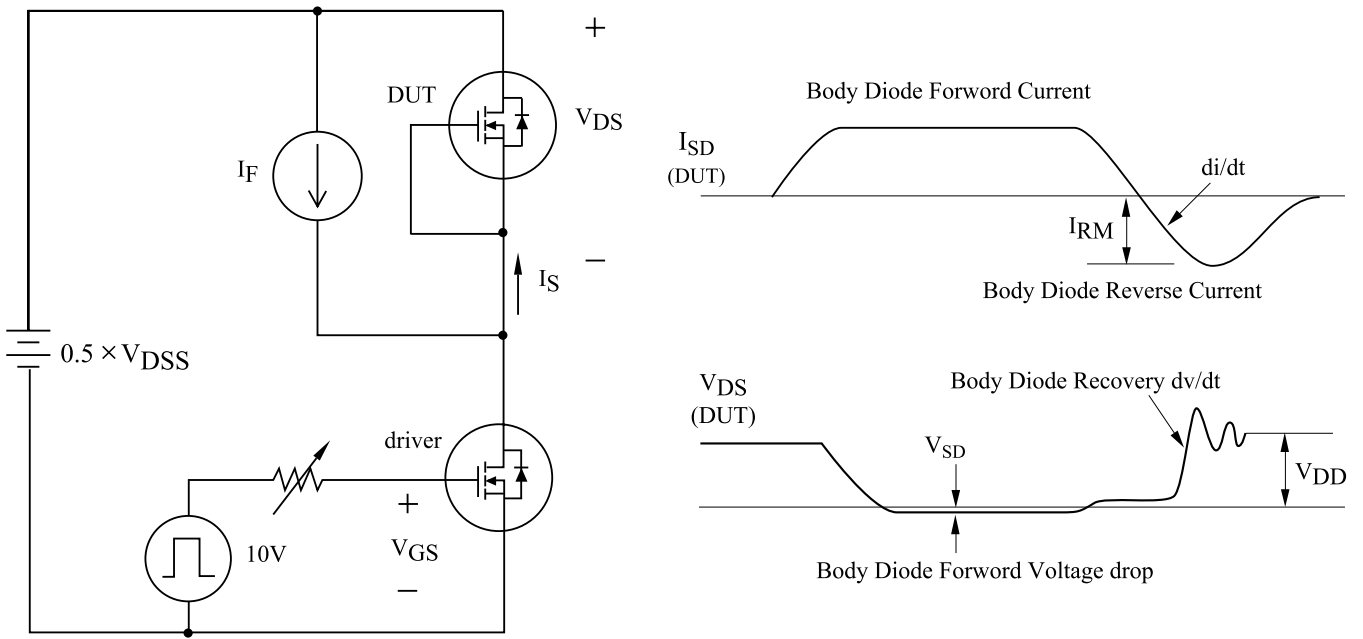

上海众翰授权代理
www.ckb-sh.com