

2-Phase Hybrid Stepping Motor

1.8°


KH39 series

HIGH TORQUE, LOW VIBRATION AND LOW NOISE

STANDARD SPECIFICATIONS

MODEL	UNIT	KH39GM2	
		-801	-851
DRIVE METHOD	————	UNI-POLAR	BI-POLAR
NUMBER OF PHASES	————	2	2
STEP ANGLE	deg./step	1.8	1.8
VOLTAGE	V	6.4	4.6
CURRENT	A/PHASE	0.47	0.65
RESISTANCE	Ω/PHASE	13.6	7.0
INDUCTANCE	mH/PHASE	9.8	9.8
HOLDING TORQUE	mN·m	127	157
	oz · in	18	22
DETENT TORQUE	mN·m	11.8	11.8
	oz · in	1.7	1.7
ROTOR INERTIA	g · cm ²	27	27
	oz · in ²	0.15	0.15
WEIGHT	g	240	240
	lb	0.53	0.53
INSULATION CLASS	————	E EQUIVALENT (120°C 248° F) (UL VALUE : CLASS B-130°C)	
INSULATION RESISTANCE	————	500VDC 100MΩmin.	
DIELECTRIC STRENGTH	————	500VAC 50HZ 1min.	
OPERATING TEMP.RANGE	℃	0 to 50	
ALLOWABLE TEMP.RISE	K	70	

DIMENSIONS unit = mm (inch)


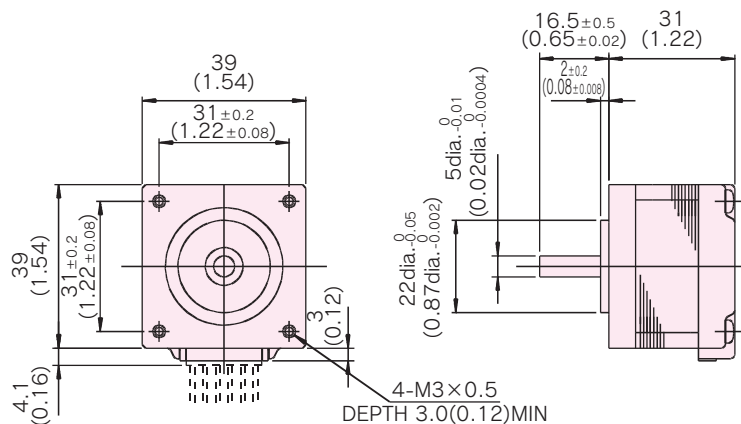





Features

1. High torque
Output is 1.3 times as high as conventional products.
2. Low noise -7dB(A) quieter than conventional products.

■ TORQUE CHARACTERISTICS vs. PULSE RATE

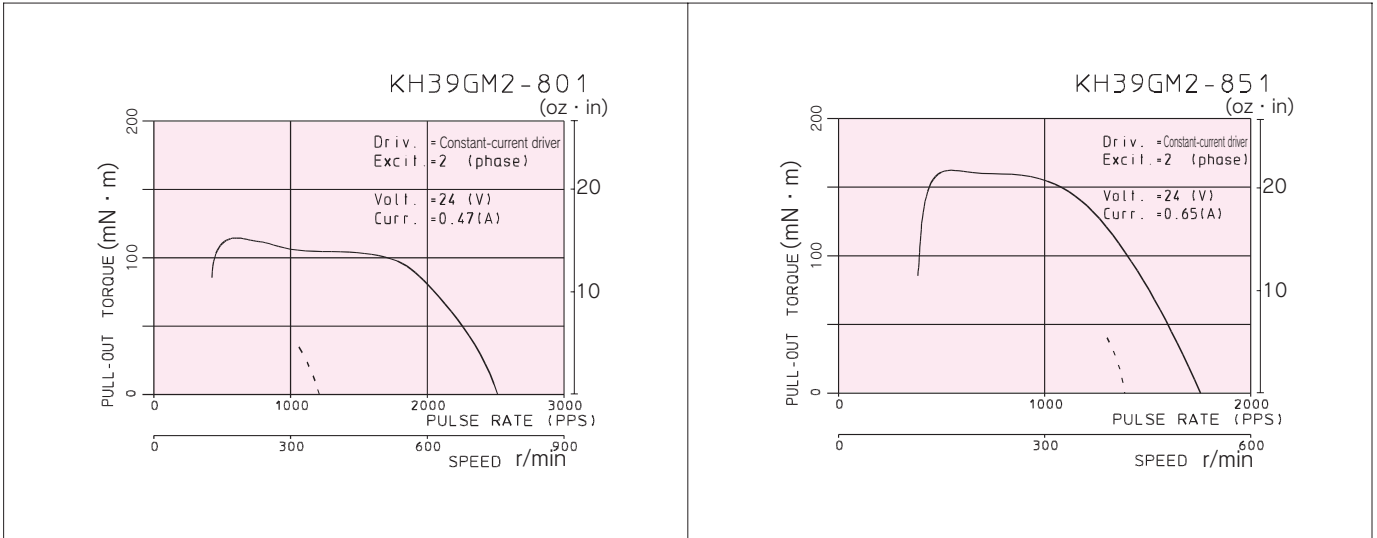

■ CONNECTION DIAGRAMS

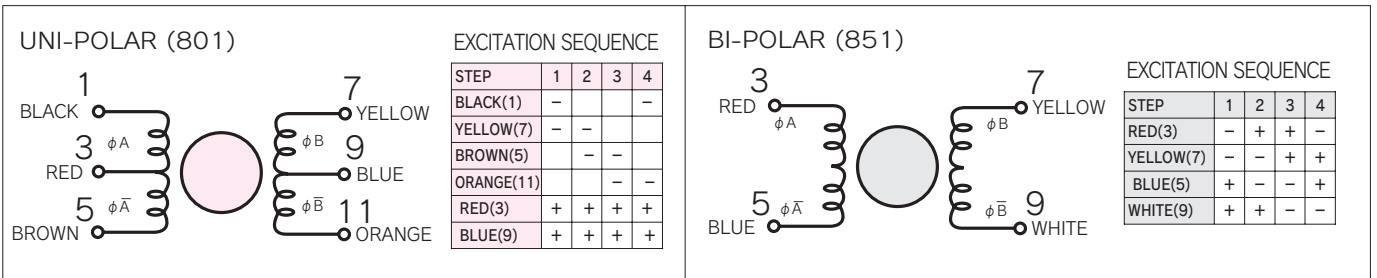

■ CONNECTION CABLE TO MOTOR unit = mm (inch)

