
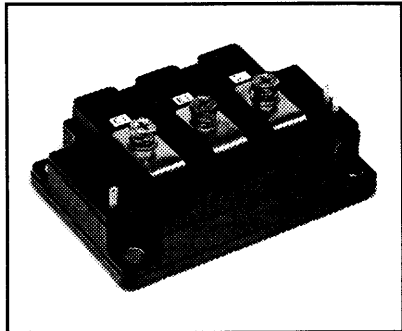


KS324520

Single Darlington Transistor Module 200 Amperes/600 Volts

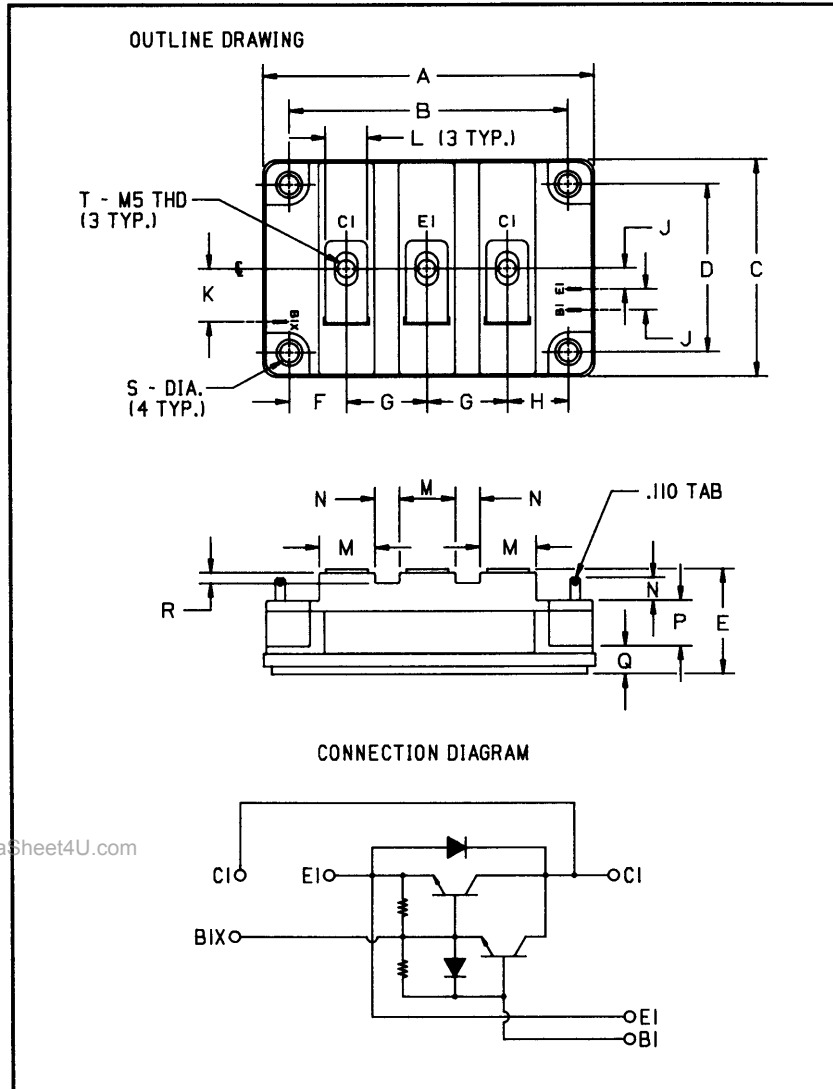

Description:

The Powerex Single Darlington Transistor Modules are high power devices designed for use in switching applications. The modules are isolated, consisting of one Darlington Transistor with a reverse parallel connected high-speed diode and base-to-emitter speed-up diode.

Features:

- Isolated Mounting
- Planar Chips
- Discrete Fast Recovery Feedback Diode
- High Gain (h_{FE})
- TAB Quick-Connect Terminals
- Base-Emitter Speed-up Diode

Applications:

- Inverters
- DC Motor Control
- Switching Power Supplies
- AC Motor Control

Ordering Information:

Example: Select the complete eight digit module part number you desire from the table - i.e. KS324520 is a 450 $V_{CE0(sus)}$ (600 V_{CEV}), 200 Ampere Single Darlington Module.

Outline Drawing

Dimensions	Inches	Millimeters
A	3.740 Max.	95 Max.
B	3.150 ± 0.010	80 ± 0.25
C	2.441 Max.	62 Max.
D	1.890 ± 0.010	48 ± 0.25
E	1.181 Max.	30 Max.
F	0.650	16.5
G	0.906	23
H	0.689	17.5
J	0.236	6

Dimensions	Inches	Millimeters
K	0.596	15
L	0.472	12
M	0.630	16
N	0.276	7
P	0.512	13
Q	0.315	8
R	0.118	3
S	0.216 Dia.	5.5 Dia.
T	M5 Metric	M5

Type	$V_{CE0(sus)}$ Volts (X 10)	Current Rating Amperes (X 10)
KS32	45	20

KS324520
Single Darlington Transistor Module
 200 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

Ratings	Symbol	KS324520	Units
Junction Temperature	T_j	-40 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Collector-Emitter Sustaining Voltage	$V_{CE(sus)}$	450	Volts
Collector-Emitter Sustaining Voltage, $V_{BE} = -2\text{V}$	$V_{CEV(sus)}$	600	Volts
Collector-Base Voltage	V_{CBO}	600	Volts
Emitter-Base Voltage	V_{EBO}	7	Volts
Collector-Emitter Voltage	V_{CEV}	600	Volts
Continuous Collector Current	I_C	200	Amperes
Diode Forward Current	I_{FM}	200	Amperes
Continuous Base Current	I_B	12	Amperes
Diode Surge Current	I_{FSM}	2000	Amperes
Power Dissipation	P_t	1250	Watts
Max. Mounting Torque M5 Terminal Screws	-	17	in.-lb.
Max. Mounting Torque M5 Mounting Screws	-	17	in.-lb.
Module Weight (Typical)	-	420	Grams
V Isolation	V_{RMS}	2500	Volts

Electrical Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified










Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units	
Collector Cutoff Current	I_{CEV}	$V_{CE} = 600\text{V}, V_{BE} = -2\text{V}$	-	-	4	mA	
		$V_{CE} = 600\text{V}, V_{BE} = -2\text{V}, T_C = 125^\circ\text{C}$	-	-	30	mA	
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 7\text{V}$	-	-	800	mA	
DC Current Gain	h_{FE}	$I_C = 200\text{A}, V_{CE} = 2\text{V}$	75	-	-	-	
		$I_C = 200\text{A}, V_{CE} = 5\text{V}$	100	-	-	-	
Diode Forward Voltage	V_{FM}	$I_{FM} = 200\text{A}$	-	-	1.75	Volts	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 200\text{A}, I_B = 2.6\text{A}$	-	-	2.0	Volts	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 200\text{A}, I_B = 2.6\text{A}$	-	-	2.5	Volts	
Resistive	Turn-on	t_{on}	$V_{CC} = 300\text{V}$	-	-	2.0	μs
	Storage Time			t_s	$I_C = 200\text{A}$	-	-
Switch Times	Fall Time	t_f	$I_{B1} = 4\text{A}, I_{B2} = -4\text{A}$	-	-	3.0	μs

Thermal and Mechanical Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Case-to-Sink	$R_{\theta(c-s)}$	-	-	-	0.05	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	$R_{\theta(j-c)}$	Transistor Part	-	-	0.1	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	$R_{\theta(j-c)}$	Diode Part	-	-	0.38	$^\circ\text{C/W}$

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

KS324520
Single Darlington Transistor Module
 200 Amperes/600 Volts

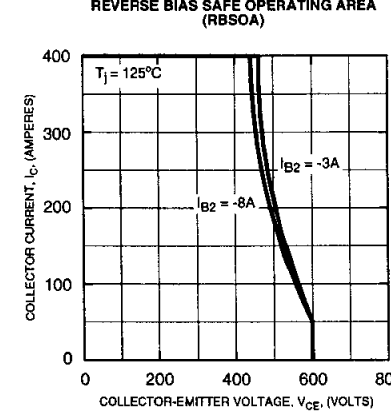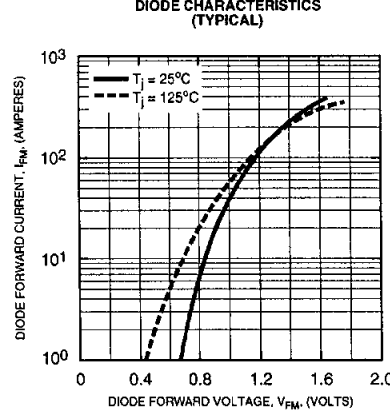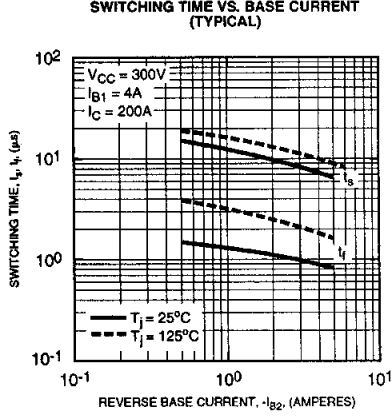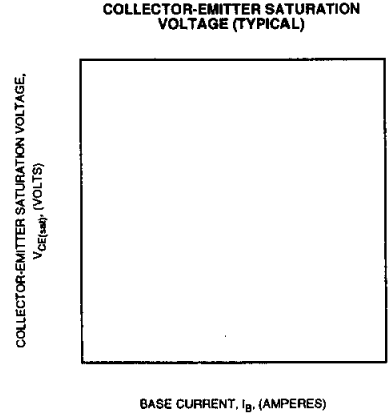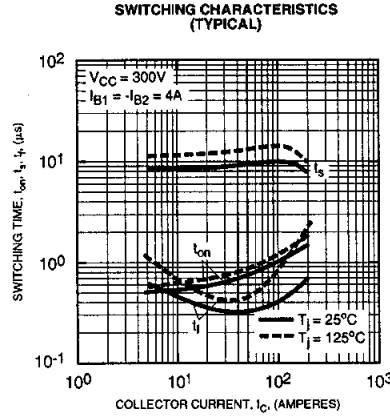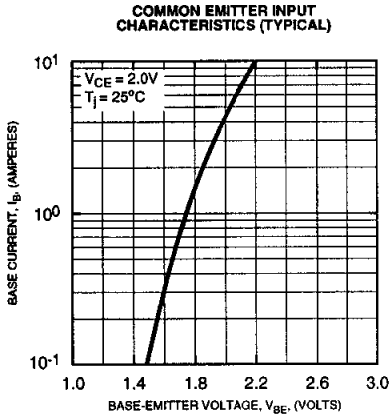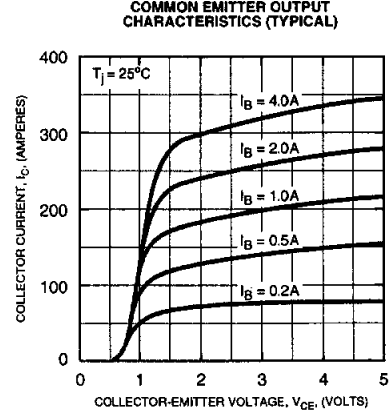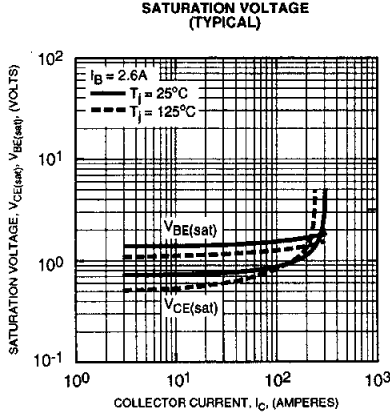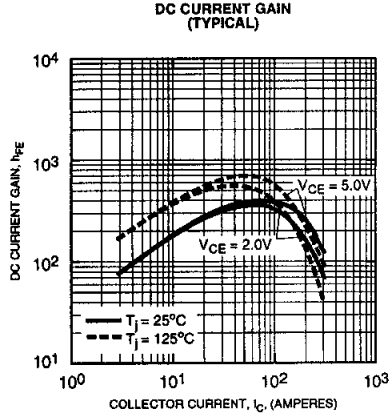

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

KS324520
Single Darlington Transistor Module
 200 Amperes/600 Volts

