

isc Silicon NPN Power Transistor

KSD5000

DESCRIPTION



- High Breakdown Voltage-
: $V_{CBO} = 1500V$ (Min)
- High Switching Speed
- High Reliability
- Built-in Damper Diode

APPLICATIONS

- Designed for color TV horizontal output applications

ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	1500	V
V_{CEO}	Collector-Emitter Voltage	800	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current- Continuous	2.5	A
I_{CP}	Collector Current-Peak	10	A
P_C	Collector Power Dissipation @ $T_c = 25^\circ C$	80	W
T_J	Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-55~150	$^\circ C$

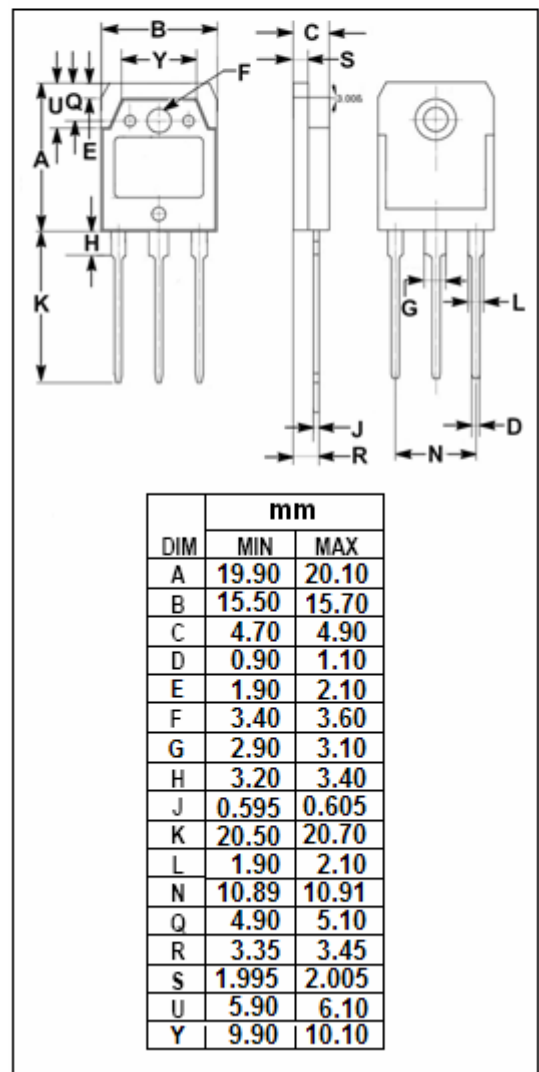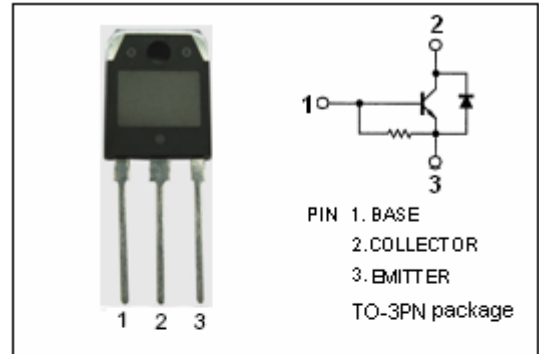

isc Silicon NPN Power Transistor**KSD5000****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=2A; I_B=0.6A$			8.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=2A; I_B=0.6A$			1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=800V; I_E=0$			10	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=4V; I_C=0$	40		130	mA
h_{FE}	DC Current Gain	$I_C=0.5A; V_{CE}=5V$	8			
f_T	Current-Gain—Bandwidth Product	$I_C=0.5A; V_{CE}=10V$		3		MHz
V_{ECF}	C-E Diode Forward Voltage	$I_F=2.5A$			2.0	V
t_f	Fall Time	$I_C=2A, I_{B1}=0.6A; I_{B2}=-1.2A$ $R_L=100\Omega; V_{CC}=200V$			0.4	μs