

SWITCHING APPLICATION.


HAMMER DRIVER, PULSE MOTOR DRIVE APPLICATION.

FEATURE


- High DC Current Gain : $h_{FE}=2000(\text{Min.})$ ($V_{CE}=2V, I_C=1A$).

MAXIMUM RATING ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	100	V
Collector-Emitter Voltage	V_{CEO}	80	V
Emitter-Base Voltage	V_{EBO}	5	V
Continuous Collector Current	I_C	4	A
Collector Power Dissipation ($T_c=25^\circ\text{C}$)	P_C	30	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 ~ 150	$^\circ\text{C}$

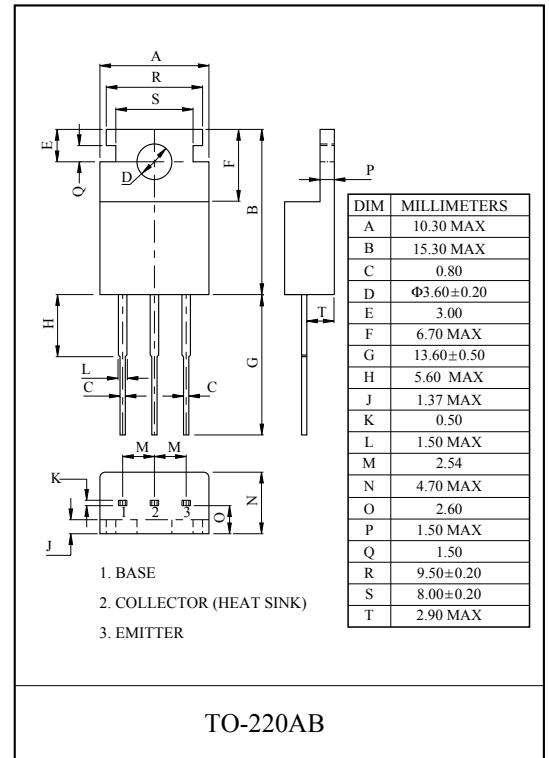

EQUIVALENT CIRCUIT

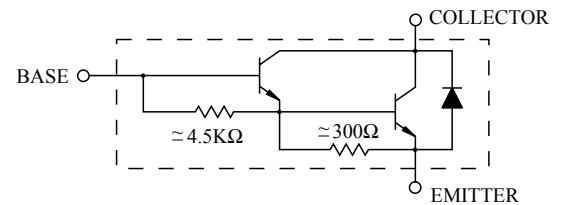

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CBO}	$V_{CB}=100V, I_E=0$	-	-	20	μA
Emitter Cut-off Current		I_{EBO}	$V_{EB}=5V, I_C=0$	-	-	2.5	mA
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=10\text{mA}, I_B=0$	80	-	-	V
DC Current Gain		$h_{FE(1)}$	$V_{CE}=2V, I_C=1A$	2000	-	-	
		$h_{FE(2)}$	$V_{CE}=2V, I_C=3A$	1000	-	-	
Saturation Voltage	Collector-Emitter	$V_{CE(sat)}$	$I_C=3A, I_B=6\text{mA}$	-	-	1.5	V
	Base-Emitter	$V_{BE(sat)}$	$I_C=3A, I_B=6\text{mA}$	-	-	2.0	
Switching Time	Turn-on Time	t_{on}	<p>$I_{B1}=I_{B2}=6\text{mA}$ DUTY CYCLE $\leq 1\%$</p>	-	0.2	-	μS
	Storage Time	t_{stg}		-	1.5	-	
	Fall Time	t_f		-	0.6	-	

