




Relay Type: L91 C S DC12V
 Contact Form: 1C
 Sealing Type: NIL-Open
 S: Sealed
 Coil Voltage: - 5 ~ 24VDC

Features	Dimension L * W * H (mm)	32.5 * 27.5 * 26			
	Terminal Type	PCB			
	Weight	32 gm Approximately			
Contact Data	Contact Form	1A, 1C			
	Contact Material	Ag Alloy			
	Contact Capacity	NO: 30A @ 240VAC, NC: 20A @ 240VAC , 30A @ 28VDC			
Coil Data	Coil Voltage (DC)	5 ~ 24 VDC			
	Coil Power Consumption	0.93W			
	Coil Specification	Coil Voltage	Coil Resistance (Ω) ±10%	Pull in Voltage (VDC)	Drop Out Voltage (VDC)
		12 VDC	155	80%	5%
		24 VDC	660	80%	5%
General Data	Dielectric Strength	1500 VAC @ 50 Hz / Min (Between Open Contacts)			
		2500 VAC @ 50 Hz / Min (Between Coil & Contacts)			
	Insulation Resistance	500MΩ			
	Electrical Life	1 x 10 ⁵			
	Mechanical Life	1 x 10 ⁷			
Operating Temperature	- 55°C ~ + 85°C				

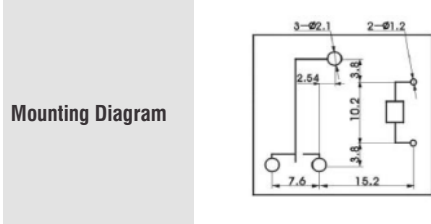

Application HVAC, Domestic Applications, Car Control Switching Box etc