



## 5.2 Common Cathode 0.39 Inch (9.9mm)

PRODUCT DESCRIPTION	
(1) 0.39 Inch (9.9mm) Height	(5) Gray or black color background
(2) Low current operation	(6) Common Cathode
(3) Excellent color and font characteristics	(7) RoHs Compliant Part
(4) Colors: White, blue, red, yellow and green	

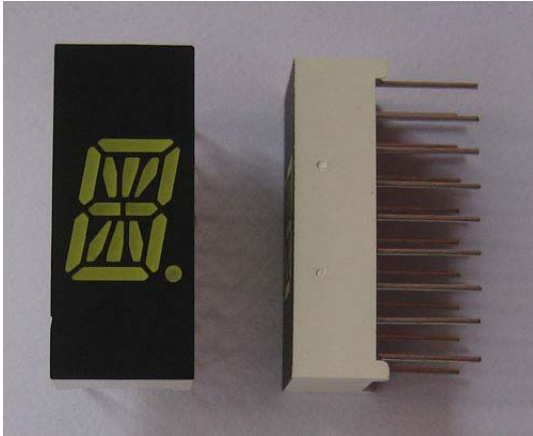

White Led display

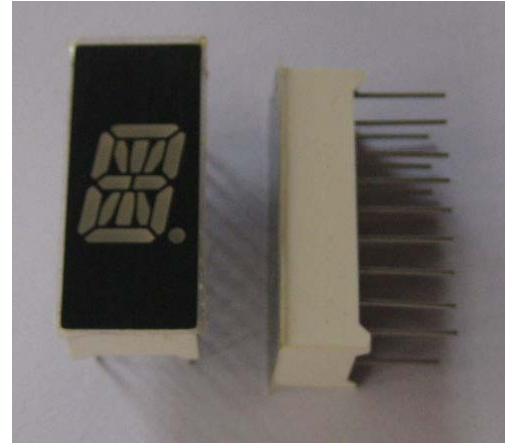

Blue, red, yellow and green Led display

### Absolute Maximum Rating (Ta = 25°C)

PARAMETER	RED	AMBER	GREEN	BLUE	WHITE	UNITS
DC Forward Current Per Segment	30	30	25	30	20	mA
Peak Current Per Segment <sup>(1)</sup>	70	50	50	25	25	mA
Avg. Forward Current (Pulse Operation) Per Segment	30	30	25	25	25	mA
Derating Linear From 25°C Per Segment	0.3					mA/°C
Reverse Voltage <sup>(2)</sup>	3					V
Operating Temperature	-25 to +85					°C
Storage Temperature	-30 to +85					°C

(1) Pulse conditions of 1/10 duty and 0.1msec width, for long operating life, max. of 20mA recommended

(2) Reverse biasing of the dot matrix is not recommend, will cause damage to the leds

### Electro-optical Characteristics (Ta = 25°C)

PART NUMBER	DICE MATERIAL (COLOR)	PEAK WAVELENGTH (nm)	MAX. REVERSE CURRENT / SEGMENT (uA)	VF (V) TYP	VF (V) MAX.	LUMINOUS INTENSITY / SEGMENT AVERAGE (IF = 20mA)
LEDA3914AUR11C	AlGaAs Red	660	10	1.8	2.3	25,000 ucd
LEDA3914TB11C	InGaN Blue	468	10	3.3	4.0	45,000 ucd
LEDA3914YG11C	GaP Green	568	10	1.9	2.3	25,000 ucd
LEDA3914UY11C	AlInGaP Amber	590	10	1.8	2.3	30,000 ucd
LEDA3914TW11C	InGaN White	5,500K	10	3.3	4.0	70,000 ucd

## DEVICE DIAGRAM

PIN NO.			
1	Anode J	10	Anode L
2	Anode H	11	Anode C
3	Anode F	12	Anode DP
4	Common Cathode	13	Common Cathode
5	Anode G1	14	Anode G2
6	Anode E	15	Anode B
7	Anode N	16	Anode K
8	Anode D	17	Common Cathode
9	Anode M	18	Anode A

