


3-Terminal Positive Voltage Regulator

LM7805XE3

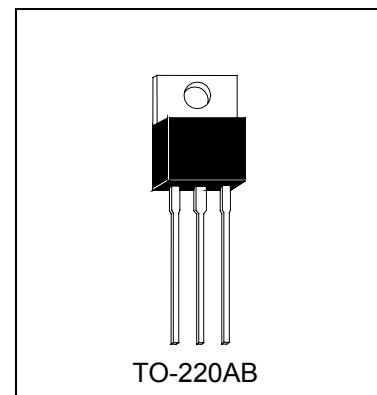

Description


The LM7805XE3 series of three-terminal positive regulators are available in the TO-220AB package. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation. Each employs internal current limiting, thermal shutdown and safe operating area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

LM7805XE3 is characterized for operation from 0°C to +125°C, and if operating temperature is always high, please refer to the power dissipation curve.

Absolute Maximum Ratings (Ta=25°C)

• Input Voltage	35 V
• Total Power Dissipation	Internally limited
• Operating Temperature Range	0 °C to +125 °C
• Maximum Junction Temperature	125 °C
• Storage Temperature Range	-55 °C to +150 °C
• Lead Temperature (Soldering 10S).....	230 °C


Typical Application

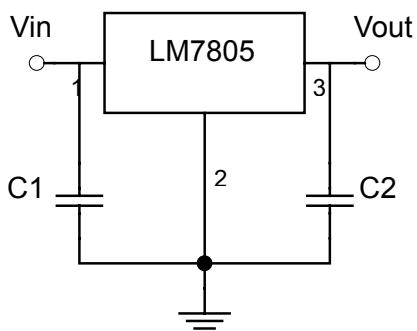

Note:

C1 and C2 are required if regulator is located far from power supply filter and load, or oscillation may induced on the loop.

Schematic Diagram

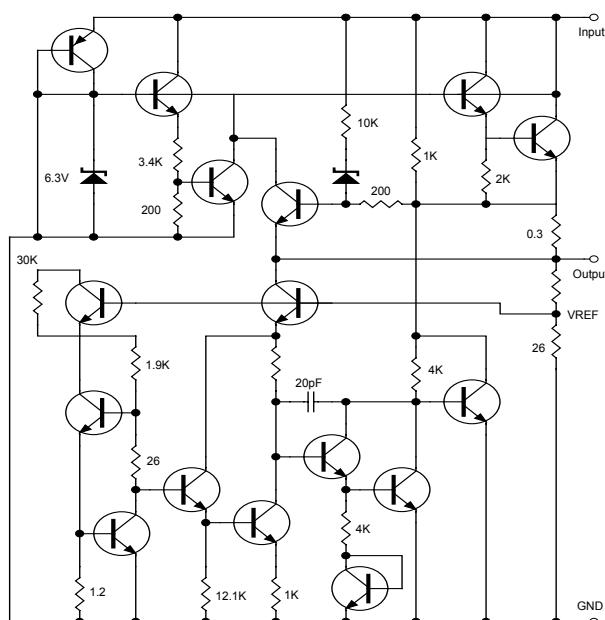




Electrical Characteristics

$V_{in}=10V$, $I_o=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$ (unless otherwise noted)

Symbol	Parameter	Conditions	LM7805A			Units
			Min	Typ	Max	
V_o	Output Voltage	$T_j=25^{\circ}C$	4.85	5	5.15	V
		$P_D \leq 15W$, $5mA \leq I_o \leq 1A$	4.85	5	5.15	
ΔV_o	Line Regulation	$T_j=25^{\circ}C$, $7V \leq V_{in} \leq 25V$	-	4	50	mV
		$T_j=25^{\circ}C$, $8V \leq V_{in} \leq 25V$	-	1.6	25	
ΔV_o	Load Regulation	$5mA \leq I_o \leq 1.5A$	-	-	100	mV
		$250mA \leq I_o \leq 750mA$	-	-	50	
I_Q	Quiescent Current	$I_o \leq 1A$, $T_j=25^{\circ}C$	-	5.5	8	mA
ΔI_Q	Quiescent Current Change	$5mA \leq I_o \leq 1A$	-	-	0.5	mA
		$7V \leq V_{in} \leq 25V$	-	-	1.3	
V_n	Output Noise Voltage	$T_a=25^{\circ}C$, $10Hz \leq f \leq 100KHz$	-	40	200	uV
RR	Ripple Rejection	$8V \leq V_{in} \leq 18V$, $f=120Hz$	-	68	-	dB
V_D	Dropout Voltage	$T_j=25^{\circ}C$, $I_o=1A$	-	2	-	V
I_{sc}	Short Circuit Current	$T_j=25^{\circ}C$	-	1.5	-	A
I_{pk}	Peak Output Current	$T_j=25^{\circ}C$	1.7	-	-	A
$\Delta V_o / \Delta T$	Average T_c of V_{out}	$0^{\circ}C \leq T_j \leq +125^{\circ}C$, $I_o=5mA$	-	-0.8	-	mV/ $^{\circ}C$

Symbol	Parameter	Conditions	LM7805B			Units
			Min	Typ	Max	
V_o	Output Voltage	$T_j=25^{\circ}C$	4.8	5	5.2	V
		$P_D \leq 15W$, $5mA \leq I_o \leq 1A$	4.75	5	5.25	
ΔV_o	Line Regulation	$T_j=25^{\circ}C$, $7V \leq V_{in} \leq 25V$	-	4	100	mV
		$T_j=25^{\circ}C$, $8V \leq V_{in} \leq 25V$	-	1.6	50	
ΔV_o	Load Regulation	$5mA \leq I_o \leq 1.5A$	-	-	100	mV
		$250mA \leq I_o \leq 750mA$	-	-	50	
I_Q	Quiescent Current	$I_o \leq 1A$, $T_j=25^{\circ}C$	-	5.5	8	mA
ΔI_Q	Quiescent Current Change	$5mA \leq I_o \leq 1A$	-	-	0.5	mA
		$7V \leq V_{in} \leq 25V$	-	-	1.3	
V_n	Output Noise Voltage	$T_a=25^{\circ}C$, $10Hz \leq f \leq 100KHz$	-	100	300	uV
RR	Ripple Rejection	$8V \leq V_{in} \leq 18V$, $f=120Hz$	62	73	-	dB
V_D	Dropout Voltage	$T_j=25^{\circ}C$, $I_o=1A$	-	2.5	-	V
I_{sc}	Short Circuit Current	$T_j=25^{\circ}C$	-	1.5	-	A
I_{pk}	Peak Output Current	$T_j=25^{\circ}C$	1.7	-	-	A
$\Delta V_o / \Delta T$	Average T_c of V_{out}	$0^{\circ}C \leq T_j \leq +125^{\circ}C$, $I_o=5mA$	-	-0.8	-	mV/ $^{\circ}C$

TO-220AB Dimension

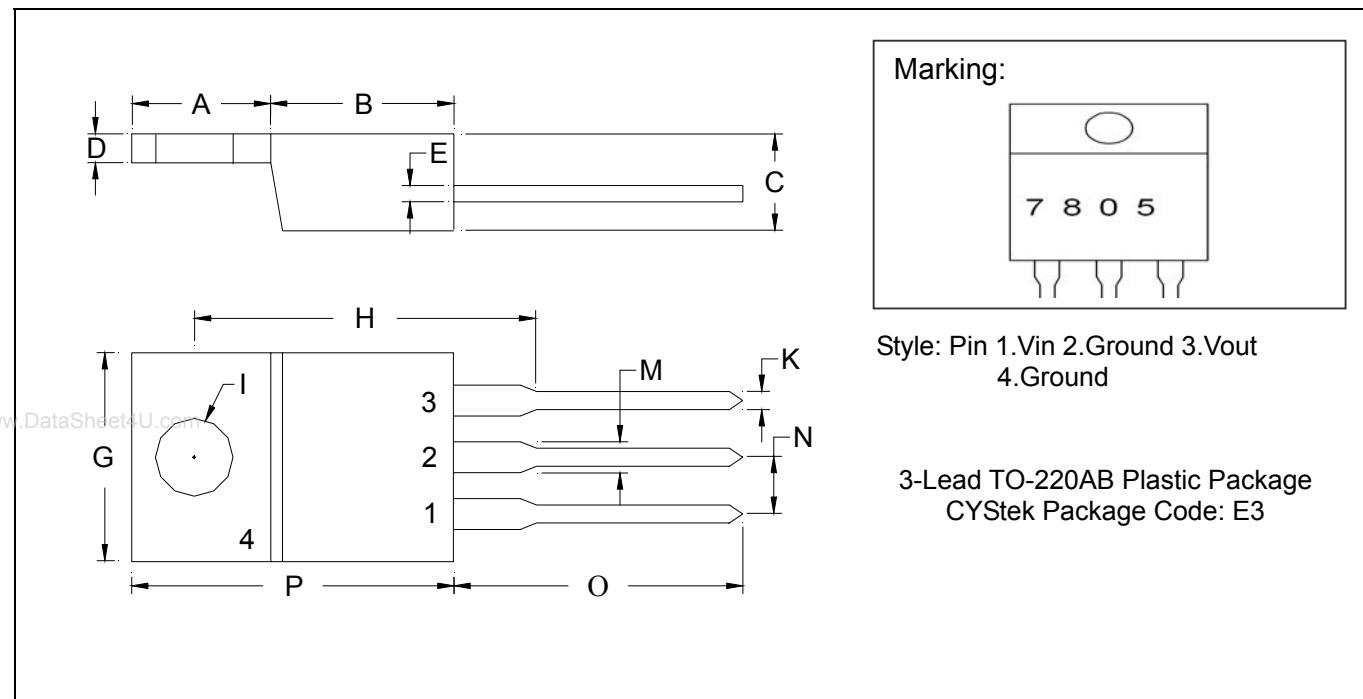

*: Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.2197	0.2949	5.58	7.49	I	-	*0.1508	-	*3.83
B	0.3299	0.3504	8.38	8.90	K	0.0295	0.0374	0.75	0.95
C	0.1732	0.185	4.40	4.70	M	0.0449	0.0551	1.14	1.40
D	0.0453	0.0547	1.15	1.39	N	-	*0.1000	-	*2.54
E	0.0138	0.0236	0.35	0.60	O	0.5000	0.5618	12.70	14.27
G	0.3803	0.4047	9.66	10.28	P	0.5701	0.6248	14.48	15.87
H	-	*0.6398	-	*16.25					

Notes: 1. Controlling dimension: millimeters.

2. Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 3. If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material:

- Lead: 42 Alloy ; solder plating
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.