



PRESS FIT AUTOMOTIVE RECTIFIER (LUCAS)

LPR501 THRU LPR506

VOLTAGE RANGE 100 to 600 Volts**CURRENT** 50.0 Amperes


TECHNICAL SPECIFICATION:

FEATURES

- Low Leakage
- Low forward voltage drop
- High current capability
- High forward surge current capacity

MECHANICAL DATA

- Technology: Glass passivated chip with vacuum soldered
- Case: Copper case
- Polarity: As marked of case bottom
- Lead: Plated lead, solderable per MIL-STD-202E method 208C
- Mounting: Press Fit
- Weight: 0.23 ounces, 6.58 grams

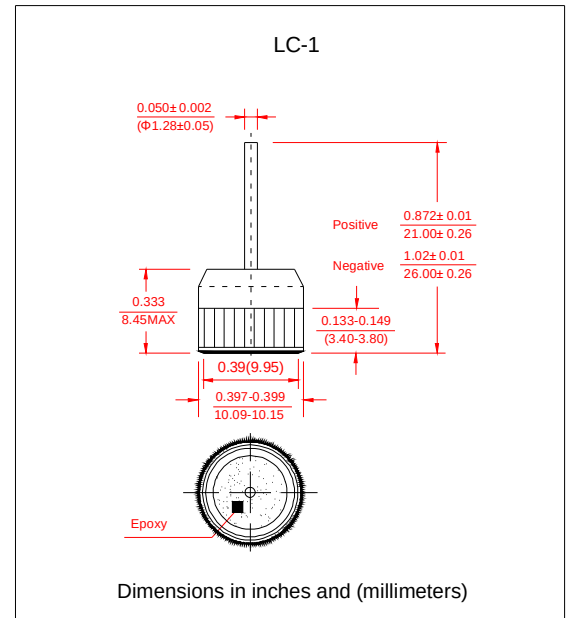

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60HZ, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	LPR501	LPR502	LPR503	LPR504	LPR506	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	100	200	300	400	600	Volts
Maximum RMS Voltage	V _{RMS}	70	140	210	280	420	Volts
Maximum DC Blocking Voltage	V _{DC}	100	200	300	400	600	Volts
Maximum Average Forward Rectified Current, At Tc=105°C	I _(AV)	50					Amps
Peak Forward Surge Current 3.3mS single half sine wave superimposed on Rated load (JEDEC method)	I _{FSM}	600					Amps
Rating for fusing (t<8.3ms)	I ² t	1494					A ² S
Maximum instantaneous Forward Voltage at 100A	V _F	1.05					Volts
Maximum DC Reverse Current at Rated TA=25°C DC Blocking Voltage TA=100°C	I _R	5.0					UA
		450					
Typical Thermal Resistance	R _{θJC}	0.8					°C/W
Operating and Storage Temperature Range	T _J ,T _{STG}	(-65 to +175)					°C

Notes:

1. Enough heatsink must be considered in application.



PRESS FIT AUTOMOTIVE RECTIFIER (LUCAS)


LPR501 THRU LPR506

VOLTAGE RANGE 100 to 600 Volts


CURRENT 50.0 Amperes

RATINGS AND CHARACTERISTIC CURVES LPR501 THRU LPR506


F1G.1 TYPICAL FORWARD CURRENT DERATING CURVE

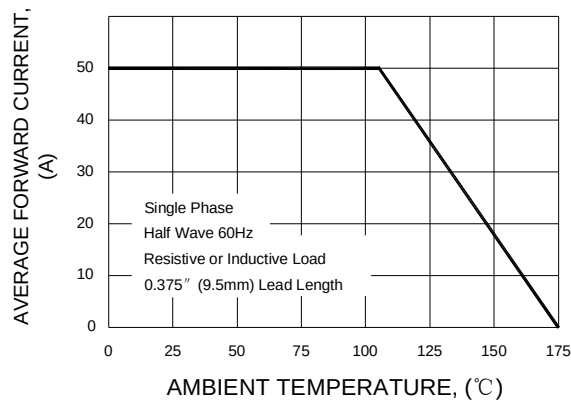

F1G.2 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

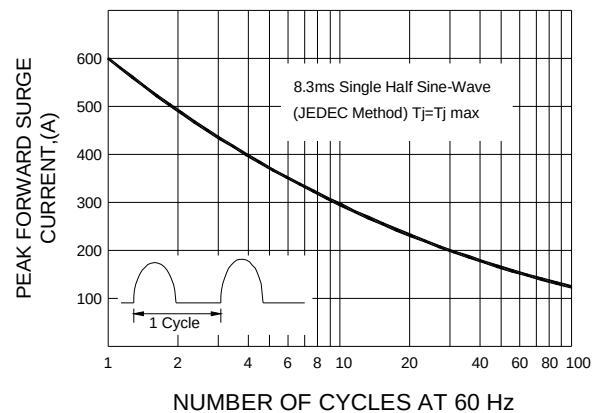

F1G.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

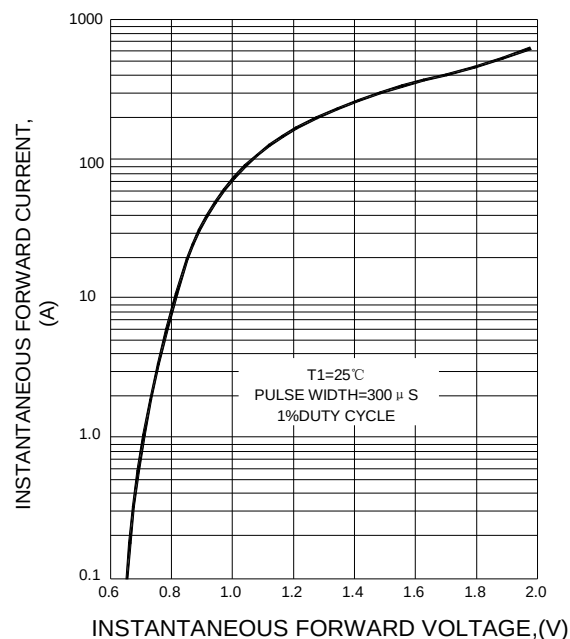

F1G.4 FORWARD POWER DISSIPATION

