



ELECTRONICS

Product Information

Model No. :

Parts Code : V33A00018700

Customer : TOSHIBA

DATE : 27. Nov. 2007

SAMSUNG TFT-LCD**MODEL : LTA520HE10-001**

The Information Described in this Specification is Preliminary and can be changed without prior notice

APPROVAED BY	DATE	PREPARED BY	DATE
<i>Kyungheon Ko</i>	27.Nov.2007	<i>Sun-ck. Song</i>	27.Nov.2007

LCD Business

Samsung Electronics Co . , LTD.

MODEL	LTA520HE10-001	Doc. No	06-000-S-071127	Page	1 / 27
-------	----------------	---------	-----------------	------	--------

Contents

Revision History	(3)
General Description	(4)
General Information	(4)
1. Absolute Maximum Ratings	(5)
2. Optical Characteristics	(7)
3. Electrical Characteristics	(10)
3.1 TFT LCD Module	
3.2 Back Light Unit	
3.3 Inverter Input & Specification	
4. Input Terminal Pin Assignment	(13)
4.1 Input Signal & Power	
4.2 Inverter Input Pin Configuration	
4.3 Inverter Input Power Sequence	
4.4 LVDS Interface	
4.5 Input Signals, Basic Display Colors and Gray Scale of Each Color	
5. Interface Timing	(19)
5.1 Timing Parameters (DE only mode)	
5.2 Timing Diagrams of interface Signal (DE only mode)	
5.3 Power ON/OFF Sequence	
6. Outline Dimension	(22)
7. Packing	(24)
8. Marking & Others	(25)
9. General Precaution	(26)
9.1 Handling	
9.2 Storage	
9.3 Operation	
9.4 Operation Condition Guide	
9.5 Others	

MODEL

LTA520HE10-001

Doc. No

06-000-S-071127

Page

2 / 27

*** Revision History**

Date	Rev. No	Page	Summary
Nov.27. 2007	000	all	First issued

www.panelook.com

General Description

Description

LTA520HE10-001 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT (Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit. The resolution of a 52.0" is 1920 x 1080 and this model can display up to 1.07 billion colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide an excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV and High Definition TV.

Features

- RoHS compliance (Pb-free)
- High contrast ratio & aperture ratio with color gamut
- SPVA (Super Patterned Vertical Align) mode
- Wide viewing angle ($\pm 178^\circ$)
- High speed response & Natural motion (DFR : Double Frame Rate)
- FHD resolution (16:9)
- Low Power consumption
- Direct Type 24 CCFLs (Cold Cathode Fluorescent Lamp)
- DE (Data Enable) mode
- 4ch LVDS (Low Voltage Differential Signaling) interface

General Information

Items	Specification	Unit	Note
Module Size	1226.0(H _{TYP}) x 719.2(V _{TYP})	mm	±1.0mm
	58.5(D _{MAX})		
Weight	19.000 (Max.)	g	
Pixel Pitch	0.6(H) x 0.6(V)	mm	
Active Display Area	1152.0(H) x 648.0(V)	mm	
Surface Treatment	Haze 14% , Hard-coating (3H)		
Display Colors	10 bit – 1.07B	colors	
Number of Pixels	1920 x 1080	pixel	
Pixel Arrangement	RGB vertical stripe		
Display Mode	Normally Black		
Luminance of White	500 (Typ.)	cd/m ²	

MODEL

LTA520HE10-001

Doc. No

06-000-S-071127

Page

4 / 27

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{DD}	GND-0.5	13.0	V	(1)
Dimming Control	Max. Lum	-	5	V	
Storage temperature	T_{STG}	-20	60	°C	(2)
Operating temperature	T_{OPR}	0	50	°C	
Surface temperature	T_{SUR}	0	60	°C	(3)
Shock (non - operating)	S_{nop}		30	G	(4)
Vibration (non - operating)	V_{nop}		1.5	G	(5)

Note (1) $T_a = 25 \pm 2 \text{ }^\circ\text{C}$

(2) Temperature and relative humidity range are shown in the figure below.

a. 90 % RH Max. ($T_a \leq 39 \text{ }^\circ\text{C}$)

b. Relative Humidity is 90% or less. ($T_a > 39 \text{ }^\circ\text{C}$)

c. No condensation

(3) Although abnormal visual problems can be occurred in T_{SUR} range, the polarizer is not damaged in this range

(4) 11ms, sine wave, one time for $\pm X, \pm Y, \pm Z$ axis

(5) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis

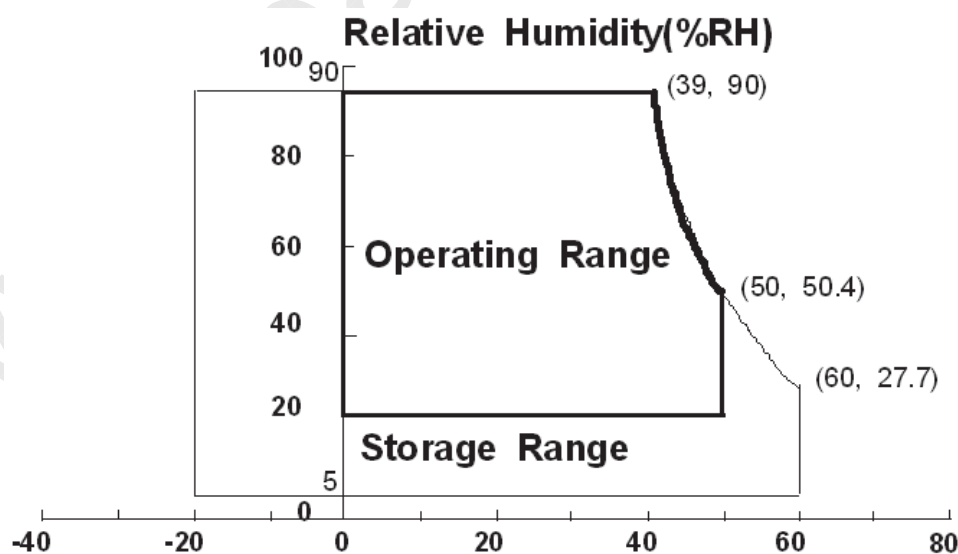


Fig. Temperature and Relative humidity range

2. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.

Measuring equipment : TOPCON RD-80S, TOPCON SR-3, ELDIM EZ Contrast

($T_a = 25 \pm 2^\circ\text{C}$, $V_{DD}=12.0\text{V}$, $f_v=120\text{Hz}$, $f_{DCLK}=297\text{MHz}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note	
Contrast Ratio (Center of screen)	C/R		TBD	3000	-		(1) SR-3	
Response Time	Rising	Tr	-	12	20	msec	(3) RD-80S	
	Falling	Tf	-	6	8			
	G-to-G	Tg	-	6	8			
Luminance of White (Center of screen)	Y_L	Normal $\theta_{L,R}=0$ $\theta_{U,D}=0$	400	500	-	cd/m ²	(4) SR-3	
Color Chromaticity (CIE 1931)	Red	Rx	Viewing Angle	0.653	TYP. -0.03	TYP. +0.03	(5),(6) SR-3	
		Ry		0.326				
	Green	Gx		0.213				
		Gy		0.673				
	Blue	Bx		0.147				
		By		0.069				
	White	Wx		0.280				
		Wy		0.290				
Color Gamut	-	-	90	-	%	(5) SR-3		
Color Temperature	-	-	-	10000	-	K		
Viewing Angle	Hor.	θ_L	C/R \geq 10	75	89	-	Degree	(6) EZ-Contrast
		θ_R		75	89	-		
	Ver.	θ_U		75	89	-		
		θ_D		75	89	-		
Brightness Uniformity (9 Points)	B_{uni}		-	-	25	%	(2) SR-3	

- Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the back light at the given temperature for stabilization of the back light. This should be measured in the center of screen.

Environment condition : $T_a = 25 \pm 2^\circ\text{C}$

MODEL

LTA520HE10-001


Doc. No

06-000-S-071127


Page

6 / 27

Photo detector	Field
SR-3	1°
BM-7	2°

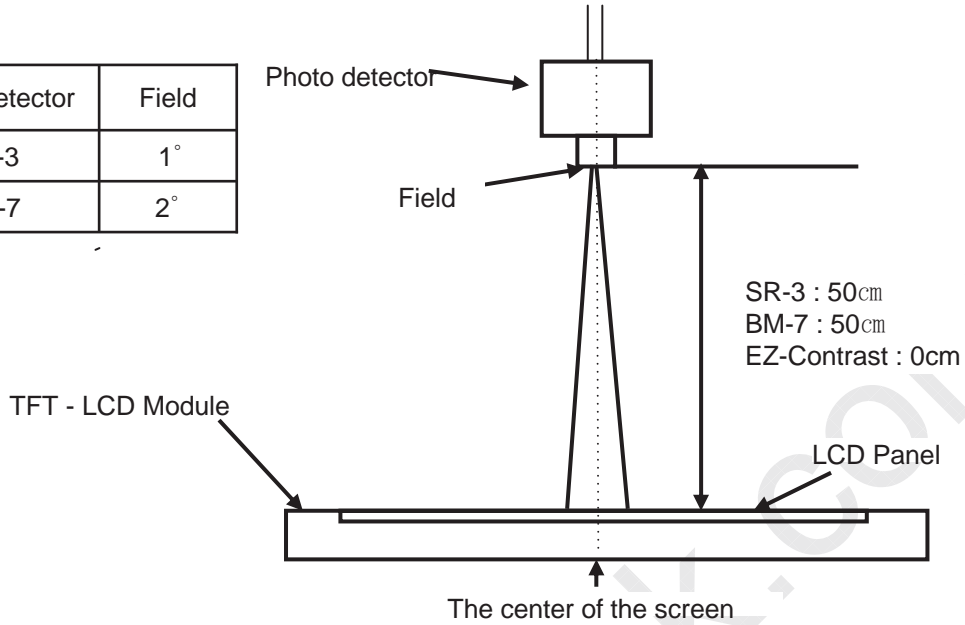

- Definition of test point

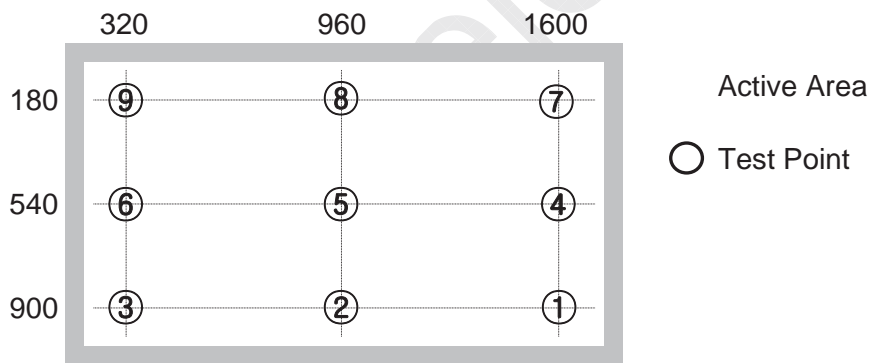

Note (1) Definition of Contrast Ratio (C/R)

: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C/R = \frac{G \max}{G \min}$$

Gmax : Luminance with all pixels white

Gmin : Luminance with all pixels black

MODEL	LTA520HE10-001	Doc. No	06-000-S-071127	Page	7 / 27
-------	----------------	---------	-----------------	------	--------


Note (2) Definition of 9 points brightness uniformity at maximum dimming volatage
(Test Pattern : Full White)

$$B_{uni} = 100 * \frac{(B_{max} - B_{min})}{B_{max}}$$

Bmax : Maximum brightness

Bmin : Minimum brightness

Note (3) Definition of Response time : Sum of Tr, Tf

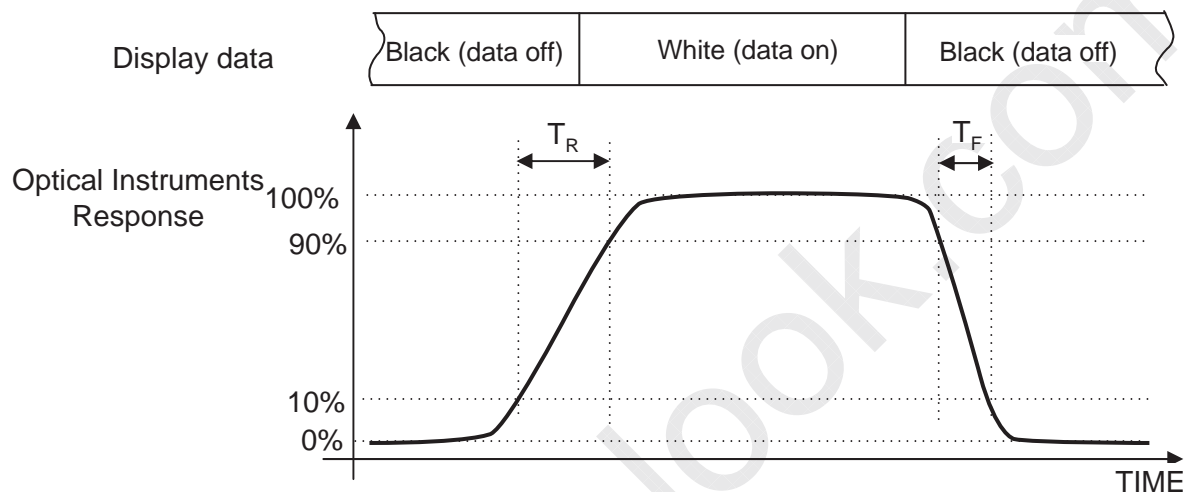


Note (4) Definition of Luminance of White : Luminance of white at center point ⑤

Note (5) Definition of Color Chromaticity (CIE 1931)

Color coordinate of Red, Green, Blue & White at center point ⑤

Note (6) Definition of Viewing Angle

: Viewing angle range ($C/R \geq 10$)

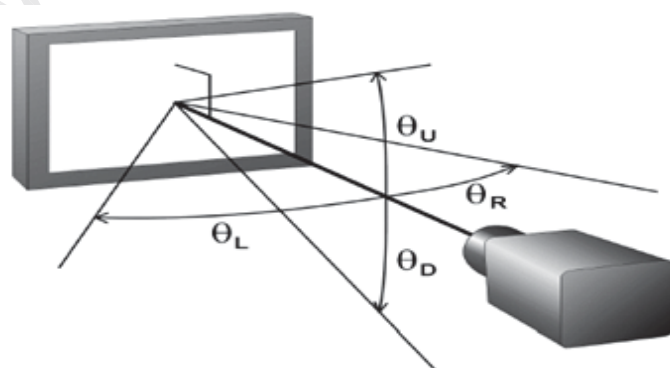

3. Electrical Characteristics

3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$T_a = 25^\circ\text{C} \pm 2^\circ\text{C}$

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply	V_{DD}	11	12	13	V	(1)
Current of Power Supply	(a) Black	-	1100	-	mA	(2),(3)
	(b) White	-	1200	1350	mA	
	(c) N-pattern	-	2320	2550	mA	
Vsync Frequency	f_V	95	120	125	Hz	
Hsync Frequency	f_H	120	132	140	kHz	
Main Frequency	f_{DCLK}	270	297	307	MHz	
Rush Current	I_{RUSH}	-	-	7	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD} .

(2) $f_V=120\text{Hz}$, $f_{DCLK} = 297\text{MHz}$, $V_{DD} = 12.0\text{V}$, DC Current.

(3) Power dissipation check pattern (LCD Module only)


a) Black Pattern




b) White Pattern



c) N-pattern



(4) Measurement Conditions

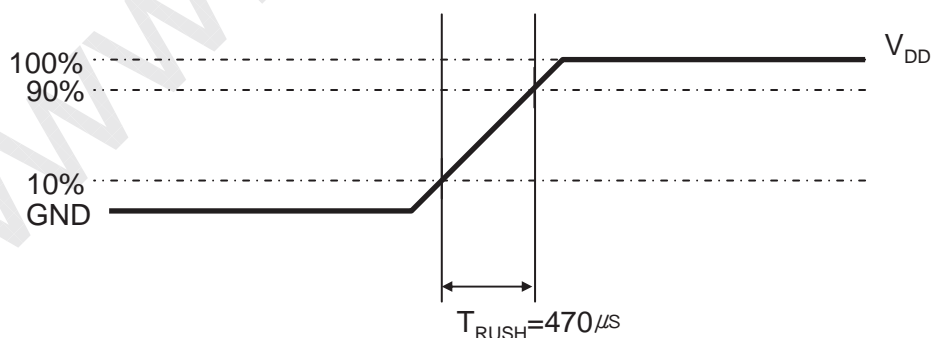


Rush Current I_{RUSH} can be measured when T_{RUSH} is $470 \mu\text{s}$.

3.2 Back Light Unit

The back light unit contains 24 direct-lighting type CCFLs (Cold Cathode Fluorescent Lamp). The characteristics of lamps are shown in the following tables.

$T_a = 25 \pm 2^\circ\text{C}$

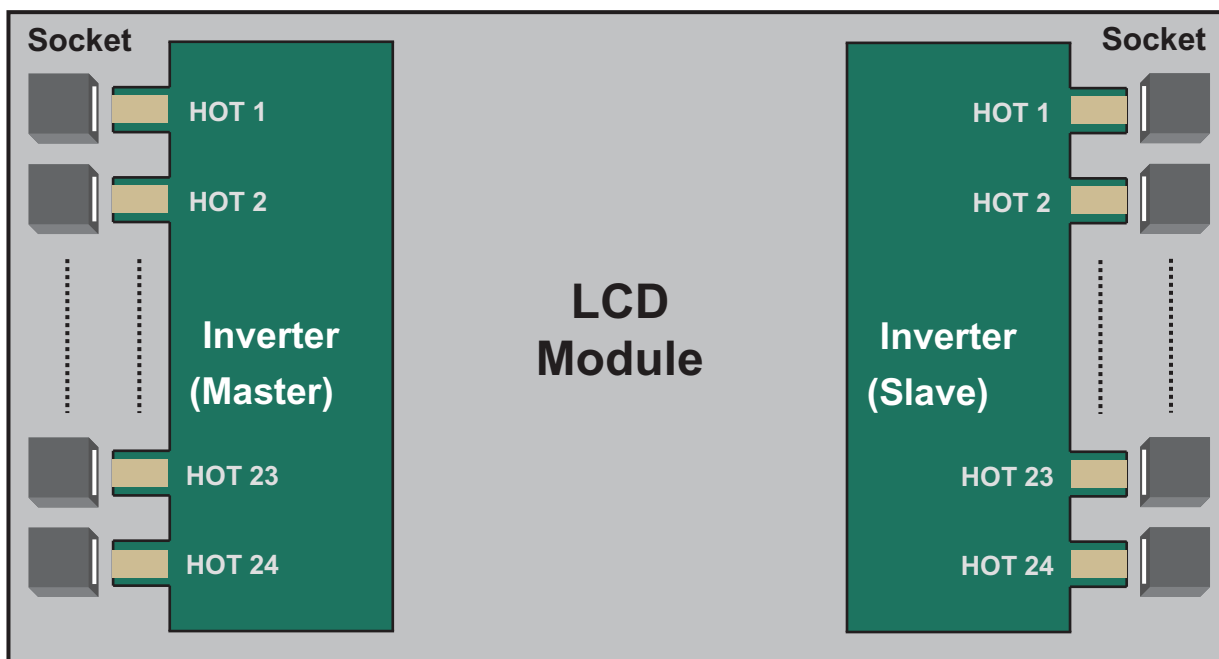

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Lamp Voltage	V_L	-	1810	-	Vrms	-
Operating Life Time	Hr	35,000	-	-	Hour	(1)
Lamp Current	I_L	5.0	-	7.0	mArms	-
Start up Voltage	V_S	-	-	0°C : 2300	Vrms	-
				25°C : 2480		

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition : $T_a = 25 \pm 2^\circ\text{C}$, $I_L = 7.0\text{mA}$, For Single Lamp Only]

3.3 Inverter Input Condition & Specification

Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	V _{in}	-	22.8	24	25.2	V	Ta=25±2 °C
Input Current	I _{RUSH}	V _{in} =24.0V V _{dim} =3.3V Ta=25 °C	-	12.2	13.4	A	(1)
			-	10.2	11.2		(2)
Lamp Current	I _{O, max}	V _{in} =24.0V V _{dim} =3.3V	5.3	6.0	6.5	mArms	After 2hour Warm up
Frequency	F _{LAMP}	V _{in} =24.0 V	40	42	44	kHz	-
Backlight On/Off	ON	V _{in} =24.0 V	2.4	-	5.5	V	-
	OFF	V _{in} =24.0 V	0	-	0.8		
Dimming Control	V _{DIM}	Max Lum PWM = 100%	3.3	-	-	V	-
		Min. Lum PWM = 20%	-	0	-		

Note) Power Consumption is measured when 500[cd/m²] of luminance which is the typical luminance.

Lamp Current is measured at the point before Lamp.

(1) Max Value of the Power Consumption is measured during initial turn-on time* of the backlight.

(2) Max Value of the Power Consumption is measured after 60 min warm-up.

* Initial turn-on time : From 0sec to 60min after turn-on

4. Input Terminal Pin Assignment

4.1.1 Input Signal & Power

Connector : FI-RE41S-HF (JAE)
IS050-C41B-C38 (UJU)

Pin	Symbol	Description	Pin	Symbol	Description
1	12V	DC power supply	21	Rx1[D]P	1 st , 5 th LVDS Signal +
2	12V	DC power supply	22	Rx1[E]N	1 st , 5 th LVDS Signal -
3	12V	DC power supply	23	Rx1[E]P	1 st , 5 th LVDS Signal +
4	12V	DC power supply	24	GND	Ground
5	12V	DC power supply	25	Rx3[A]N	3 rd , 7 th LVDS Signal -
6	GND	Ground	26	Rx3[A]P	3 rd , 7 th LVDS Signal +
7	GND	Ground	27	Rx3[B]N	3 rd , 7 th LVDS Signal -
8	GND	Ground	28	Rx3[B]P	3 rd , 7 th LVDS Signal +
9	GND	Ground	29	Rx3[C]N	3 rd , 7 th LVDS Signal -
10	Rx1[A]N	1 st , 5 th LVDS Signal -	30	Rx3[C]P	3 rd , 7 th LVDS Signal +
11	Rx1[A]P	1 st , 5 th LVDS Signal +	31	GND	Ground
12	Rx1[B]N	1 st , 5 th LVDS Signal -	32	Rx3CLK-	3 rd , 7 th LVDS Clock -
13	Rx1[B]P	1 st , 5 th LVDS Signal +	33	Rx3CLK+	3 rd , 7 th LVDS Clock +
14	Rx1[C]N	1 st , 5 th LVDS Signal -	34	GND	Ground
15	Rx1[C]P	1 st , 5 th LVDS Signal +	35	Rx3[D]N	3 rd , 7 th LVDS Signal -
16	GND	Ground	36	Rx3[D]P	3 rd , 7 th LVDS Signal +
17	Rx1CLK-	1 st , 5 th LVDS Clock -	37	Rx3[E]N	3 rd , 7 th LVDS Signal -
18	Rx1CLK+	1 st , 5 th LVDS Clock +	38	Rx3[E]P	3 rd , 7 th LVDS Signal +
19	GND	Ground	39	GND	Ground
20	Rx1[D]N	1 st , 5 th LVDS Signal -	40	No Connection	
			41	No Connection	

Note) No Connection : This Pins are only used for SAMSUNG internal using.

4.1.2 Input Signal & Power

Connector : FI-RE51S-HF (JAE)
IS050-C51B-C38(UJU)

PIN No.	Description		PIN No.	Description	
1	VDD(12V)		26	Even LVDS Signal	Rx4[0]P
2	VDD(12V)		27		Rx4[1]N
3	VDD(12V)		28		Rx4[1]P
4	VDD(12V)		29		Rx4[2]N
5	VDD(12V)		30		Rx4[2]P
6	GND		31		GND
7	GND		32		Rx4[CLK]N
8	GND		33		Rx4[CLK]P
9	GND		34		GND
10	Even LVDS Signal	Rx2[0]N	35		Rx4[3]N
11		Rx2[0]P	36		Rx4[3]P
12		Rx2[1]N	37		Rx4[4]N
13		Rx2[1]P	38		Rx4[4]P
14		Rx2[2]N	39		GND
15		Rx2[2]P	40		No connection
16		GND	41		No connection
17		Rx2[CLK]N	42	No connection	
18		Rx2[CLK]P	43	No connection	
19		GND	44	No connection	
20	Rx2[3]N	45	LVDS Option		
21	Rx2[3]P	46	No connection		
22	Rx2[4]N	47	No connection		
23	Rx2[4]P	48	No connection		
24	GND		49	No connection	
25	Even LVDS	Rx4[0]N	50	No connection	
			51	No connection	

Note) No Connection: This PINS are only used for SAMSUNG internal using.

Note (1) LVDS OPTION : If this PIN : HIGH (3.3 V) → Normal LVDS format

: LOW (GND or N.C) → JEIDA LVDS format

SEQUENCE : On = VDD(T1) ≥ LVDS Option ≥ Interface Signal(T2)

OFF = Interface Signal(T3) ≥ LVDS Option ≥ VDD

Note (2) Pin number starts from Right side

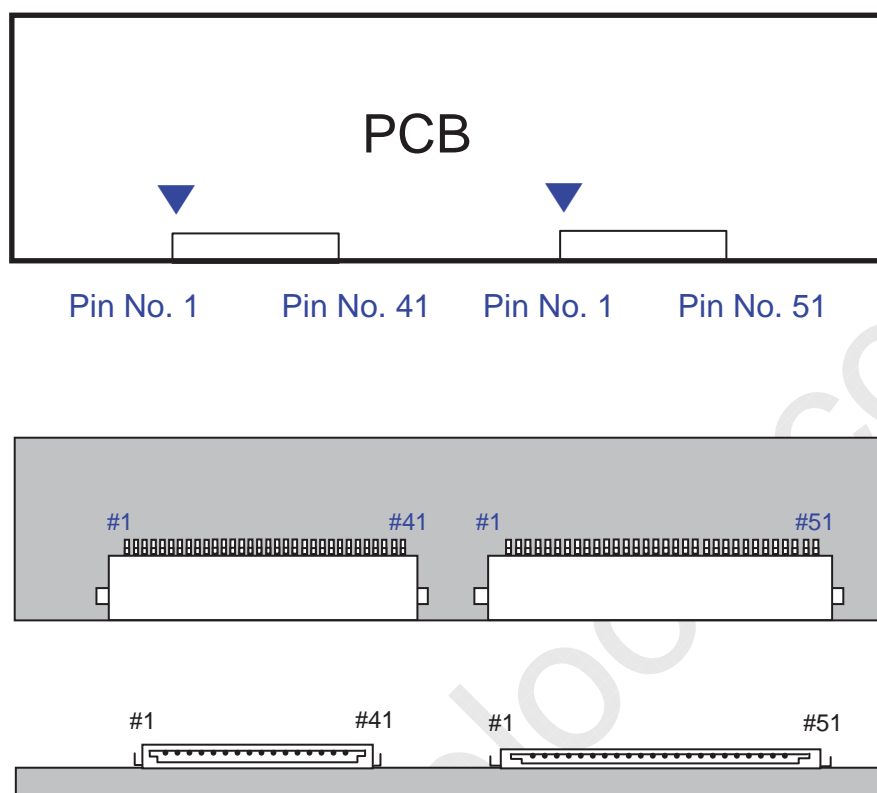


Fig. Connector diagram


- All GND pins should be connected together and also be connected to the LCD's metal chassis.
- All power input pins should be connected together.
- All NC pins should be separated from other signal or power.

4.2. Inverter Input Pin Configuration

Connector : S14B-PHA-SM-TB(LF) (JST)

Pin No.	Pin Configuration(FUNCTION)	
	Master (Left)	Slave (Right)
1	24 V	24 V
2	24 V	24 V
3	24 V	24 V
4	24 V	24 V
5	24 V	24 V
6	GND	GND
7	GND	GND
8	GND	GND
9	GND	GND
10	GND	GND
11	Error Detection [Normal : GND, Abnormal : OPEN COLLECTOR]	No Connection
12	Backlight On /Off	No Connection
13	Dimming Control	No Connection
14	No Connection	No Connection

4.3. Inverter Input Power Sequence

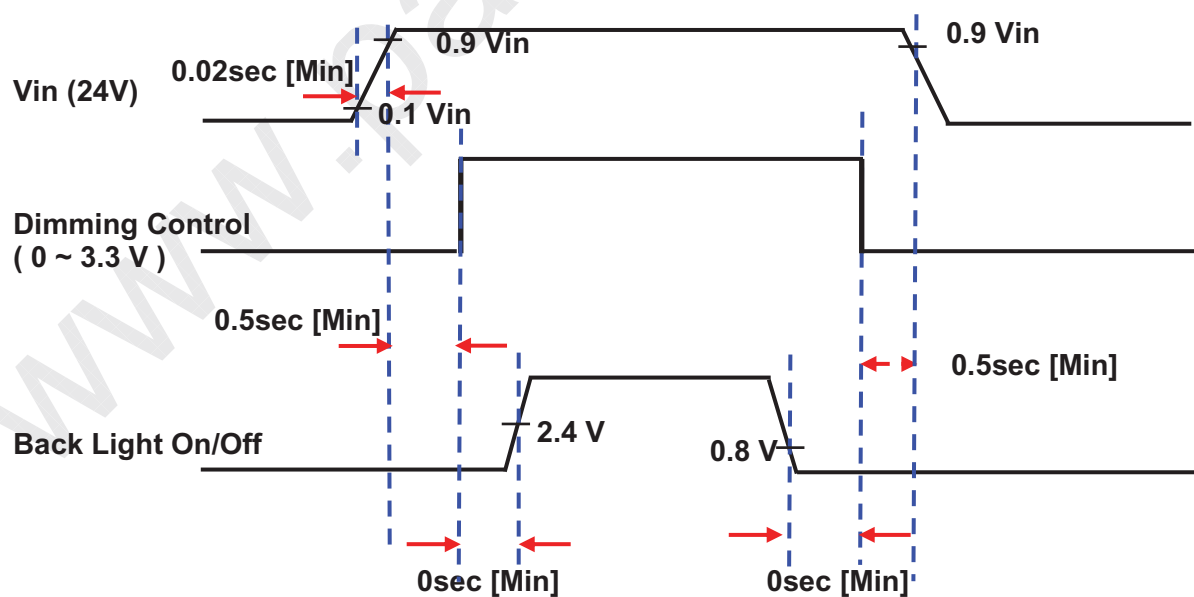

MODEL

LTA520HE10-001

Doc. No

06-000-S-071127

Page

15 / 27

4.4 LVDS Interface

- LVDS Receiver : Tcon (merged)
- Data Format (JEIDA)

	LVDS pin	JEIDA -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R4
	TxIN/RxOUT1	R5
	TxIN/RxOUT2	R6
	TxIN/RxOUT3	R7
	TxIN/RxOUT4	R8
	TxIN/RxOUT6	R9
	TxIN/RxOUT7	G4
TxOUT/RxIN1	TxIN/RxOUT8	G5
	TxIN/RxOUT9	G6
	TxIN/RxOUT12	G7
	TxIN/RxOUT13	G8
	TxIN/RxOUT14	G9
	TxIN/RxOUT15	B4
	TxIN/RxOUT18	B5
TxOUT/RxIN2	TxIN/RxOUT19	B6
	TxIN/RxOUT20	B7
	TxIN/RxOUT21	B8
	TxIN/RxOUT22	B9
	TxIN/RxOUT24	HSYNC
	TxIN/RxOUT25	VSYNC
	TxIN/RxOUT26	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R2
	TxIN/RxOUT5	R3
	TxIN/RxOUT10	G2
	TxIN/RxOUT11	G3
	TxIN/RxOUT16	B2
	TxIN/RxOUT17	B3
	TxIN/RxOUT23	RESERVED
TxOUT/RxIN4	TxIN/RxOUT28	R0
	TxIN/RxOUT29	R1
	TxIN/RxOUT30	G0
	TxIN/RxOUT31	G1
	TxIN/RxOUT32	B0
	TxIN/RxOUT33	B1
	TxIN/RxOUT34	RESERVED

MODEL

LTA520HE10-001

Doc. No

06-000-S-071127

Page

16 / 27

4.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																												GRAY SCALE LEVEL	
		RED									GREEN									BLUE											
		R0	R1	R2	R3	R4	R5	R6	R7	R8	R9	G0	G1	G2	G3	G4	G5	G6	G7	G8	G9	B0	B1	B2	B3	B4	B5	B6	B7		B8
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-
	CYAN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	MAGENTA	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0	
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1	
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~R1020	
	LIGHT ↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		1	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1021	
		0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1022	
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1023	
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0	
	DARK ↑	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1	
		0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~G1020	
	LIGHT ↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G1021	
		0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G1022	
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G1023	
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0		
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	B1	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	B2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~B1020	
	LIGHT ↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	B1021	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	B1022	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	B1023	

Note) Definition of Gray :
 Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)
 Input Signal : 0 = Low level voltage, 1 = High level voltage

5. Interface Timing


5.1 Timing Parameters (DE only mode)

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	270	297	307	MHz	-
Hsync		F_H	120	132	140	KHz	-
Vsync		F_V	95	120	125	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	1080	-	lines	-
	Vertical Total	T_V	1090	1125	1380	lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1920	-	clocks	-
	Horizontal Total	T_H	2090	2200	2350	clocks	-

Note) This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.


- (1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system
- (2) Internal VDD = 3.3V

5.2 Timing diagrams of interface signal (DE only mode)

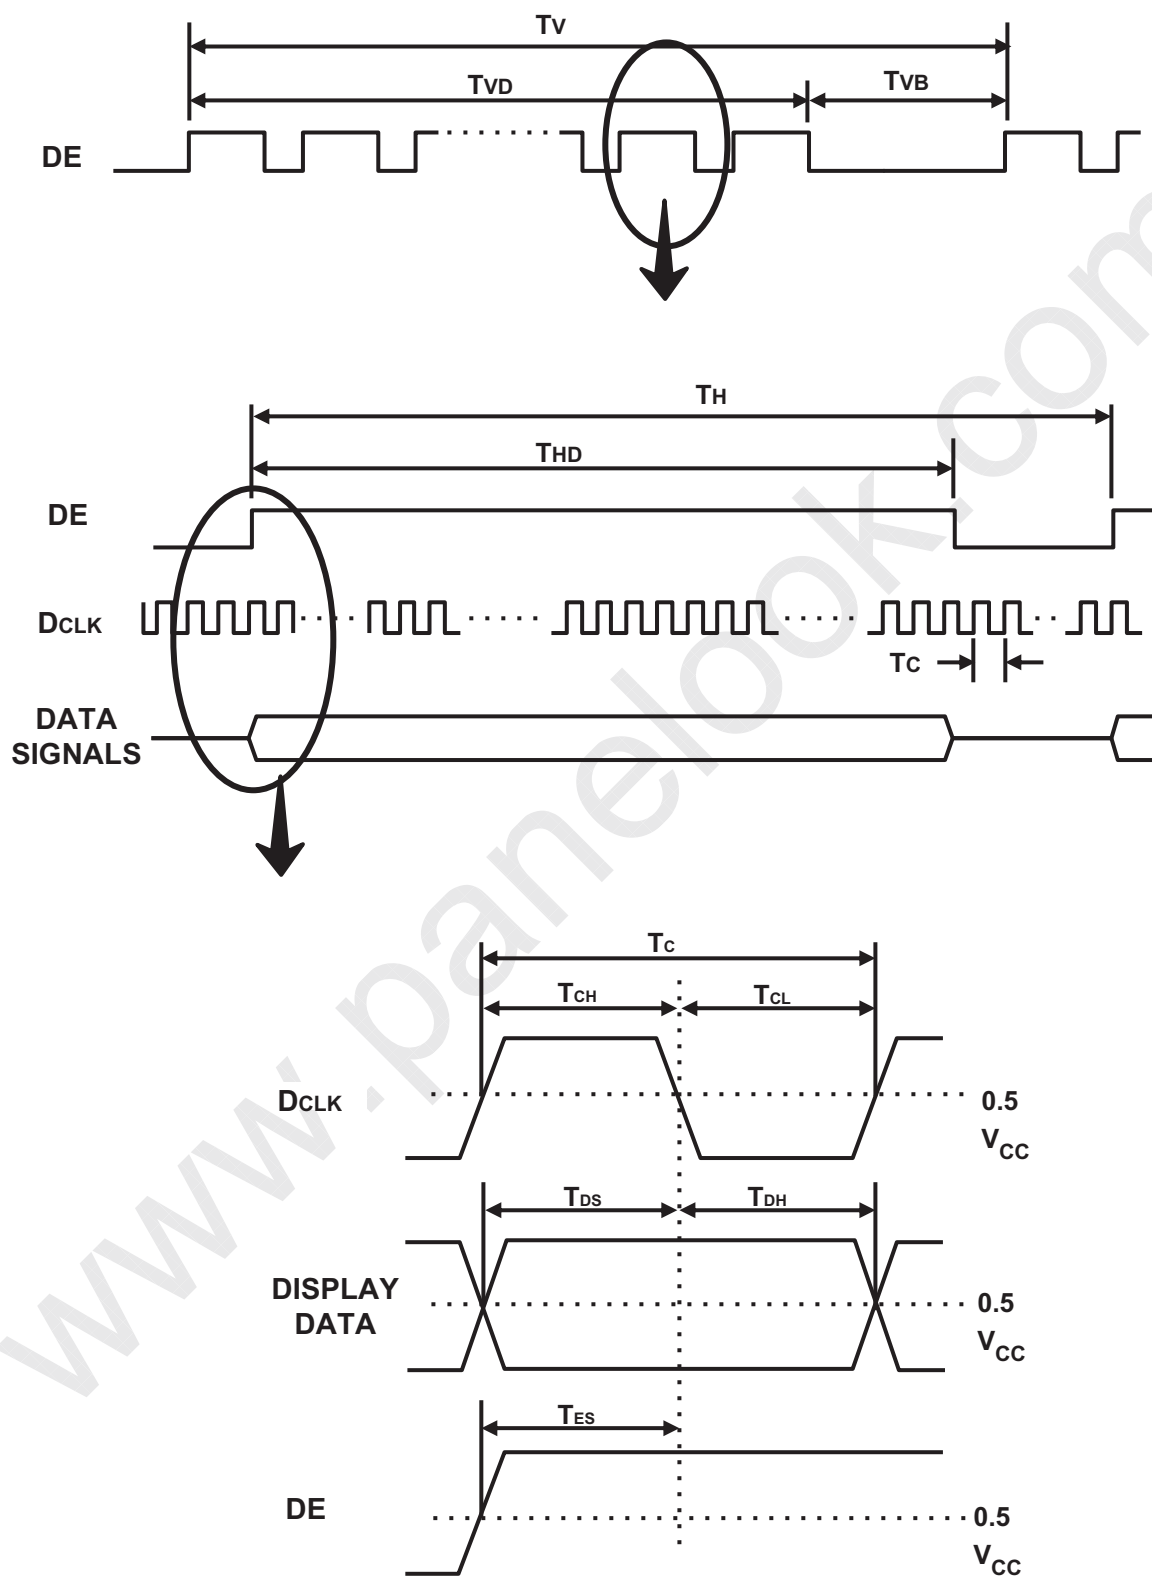

5.3 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

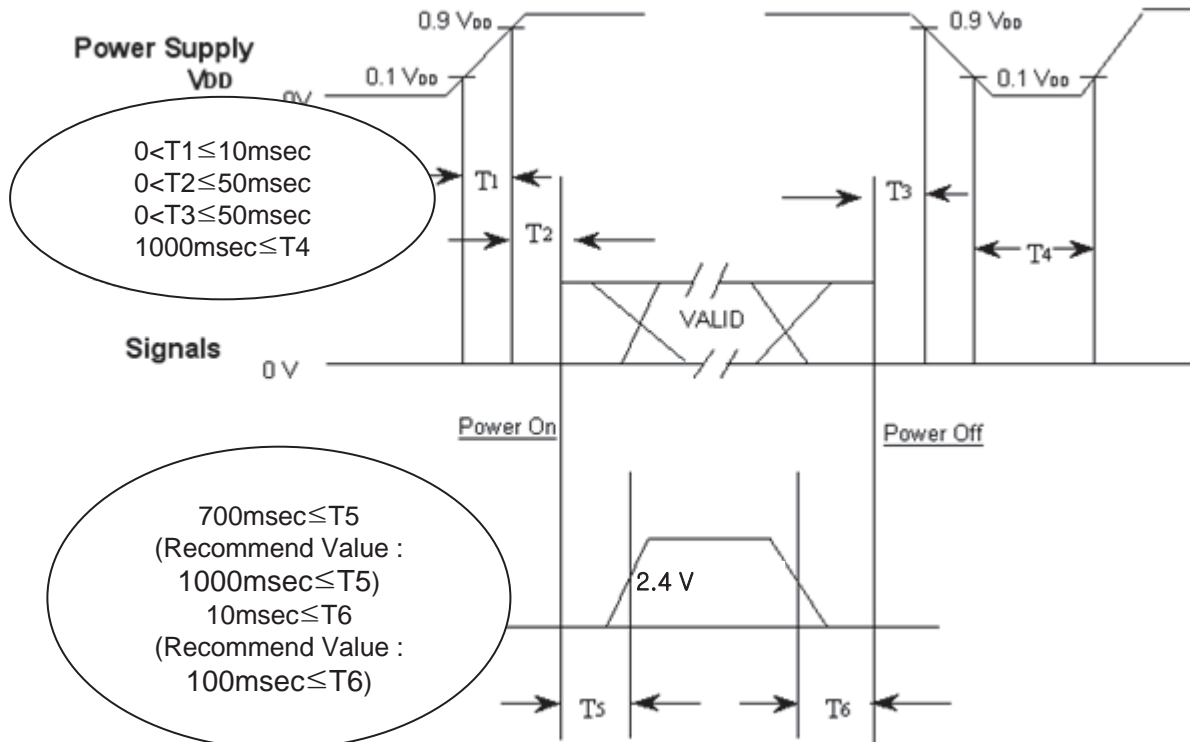

T1 : V_{DD} rising time from 10% to 90%

T2 : The time from V_{DD} to valid data at power ON.


T3 : The time from valid data off to V_{DD} off at power Off.

T4 : V_{DD} off time for Windows restart

T5 : The time from valid data to B/L enable at power ON.

T6 : The time from valid data off to B/L disable at power Off.

- The supply voltage of the external system for the Module input should be the same as the definition of V_{DD} .
- Apply the lamp voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
- In case of V_{DD} = off level, please keep the level of input signals low or keep a high impedance.
- T4 should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.

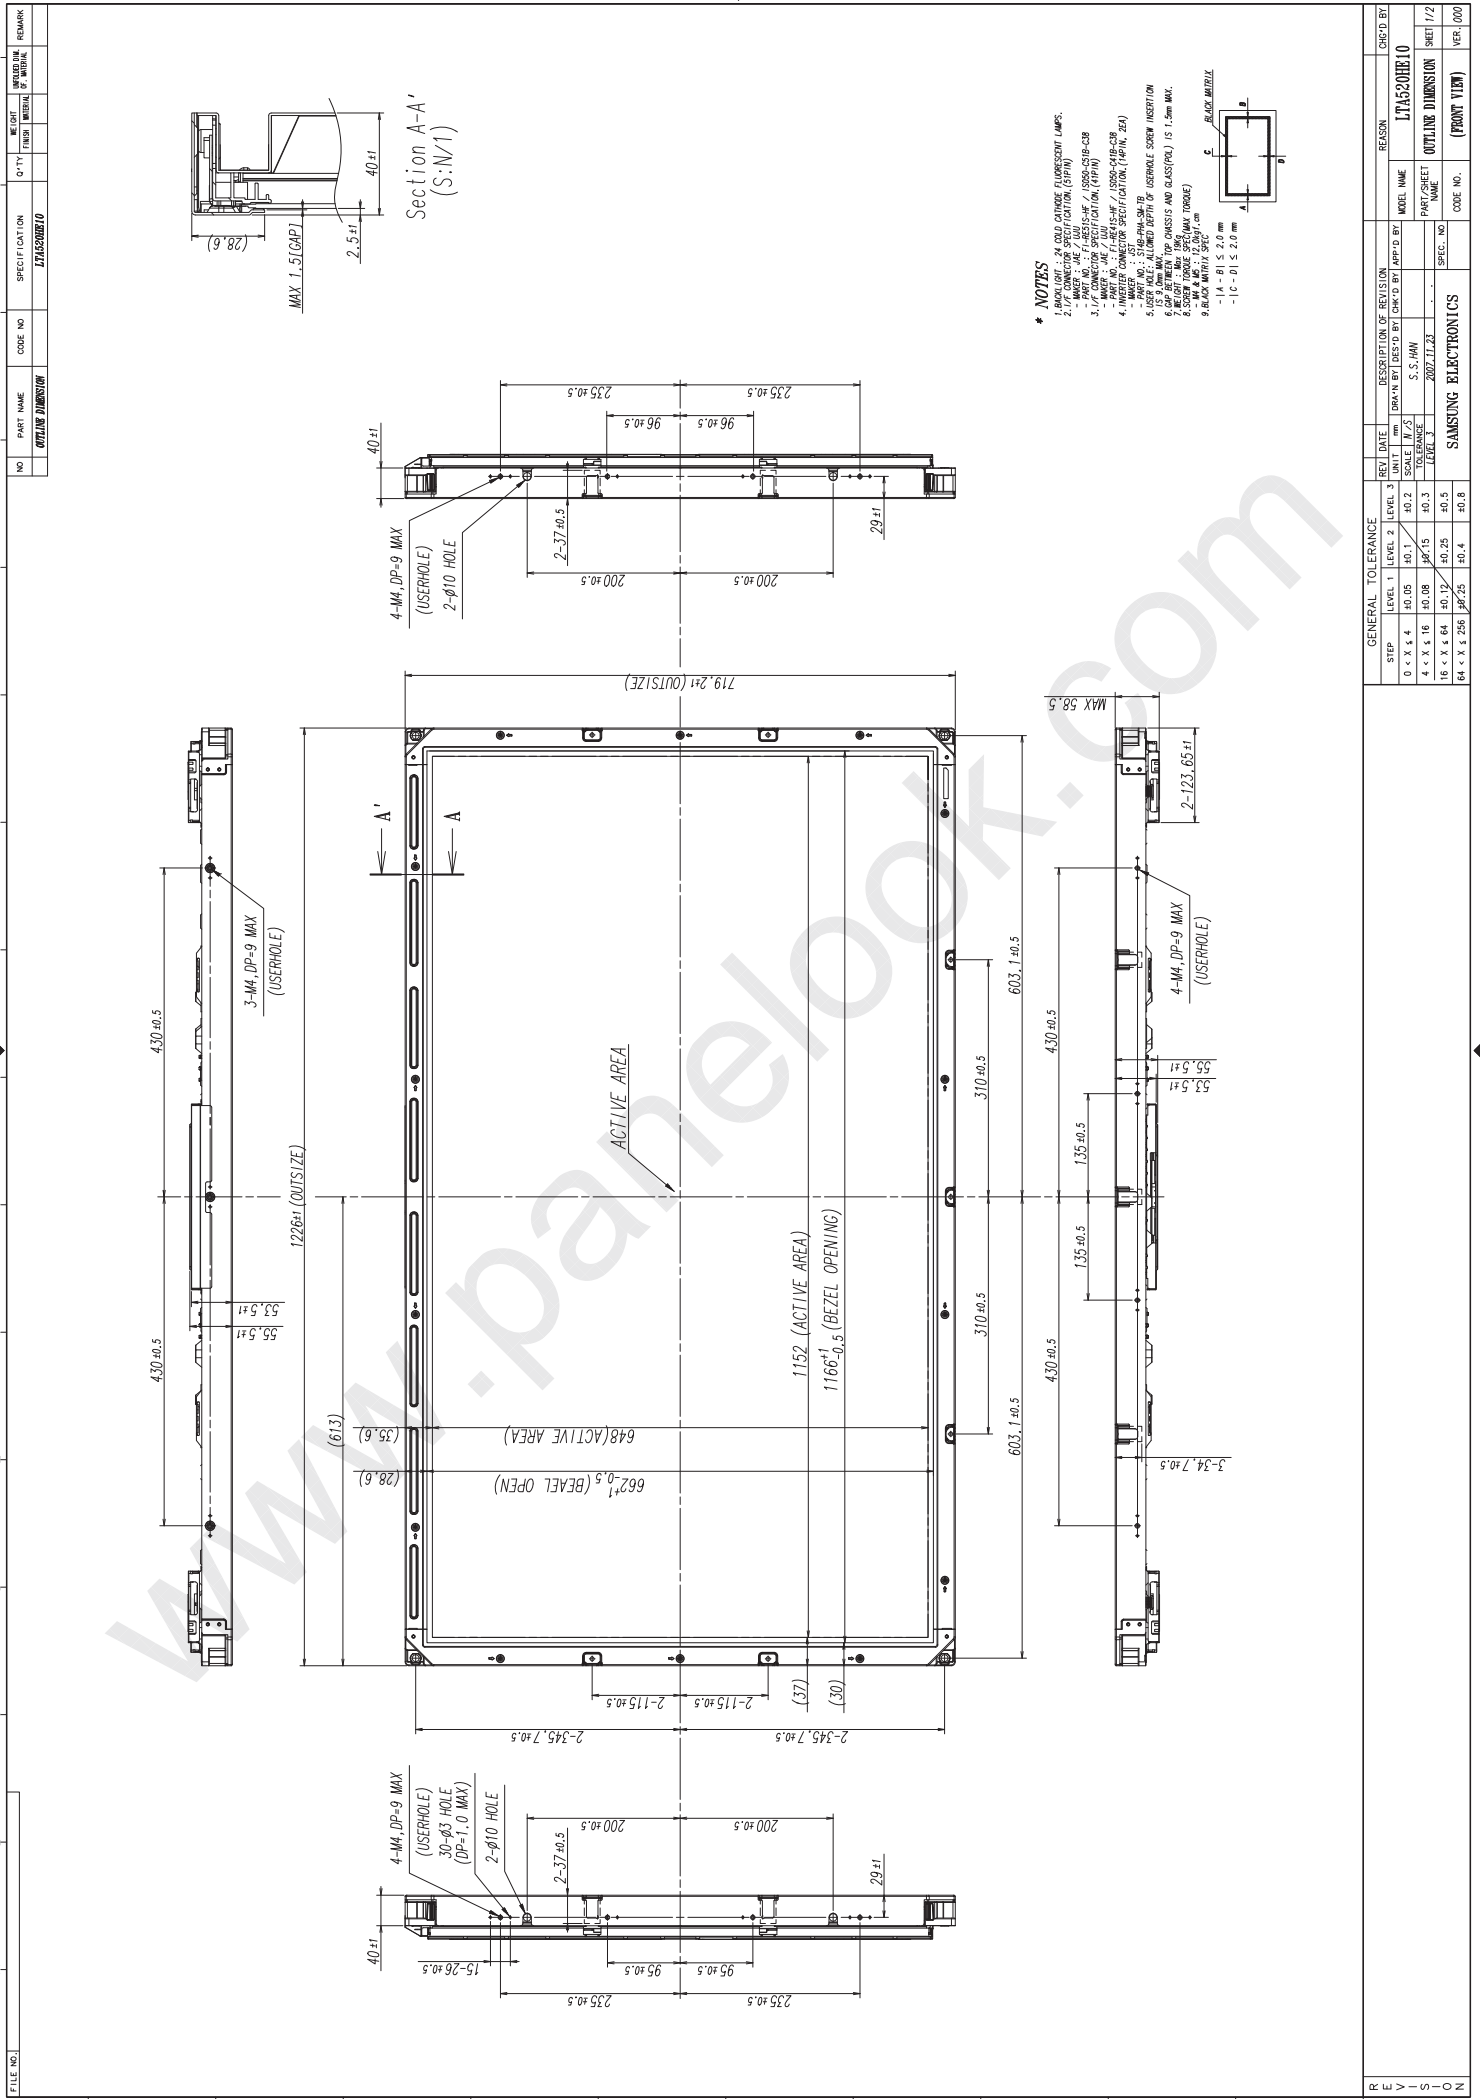


*** NOTES**

1. PANEL TYPE: STG-PM-CH-TP
2. I/F CONNECTOR SPECIFICATION: (SPTN)
3. I/F CONNECTOR SPECIFICATION: (SPTN)
4. I/F CONNECTOR SPECIFICATION: (SPTN)
5. I/F CONNECTOR SPECIFICATION: (SPTN)
6. I/F CONNECTOR SPECIFICATION: (SPTN)
7. I/F CONNECTOR SPECIFICATION: (SPTN)
8. I/F CONNECTOR SPECIFICATION: (SPTN)
9. I/F CONNECTOR SPECIFICATION: (SPTN)
10. I/F CONNECTOR SPECIFICATION: (SPTN)
11. I/F CONNECTOR SPECIFICATION: (SPTN)
12. I/F CONNECTOR SPECIFICATION: (SPTN)
13. I/F CONNECTOR SPECIFICATION: (SPTN)
14. I/F CONNECTOR SPECIFICATION: (SPTN)
15. I/F CONNECTOR SPECIFICATION: (SPTN)
16. I/F CONNECTOR SPECIFICATION: (SPTN)
17. I/F CONNECTOR SPECIFICATION: (SPTN)
18. I/F CONNECTOR SPECIFICATION: (SPTN)
19. I/F CONNECTOR SPECIFICATION: (SPTN)
20. I/F CONNECTOR SPECIFICATION: (SPTN)
21. I/F CONNECTOR SPECIFICATION: (SPTN)
22. I/F CONNECTOR SPECIFICATION: (SPTN)
23. I/F CONNECTOR SPECIFICATION: (SPTN)
24. I/F CONNECTOR SPECIFICATION: (SPTN)
25. I/F CONNECTOR SPECIFICATION: (SPTN)
26. I/F CONNECTOR SPECIFICATION: (SPTN)
27. I/F CONNECTOR SPECIFICATION: (SPTN)
28. I/F CONNECTOR SPECIFICATION: (SPTN)
29. I/F CONNECTOR SPECIFICATION: (SPTN)
30. I/F CONNECTOR SPECIFICATION: (SPTN)
31. I/F CONNECTOR SPECIFICATION: (SPTN)
32. I/F CONNECTOR SPECIFICATION: (SPTN)
33. I/F CONNECTOR SPECIFICATION: (SPTN)
34. I/F CONNECTOR SPECIFICATION: (SPTN)
35. I/F CONNECTOR SPECIFICATION: (SPTN)
36. I/F CONNECTOR SPECIFICATION: (SPTN)
37. I/F CONNECTOR SPECIFICATION: (SPTN)
38. I/F CONNECTOR SPECIFICATION: (SPTN)
39. I/F CONNECTOR SPECIFICATION: (SPTN)
40. I/F CONNECTOR SPECIFICATION: (SPTN)
41. I/F CONNECTOR SPECIFICATION: (SPTN)
42. I/F CONNECTOR SPECIFICATION: (SPTN)
43. I/F CONNECTOR SPECIFICATION: (SPTN)
44. I/F CONNECTOR SPECIFICATION: (SPTN)
45. I/F CONNECTOR SPECIFICATION: (SPTN)
46. I/F CONNECTOR SPECIFICATION: (SPTN)
47. I/F CONNECTOR SPECIFICATION: (SPTN)
48. I/F CONNECTOR SPECIFICATION: (SPTN)
49. I/F CONNECTOR SPECIFICATION: (SPTN)
50. I/F CONNECTOR SPECIFICATION: (SPTN)
51. I/F CONNECTOR SPECIFICATION: (SPTN)
52. I/F CONNECTOR SPECIFICATION: (SPTN)
53. I/F CONNECTOR SPECIFICATION: (SPTN)
54. I/F CONNECTOR SPECIFICATION: (SPTN)
55. I/F CONNECTOR SPECIFICATION: (SPTN)
56. I/F CONNECTOR SPECIFICATION: (SPTN)
57. I/F CONNECTOR SPECIFICATION: (SPTN)
58. I/F CONNECTOR SPECIFICATION: (SPTN)
59. I/F CONNECTOR SPECIFICATION: (SPTN)
60. I/F CONNECTOR SPECIFICATION: (SPTN)
61. I/F CONNECTOR SPECIFICATION: (SPTN)
62. I/F CONNECTOR SPECIFICATION: (SPTN)
63. I/F CONNECTOR SPECIFICATION: (SPTN)
64. I/F CONNECTOR SPECIFICATION: (SPTN)
65. I/F CONNECTOR SPECIFICATION: (SPTN)
66. I/F CONNECTOR SPECIFICATION: (SPTN)
67. I/F CONNECTOR SPECIFICATION: (SPTN)
68. I/F CONNECTOR SPECIFICATION: (SPTN)
69. I/F CONNECTOR SPECIFICATION: (SPTN)
70. I/F CONNECTOR SPECIFICATION: (SPTN)
71. I/F CONNECTOR SPECIFICATION: (SPTN)
72. I/F CONNECTOR SPECIFICATION: (SPTN)
73. I/F CONNECTOR SPECIFICATION: (SPTN)
74. I/F CONNECTOR SPECIFICATION: (SPTN)
75. I/F CONNECTOR SPECIFICATION: (SPTN)
76. I/F CONNECTOR SPECIFICATION: (SPTN)
77. I/F CONNECTOR SPECIFICATION: (SPTN)
78. I/F CONNECTOR SPECIFICATION: (SPTN)
79. I/F CONNECTOR SPECIFICATION: (SPTN)
80. I/F CONNECTOR SPECIFICATION: (SPTN)
81. I/F CONNECTOR SPECIFICATION: (SPTN)
82. I/F CONNECTOR SPECIFICATION: (SPTN)
83. I/F CONNECTOR SPECIFICATION: (SPTN)
84. I/F CONNECTOR SPECIFICATION: (SPTN)
85. I/F CONNECTOR SPECIFICATION: (SPTN)
86. I/F CONNECTOR SPECIFICATION: (SPTN)
87. I/F CONNECTOR SPECIFICATION: (SPTN)
88. I/F CONNECTOR SPECIFICATION: (SPTN)
89. I/F CONNECTOR SPECIFICATION: (SPTN)
90. I/F CONNECTOR SPECIFICATION: (SPTN)
91. I/F CONNECTOR SPECIFICATION: (SPTN)
92. I/F CONNECTOR SPECIFICATION: (SPTN)
93. I/F CONNECTOR SPECIFICATION: (SPTN)
94. I/F CONNECTOR SPECIFICATION: (SPTN)
95. I/F CONNECTOR SPECIFICATION: (SPTN)
96. I/F CONNECTOR SPECIFICATION: (SPTN)
97. I/F CONNECTOR SPECIFICATION: (SPTN)
98. I/F CONNECTOR SPECIFICATION: (SPTN)
99. I/F CONNECTOR SPECIFICATION: (SPTN)
100. I/F CONNECTOR SPECIFICATION: (SPTN)

GENERAL TOLERANCE		REV	DATE	DESCRIPTION OF REVISION	CHK'D BY
STEP	LEVEL 1	LEVEL 2	LEVEL 3	UNIT	mm
0 x x x 4	H/0.08	F/0.1	F/0.2	SCALE	1/25
4 x x x 16	H/0.15	F/0.15	F/0.3	APP'D BY	S.S.HAN
16 x x x 64	H/0.12	F/0.25	F/0.5	PAPER	
64 x x x 256	H/0.25	F/0.4	F/0.8	LEVEL	2002-11-23

NO.	REV.	DATE	DESCRIPTION	REASON
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				
61				
62				
63				
64				
65				
66				
67				
68				
69				
70				
71				
72				
73				
74				
75				
76				
77				
78				
79				
80				
81				
82				
83				
84				
85				
86				
87				
88				
89				
90				
91				
92				
93				
94				
95				
96				
97				
98				
99				
100				

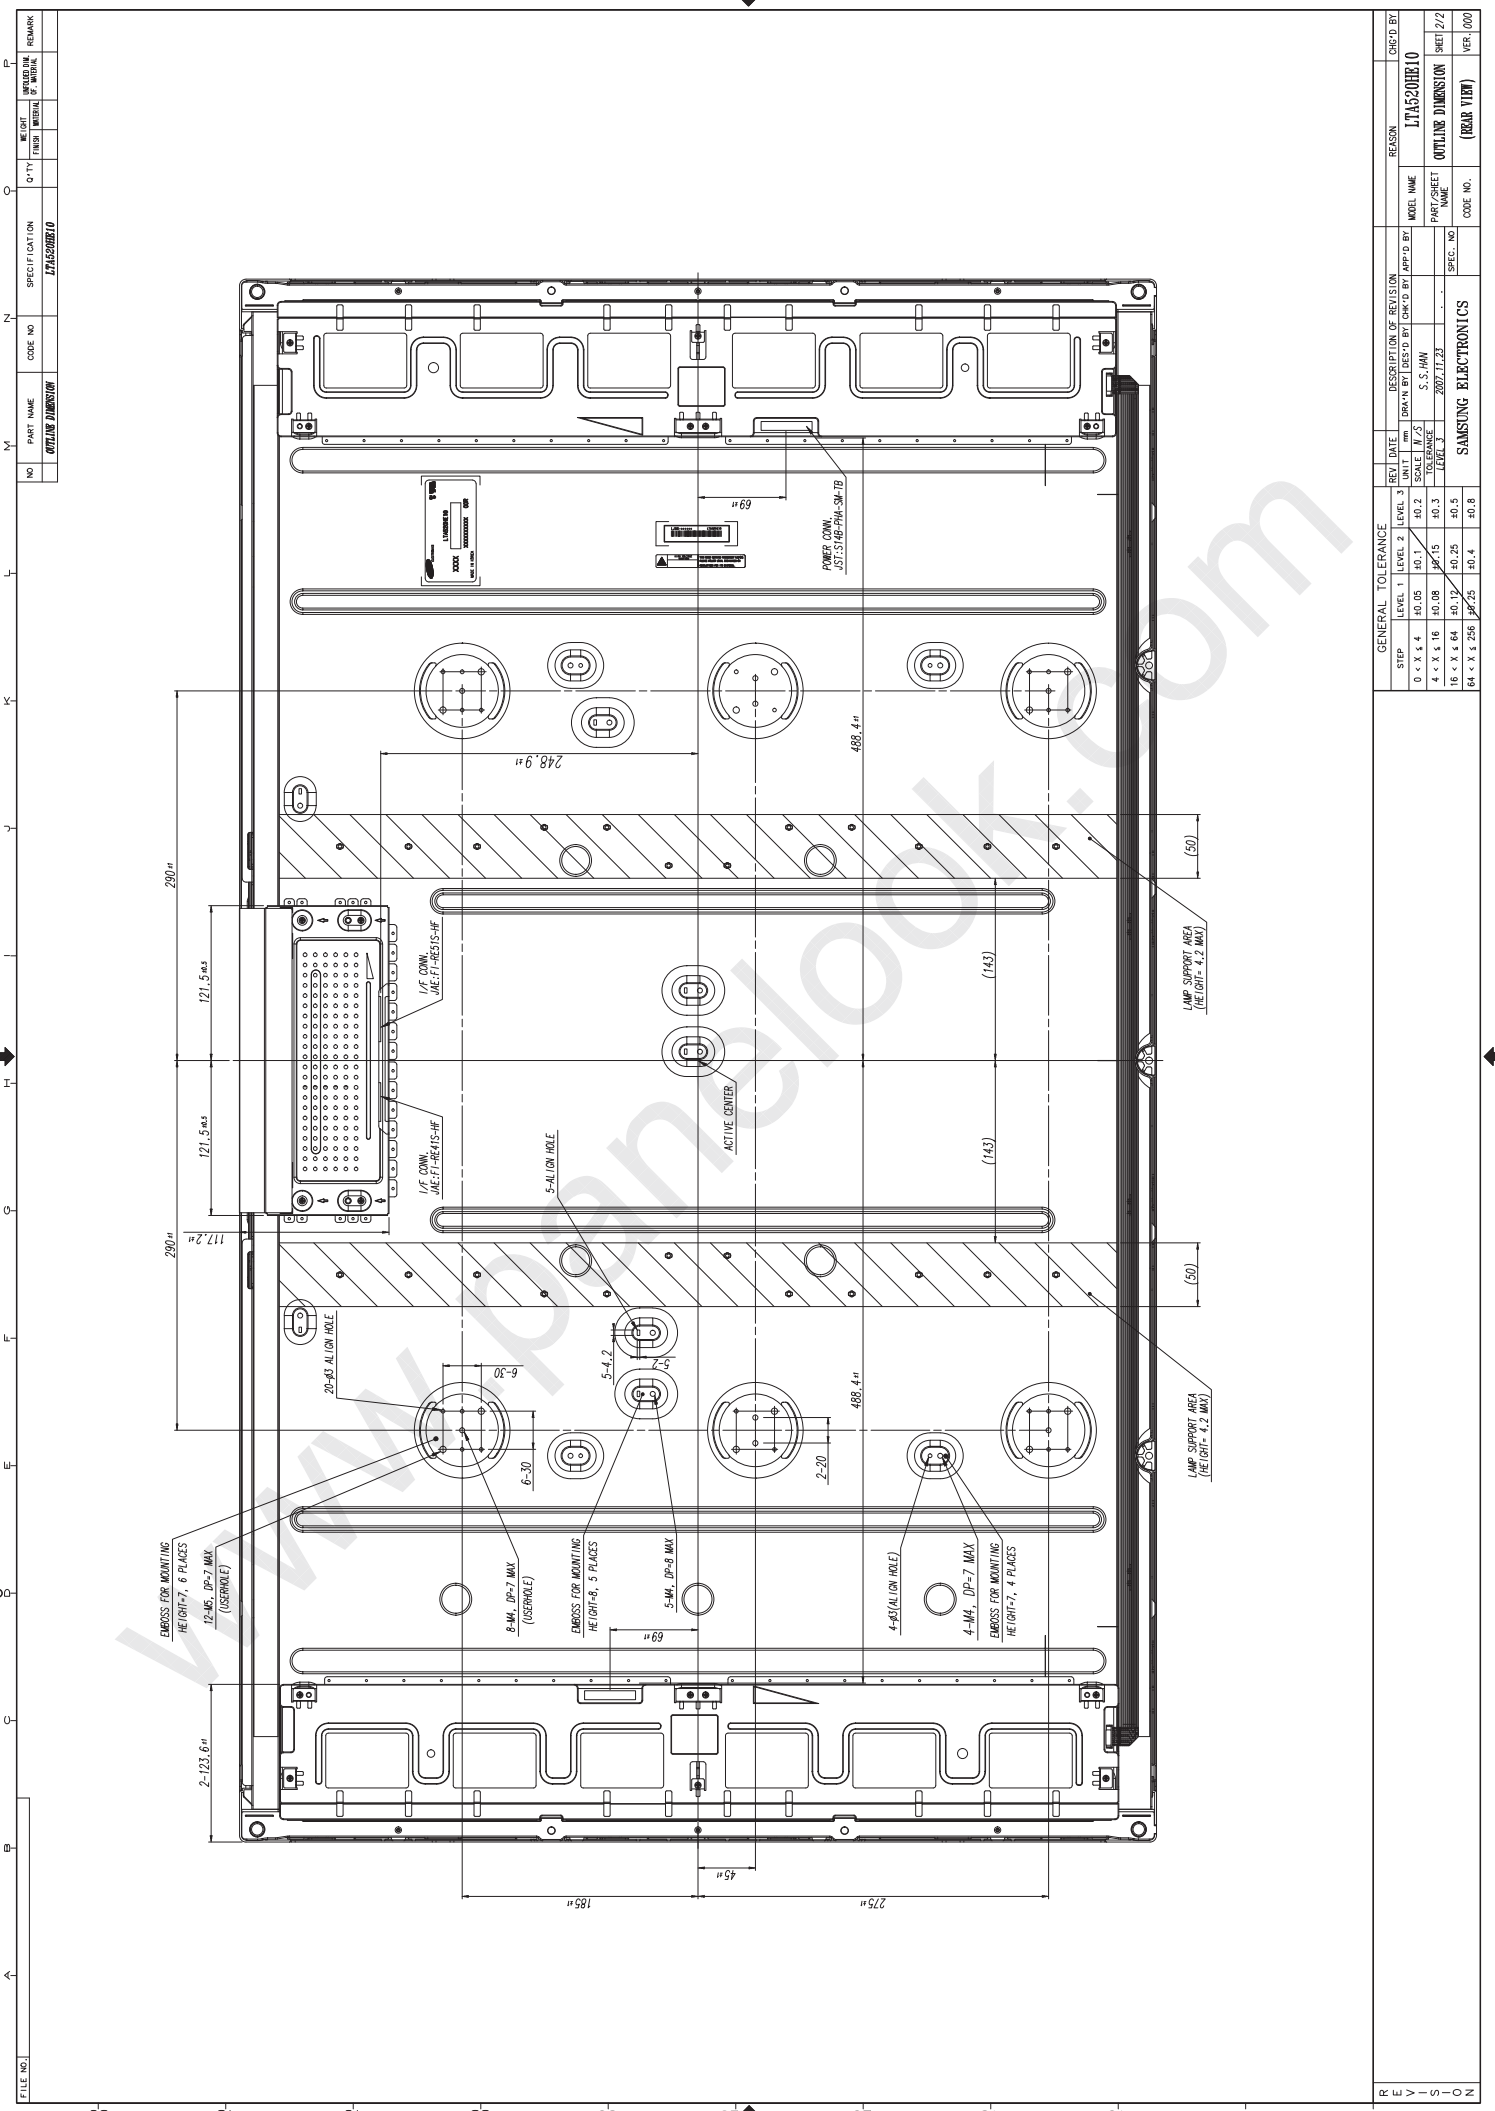

FILE NO.	NO.	PART NAME	CODE NO.	SPECIFICATION	Q'TY.	WEIGHT		REMARK
						INCH	MM	
		OUTLINE DIMENSION		J17A520B10				

GENERAL TOLERANCE				REV.	DATE	DESCRIPTION OF REVISION	REASON	CHK'D BY
STEP	LEVEL 1	LEVEL 2	LEVEL 3	UNIT	mm	DRWN BY	DES'D BY	APP'D BY
0 x x x 4	±0.2	±0.1	±0.2	SCALE	1/25	S.S./AM		
4 x x x 16	±0.08	±0.15	±0.3	PAPER				
16 x x x 64	±0.12	±0.25	±0.5	LEVEL	3	2000.11.23		
64 x x x 256	±0.25	±0.4	±0.8					

MODEL NAME	PAPER SHEET NAME	SPEC. NO.	CODE NO.
J17A520B10	OUTLINE DIMENSION		

SHEET	OUTLINE DIMENSION	VER.
2/2		000


7. PACKING

7.1 CARTON (Internal Package)

(1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

(2) Packing Method

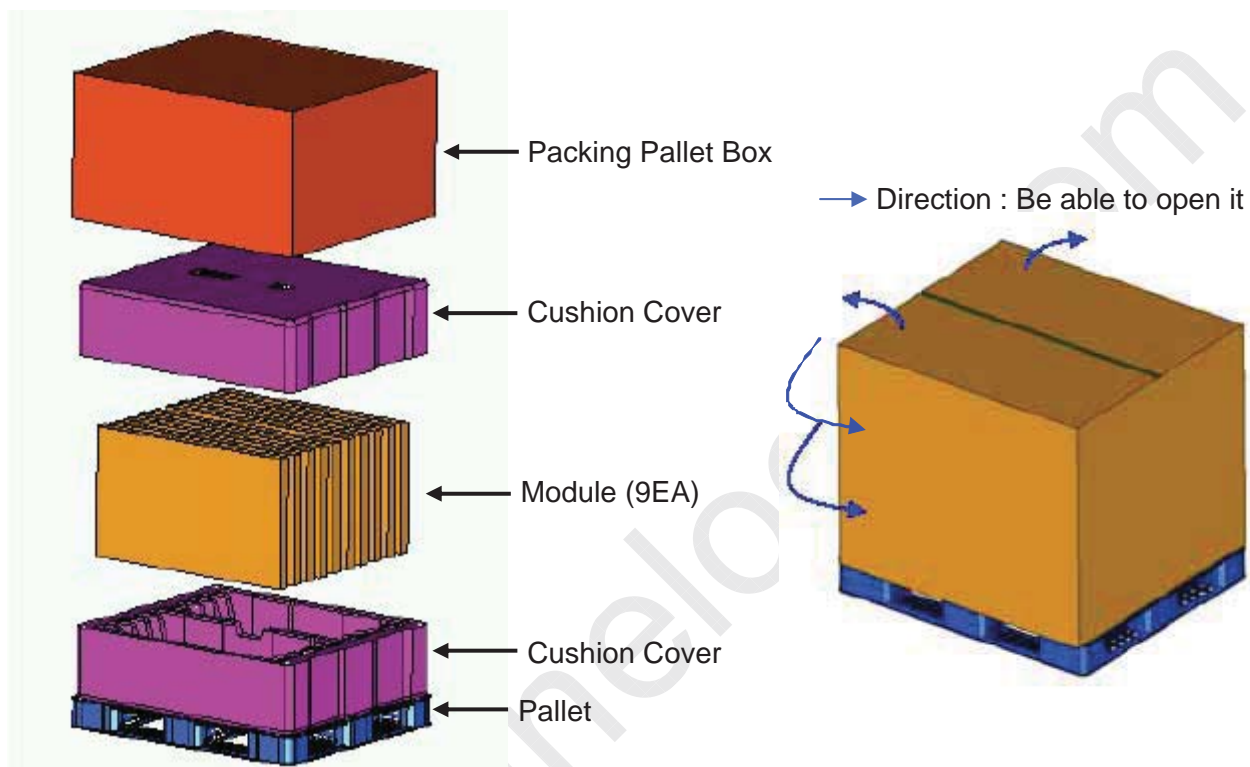

7.2 Packing Specification

Item	Specification	Remark
LCD Packing	9ea / (Packing-Pallet Box)	1. 171Kg / LCD (9ea) 2. 15.6 Kg / Cushion-pallet (2ea) 3. 10.5 Kg / Packing-Pallet Box (1ea) 4. Cushion-pallet Material : EPS 5. Packing-Pallet Box Material : DW4
Pallet	1Box / Pallet	1. Pallet weight = 10kg
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1475mm(H) x 1150mm(V) x 995mm(height)
Total Pallet Weight	207.1kg	Pallet(10kg) + Module(19*9=171) + Cushion(15.6kg) + Pallet-BOX(10.5kg)

MODEL

LTA520HE10-001

Doc. No

06-000-S-071127


Page

23 / 27


8. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


- (1) Parts number : LTA520HE10
- (2) Revision: Three letters
- (3) Lot number : X X X X XXX XX X

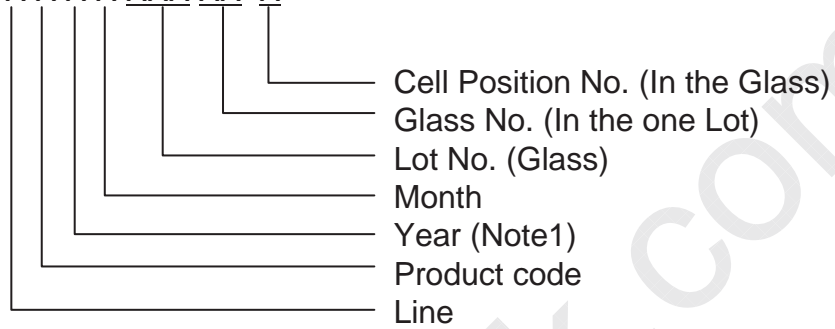

(4) Nameplate Indication

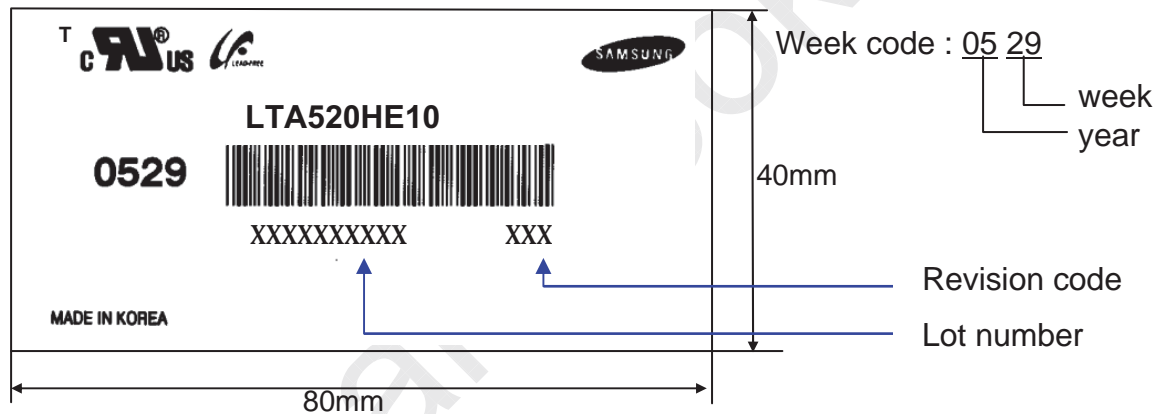

(5) Packing box attach

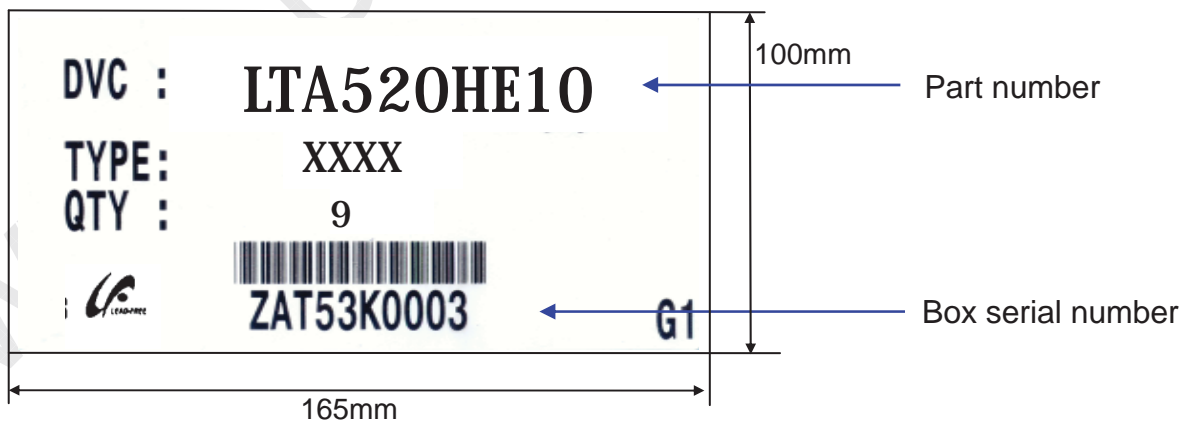

(6) Others

- 1. After service part
 Lamps cannot be replaced because of the narrow bezel structure.

MODEL	LTA520HE10-001	Doc. No	06-000-S-071127	Page	24 / 27
-------	----------------	---------	-----------------	------	---------

9. General Precautions

9.1 Handling

- (a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.
- (b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.
- (c) Refrain from strong mechanical shock and / or any force to the Module.
In addition to damage, this may cause improper operation or damage to the Module and CCFT back light.
- (d) Note that polarizers are very fragile and could be damage easily.
Do not press or scratch the surface harder than a HB pencil lead.
- (e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.
- (f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.
- (g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.
- (i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or semiconductor would be damaged.
- (j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (k) Do not disassemble the Module.
- (l) Do not disassemble shield case of inverter & LVDS board
- (m) Do not connect N.C pins. (Samsung internal use only)
- (n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handling a module
- (o) Pins of I/F connector should not be touched directly with bare hands.

MODEL

LTA520HE10-001

Doc. No

06-000-S-071127

Page

25 / 27

9.2 Storage

- (a) Do not leave the Module in high temperature, and high humidity for a long time. It is highly recommended to store the Module with temperature from 0 to 35°C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD Module in direct sunlight.
- (c) The Module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storing.

9.3 Operation

- (a) Do not connect or disconnect the Module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the "Power on/off sequence"
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the back light connector and its inverter power supply should be connected directly with a minimized length. A longer cable between the back light and the inverter may cause lower luminance of lamp(CCFT) and may require higher startup voltage(Vs).

9.4 Operation Condition Guide

- (a) The LCD product should be operated under normal conditions.
Normal condition is defined as below;
 - Temperature : $20 \pm 15^{\circ}\text{C}$
 - Humidity : $55 \pm 20\%$
 - Display pattern : continually changing pattern (Not stationary)
- (b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

MODEL

LTA520HE10-001

Doc. No

06-000-S-071127

Page

26 / 27

9.5 Others

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the Module may be damaged.
- (d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.
To avoid image sticking, it is recommended to use a screen saver.
- (e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.
- (f) Please contact SEC in advance when you display the same pattern for a long time.

MODEL

LTA520HE10-001

Doc. No

06-000-S-071127

Page

27 / 27