



DATE : Mar. 09. 2012

SAMSUNG TFT-LCD

MODEL : LTI216XM01

The Information Described in this Specification is Preliminary and can be changed without prior notice

APPROVED BY <i>Heo Jeongmin</i>	DATE Mar. 09.2012	PREPARED BY <i>ChangHee Hong</i>	DATE Mar. 09.2012
------------------------------------	----------------------	-------------------------------------	----------------------

Samsung Electronics Co . , LTD.

Revision History	(3)
General Description	(4)
General Information	(4)
1. Absolute Maximum Ratings	(5)
2. Application information for DID (Digital Information Display)	(7)
3. Optical Characteristics	(8)
4. Electrical Characteristics	(11)
4.1 TFT LCD Module	
4.2 Back Light Unit	
4.3 Inverter Input & Specification	
5. Input Terminal Pin Assignment	(14)
5.1 LVDS Connector	
5.2 Inverter Input Pin Configuration	
5.3 Inverter Input Power Sequence	
5.4 LVDS Interface	
5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color	
6. Interface Timing	(19)
6.1 Timing Parameters (DE mode)	
6.2 Timing Diagrams of interface Signal (DE mode)	
6.3 Power ON/OFF Sequence	
7. Outline Dimension	(22)
8. Packing	(24)
9. Marking & Others	(26)
10. General Precaution	(27)
10.1 Handling	
10.2 Storage	
10.3 Operation	
10.4 Operation Condition Guide	
10.5 Others	

*** Revision History**

Date	Rev. No	Page	Summary
Feb. 07. 2012	000	all	First issued
Mar. 09. 2012	001	4	General Information - Weight updated - Pixel pitch 0.4035 X 0.4035
		8	Optical Charac teristics - CR, Response time, color chromaticity items updated
		11	Electrical Characteristics - Power Consumption, Rush Current items updated
		12	Power sequence image : newly updated
		24	Packing Specification - Module Weight updated
		26	Marking & Others - (5) Packing box attach : 30ea → 36ea

Description

LTI216XM01 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT(Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a backlight unit. The resolution of a 21.6" is 960 x 960 and this model can display up to 16.7M colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV, Display terminals for AV application products, and Digital Information Display (DID).

Features

- RoHS compliance (Pb-free)
- High contrast ratio, High luminance
- SVA(Super Vertical Align) mode
- Wide viewing angle ($\pm 178^\circ$)
- 960 x 960 pixels) resolution (1:1)
- Low power consumption
- Direct LED Backlight
- DE(Data Enable) mode
- 1Ch LVDS (Low Voltage Differential Signaling) interface
- Super Narrow Bezel

General Information

Items	Specification	Unit	Note
Module Size	393.26(W _{TYP}) x 393.26(H _{TYP})	mm	±1.0mm
	55(D _{MAX})		
Weight	4200 (Max)	g	
Pixel Pitch	0.4035(H) x 0.4035(V)	mm	
Active Display Area	387.36(H) x 387.36(V)	mm	
Surface Treatment	Haze 44% , Anti-Glare		
Display Colors	8 bit - 16.7M	colors	
Number of Pixels	960 X 960	pixel	1 : 1
Pixel Arrangement	RGB vertical stripe		
Display Mode	Normally Black		
Luminance of White	450 (Typ.)	cd/m ²	

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.


1.1 Environmental absolute Maximum Ratings

Item		Symbol	Min.	Max.	Unit	Note
Power Supply Voltage		V_{DD}	GND-0.5	13.2	V	(1)
Storage temperature		T_{STG}	-20	65	°C	(2)
Glass surface temperature (Operation)	Center	T_{CENTER}	0	50	°C	(2),(3)
	T. Uniformity	ΔT	-	10	°C	

1.2 LED Unit absolute Maximum Ratings

Item	Symbol	Max.	Unit	Note
Operating Temperature Range	Top	TBD	°C	-
Storage Temperature Range	TSTG	TBD	°C	-
Junction Temperature	Tj	TBD	°C	-
Forward Current	If	TBD	mA	@LED Module (208 LEDs)
	Ifp	TBD	mA	
Forward Voltage	Vf	TBD	V	@LED Module (208LEDs)
Thermal Resistance, Junction to PCB	Rth,JS	TBD	K/W	Junction to solder

- Note (1) $T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$
- (2) Temperature and relative humidity range are shown in the figure below.
- a. 90 % RH Max. ($T_a \leq 39 \text{ }^{\circ}\text{C}$)
 - b. Relative Humidity is 90% or less. ($T_a > 39 \text{ }^{\circ}\text{C}$)
 - c. No condensation

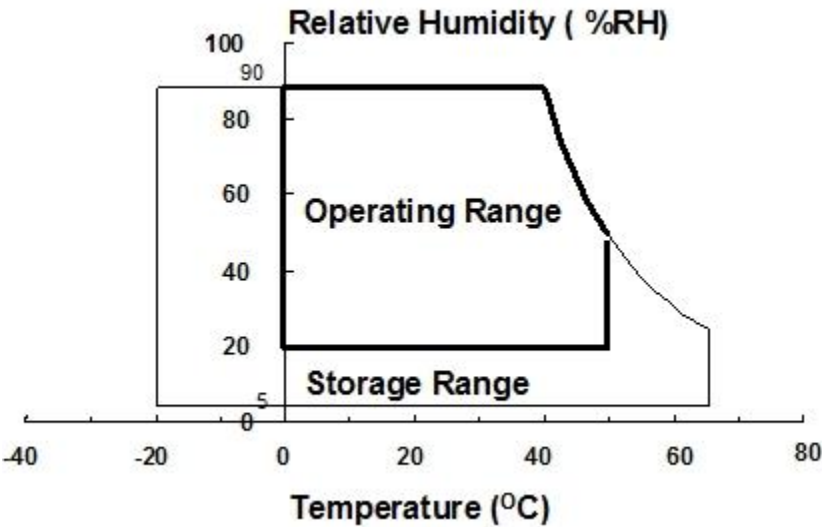

2. Application information for DID (Digital Information Display)

A long-term display like DID application may cause uneven display including image retention. To optimize module's lifetime and function, several operating usages are required.

1. Normal operating condition

- Temperature: $20 \pm 15^{\circ}\text{C}$
- Humidity: $55 \pm 20\%$
- Display pattern: moving picture or regular switchover display

Note) Long-term static information image may cause uneven display.

2. Operating usages under abnormal operating condition. Note (1)

- a. Ambient condition
 - Well-ventilated place is recommended to set up DID system.
- b. Power off and screen saver
 - Periodical power-off or screen saver is needed after long-term static display. Note (2)

3. Operating usages to protect uneven display due to long-term static information display

- a. Suitable operating time for E-DID : under TBD hours a day.
- b. Periodical display contents change from static image to moving picture.
 - Liquid crystal refresh time is required.
- c. Periodical background color and character (image) color change
 - Use different colors for background and character (image), respectively.
 - Change colors periodically.
- d. Avoid combination of background and character with large different luminance.

Note (1) Abnormal condition means every operating condition except normal operating condition.

Note (2) Moving picture or black pattern is strongly recommended for screen saver.

4. Lifetime in this spec is guaranteed only when DID is used under right operating usages.

3. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.

Measuring equipment : TOPCON BM-7, BM-5A, SR-3, EZ-Contrast


(Ta = 25 ± 2°C, V_{DD} = 12V, f_v = 60Hz, f_{DCLK} = 148.5 MHz)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R	Normal $\theta_{L,R}=0$ $\theta_{U,D}=0$ Viewing Angle	3000	4000	-		(3) SR-3
Response Time	G-to-G	Tg		-	8	TBD	msec	(5) RD80s
Luminance of White (Center of screen)		Y _L		TBD	450	-	cd/m ²	(6) SR-3
Color Chromaticity (CIE 1931)	Red	Rx		TYP. -0.03	0.650	TYP. +0.03		(7),(8) SR-3
		Ry			0.330			
	Green	Gx			0.315			
		Gy			0.620			
	Blue	Bx			0.155			
		By			0.053			
	White	Wx			0.280			
		Wy	0.290					
Color Gamut		-		67	72	-	%	(7) SR-3
Color Temperature		-		8000	10000	-	K	(7) SR-3
Viewing Angle	Hor.	θ_L	C/R≥10	75	89	-	Degree	(8) EZ
		θ_R		75	89	-		
	Ver.	θ_U		75	89	-		
		θ_D		75	89	-		
Brightness Uniformity (9 Points)		B _{uni}		-	-	25	%	(4) BM-5A


Note (1) Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the backlight at the given temperature for stabilization of the backlight. This should be measured in the center of screen.

Environment condition : Ta = 25 ± 2 °C

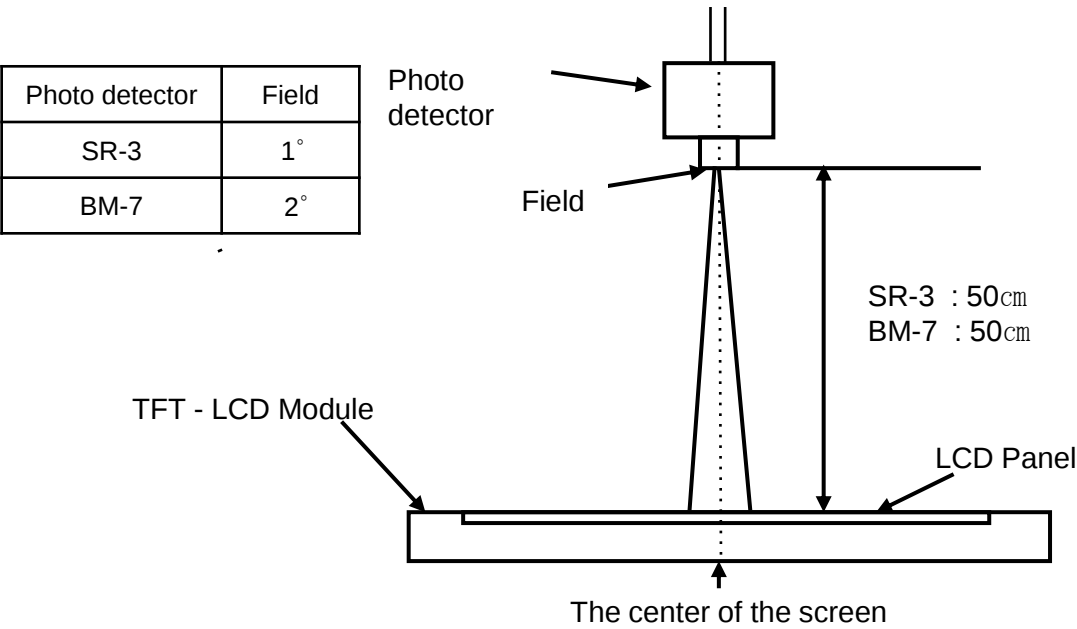

Note (2) Definition of test point

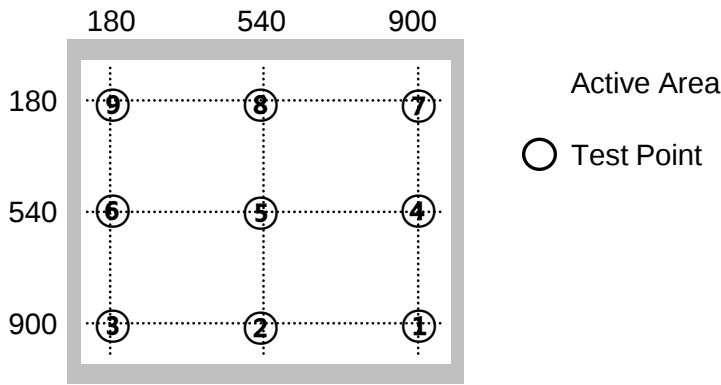

Note (3) Definition of Contrast Ratio (C/R)

: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C / R = \frac{G \max}{G \min}$$

Gmax : Luminance with all pixels white

Gmin : Luminance with all pixels black


Note (4) Definition of 9 points brightness uniformity

$$Buni = 100 * \frac{(B \max - B \min)}{B \max}$$

Bmax : Maximum brightness

Bmin : Minimum brightness

Note (5) Definition of Response time : Average response time of all Gray to Gray

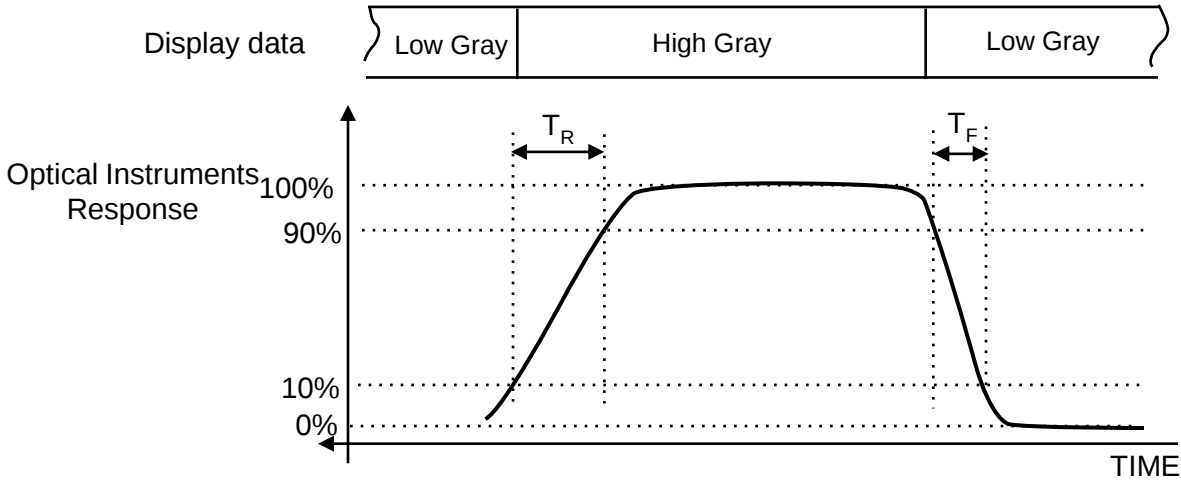


Note (6) Definition of Luminance of White : Luminance of white at center point ⑤

Note (7) Definition of Color Chromaticity (CIE 1931)

Color coordinate of Red, Green, Blue & White at center point ⑤

Note (8) Definition of Viewing Angle

: Viewing angle range ($C/R \geq 10$)

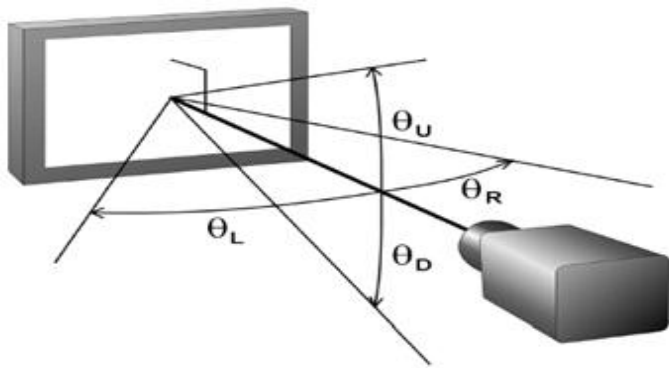

4. Electrical Characteristics

4.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$T_a = 25^\circ\text{C} \pm 2^\circ\text{C}$


Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V_{DD}	10.8	12.0	13.2	V	(1)
Power Consumption	(a) Black	I_{DD}	-	310	370	mA	(2),(3)
	(b) White		-	460	520	mA	
	(c) N-pattern		-	430	500	mA	
Vsync Frequency		f_V	-	60	-	Hz	
Hsync Frequency		f_H	-	67.5	-	kHz	
Main Frequency		f_{DCLK}	-	74.25	-	MHz	
Rush Current		I_{RUSH}	-	-	1.65	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD} .

(2) $f_V = 60\text{Hz}$, $f_{DCLK} = 148.5\text{ MHz}$, $V_{DD} = 12.0\text{V}$, DC Current.

(3) Power dissipation check pattern (LCD Module only)



a) Black Pattern




b) White Pattern



c) N - Pattern



(4) Measurement Conditions

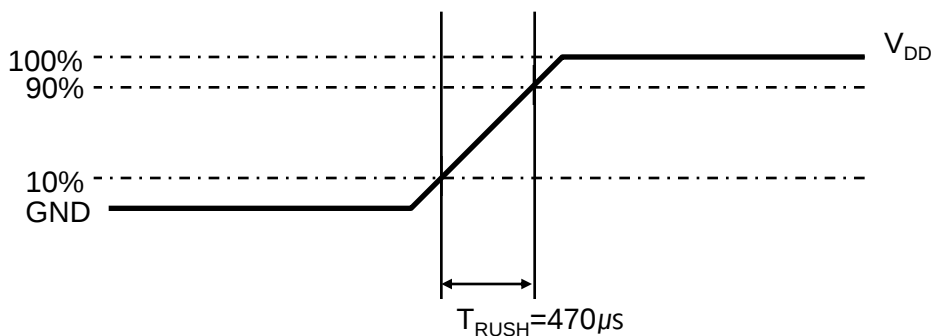

Rush Current I_{RUSH} can be measured when T_{RUSH} is $470\mu\text{s}$.


4.2 Back Light Unit

The backlight unit contains TBD LEDs.

Ta=25 ± 2℃

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	(50,000)	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.
[Operating condition : Ta = 25±2℃]

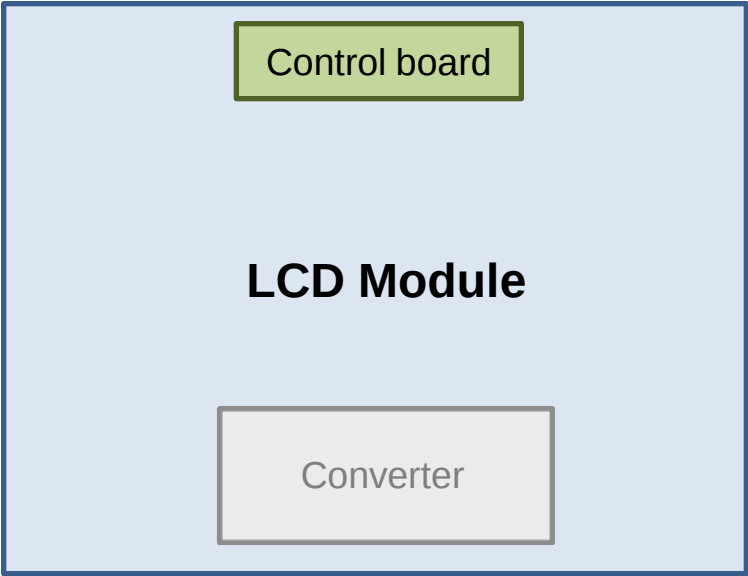

4.3 LED Drive DC-DC Converter

Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	V _{in}	-	22	24	26	V	Ta=25±2 °C
Input Current	I _{in}	V _{in} = 24.0V dim =Max	-	-	2.5	Adc	Initial turn on
Output Current	I _{LED}	V _{in} = 24.0V dim =Max	57	60	63	mArms	After 1 hour Warm-up @ 1 string
Operating frequency	f _{op}	V _{in} =22.0~26.0V dim=max	TBD	TBD	TBD	kHz	
Backlight On/Off	ON	V _{in} = 24.0V	3	-	5.25	V	
	OFF	V _{in} = 24.0V	0	-	0.4	V	
Dimming control	V _{dim}	Max	0	-		V	
		Min		-	3.3		

Note (1) Power Consumption is measured at 450[cd/m²] of luminance condition which is the typical luminance value. Lamp Current is measured at the point before Lamp.

※ Additional Appendix for supply current

Items	Symbol	Conditions	Specifications			Unit
			Min.	Typ.	Max.	
Input Current	I _{IN_overshoot}	V _{IN} =24V, DIM=3.3V (Within 1hr at BLU ON)	-	TBD	TBD	Adc
	I _{IN_saturation}	V _{IN} =24V, DIM=3.3V (After 1hr Aging)	-	TBD	TBD	

5. Input Terminal Pin Assignment

5.1 Input Signal & Power

Connector : FI-RE51S-HF (JAE)

PIN No.	Description		PIN No.	Description
1	Vdd (12V)		26	No Connection (1)
2	Vdd (12V)		27	No Connection (1)
3	Vdd (12V)		28	No Connection (1)
4	Vdd (12V)		29	No Connection (1)
5	Vdd (12V)		30	No Connection (1)
6	No Connection(1)		31	GND
7	GND		32	No Connection (1)
8	GND		33	No Connection (1)
9	GND		34	GND
10	LVDS Signal	R[0]N	35	No Connection (1)
11		R[0]P	36	No Connection (1)
12		R[1]N	37	No Connection(1)
13		R[1]P	38	No Connection(1)
14		R[2]N	39	GND
15		R[2]P	40	No Connection (1)
16		GND	41	No Connection(1)
17		RCLK-	42	No Connection (1)
18		RCLK+	43	No Connection(1)
19		GND	44	No Connection (1)
20		R[3]N	45	LVDS_SEL (2)
21		R[3]P	46	No Connection(1)
22		No Connection(1)	47	No Connection(1)
23		No Connection(1)	48	No Connection(1)
24	GND		49	No Connection (1)
25	No Connection (1)		50	No Connection(1)
			51	No Connection (1)

Note 1) No Connection : These pins are only used for SAMSUNG internal purpose.

Note 2) LVDS OPTION : IF THIS PIN : HIGH (3.3 V) → NORMAL NS LVDS FORMAT

OTHERWISE : LOW (GND) OR OPEN(NC) → JEIDA LVDS FORMAT

Sequence : On = $V_{DD}(T1) \geq \text{LVDS Option} \geq \text{Interface Signal}(T2)$

OFF = $\text{Interface Signal}(T3) \geq \text{LVDS Option} \geq V_{DD}$

Note (3) LVDS Connector

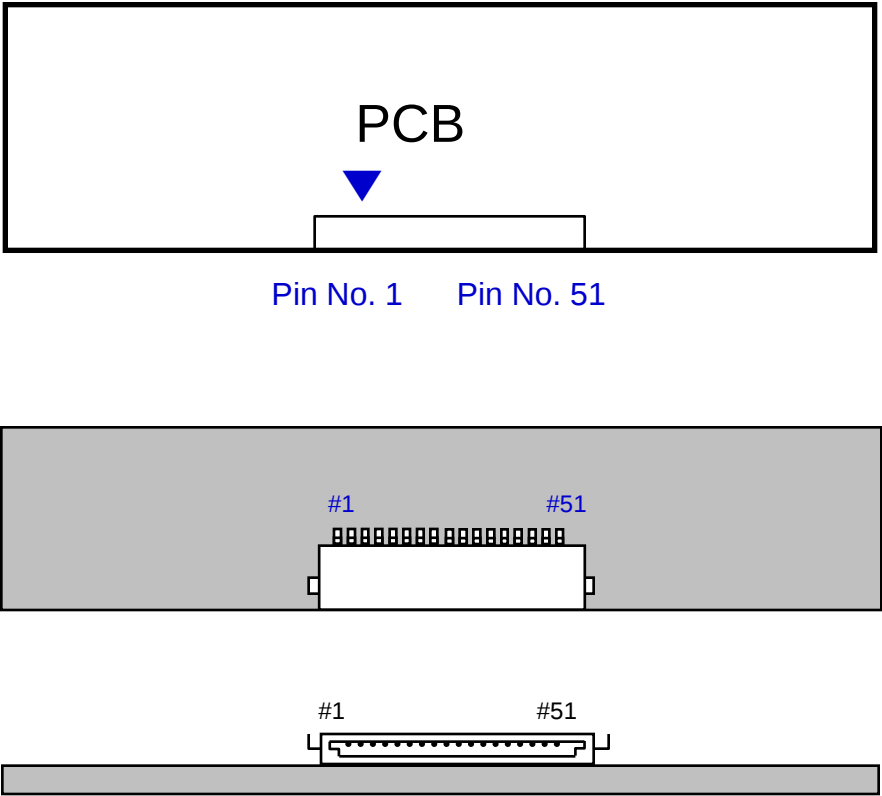


Fig. Connector diagram

- a. All GND pins should be connected together and also be connected to the LCD's metal chassis.
- b. All power input pins should be connected together.
- c. All N.C pins should be separated from other signal or power.


5.2 LED Converter input & output Pin Configuration

22022WR-014B1 (YEONHO)

Pin No.	Pin Configuration(FUNCTION)
1	V _{in} (24V)
2	V _{in} (24V)
3	V _{in} (24V)
4	V _{in} (24V)
5	V _{in} (24V)
6	GND
7	GND
8	GND
9	GND
10	GND
11	No connection
12	ENA (Converter on/off Control signal) DC 0 to 0.8V off, DC 2.4 to 5.25V On
13	Internal Dimming control [0V: Min, 3.3V: Max]
14	No connection

Note) Dimming → Pin 13 : DC Voltage, Pin 14 :Open

5.3 LED drive DC-DC converter Power Sequence

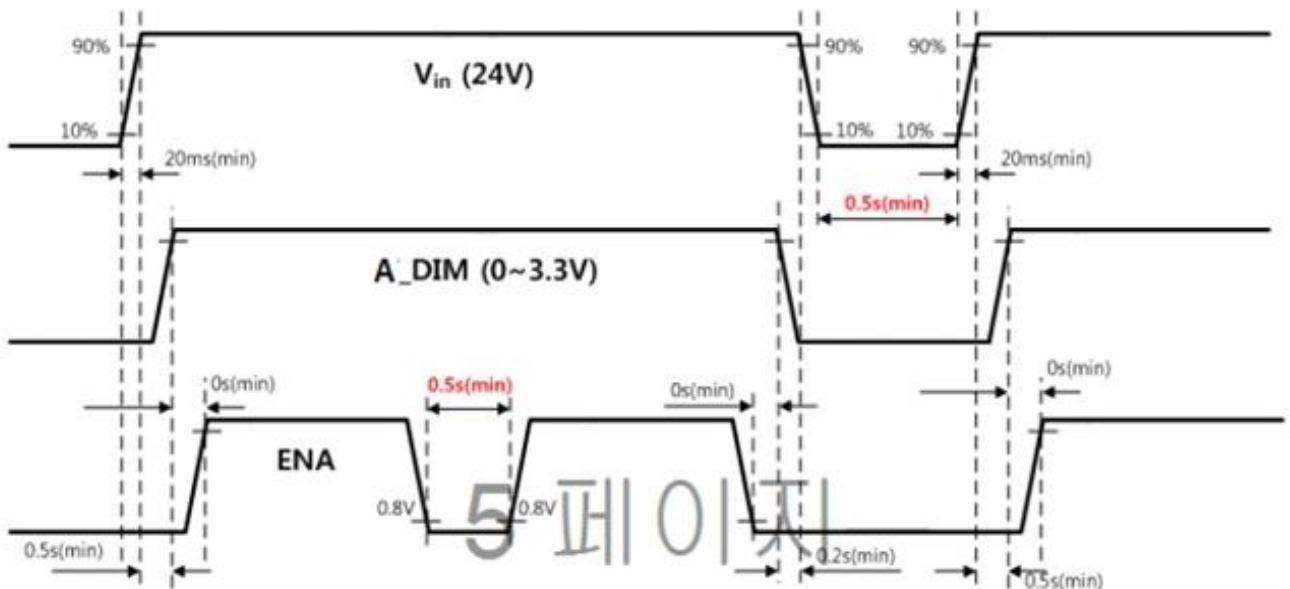

5.4 LVDS Interface

- LVDS Receiver : Tcon (merged)
- Data Format (JEIDA)

Default LVDS Option : JEIDA

	LVDS pin	JEIDA -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R4
	TxIN/RxOUT1	R5
	TxIN/RxOUT2	R6
	TxIN/RxOUT3	R7
	TxIN/RxOUT4	R8
	TxIN/RxOUT6	R9
	TxIN/RxOUT7	G4
TxOUT/RxIN1	TxIN/RxOUT8	G5
	TxIN/RxOUT9	G6
	TxIN/RxOUT12	G7
	TxIN/RxOUT13	G8
	TxIN/RxOUT14	G9
	TxIN/RxOUT15	B4
	TxIN/RxOUT18	B5
TxOUT/RxIN2	TxIN/RxOUT19	B6
	TxIN/RxOUT20	B7
	TxIN/RxOUT21	B8
	TxIN/RxOUT22	B9
	TxIN/RxOUT24	HSYNC
	TxIN/RxOUT25	VSYNC
	TxIN/RxOUT26	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R2
	TxIN/RxOUT5	R3
	TxIN/RxOUT10	G2
	TxIN/RxOUT11	G3
	TxIN/RxOUT16	B2
	TxIN/RxOUT17	B3
	TxIN/RxOUT23	RESERVED
TxOUT/RxIN4	TxIN/RxOUT28	R0
	TxIN/RxOUT29	R1
	TxIN/RxOUT30	G0
	TxIN/RxOUT31	G1
	TxIN/RxOUT32	B0
	TxIN/RxOUT33	B1
	TxIN/RxOUT34	RESERVED

5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																												GRAY SCALE LEVEL
		RED								GREEN								BLUE												
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7					
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-		
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-			
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-			
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-			
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-			
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-			
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-			
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-			
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0			
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1			
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2			
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~ R252			
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:				
	↓ LIGHT	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R253		
		0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R254		
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R255		
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0			
	DARK ↑	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1		
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~ G252			
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:				
	↓ LIGHT	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G253		
		0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G254		
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G255		
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0			
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	B1		
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	B2		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~ B252			
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:				
	↓ LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	B253		
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	B254		
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	B255		

Note) Definition of Gray :

Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)

Input Signal : 0 = Low level voltage, 1 = High level voltage

6. Interface Timing


6.1 Timing Parameters (DE mode)

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Clock	Frequency	$1/T_C$	-	74.25	-	MHz	2Pix/clock
Hsync		F_H	-	67.5	-	KHz	-
Vsync		F_V	-	60	-	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	960	-	Lines	-
	Vertical Total	T_V	TBD	1125	TBD	Lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	960	-	Clocks	-
	Horizontal Total	T_H	TBD	1100	TBD	Clocks	-

Note) This product is DE mode. And, the input of Hsync & Vsync signal does not have an effect on normal operation.


Test Point : TTL control signal and CLK at LVDS Tx input terminal in system

6.2 Timing diagrams of interface signal (DE mode)

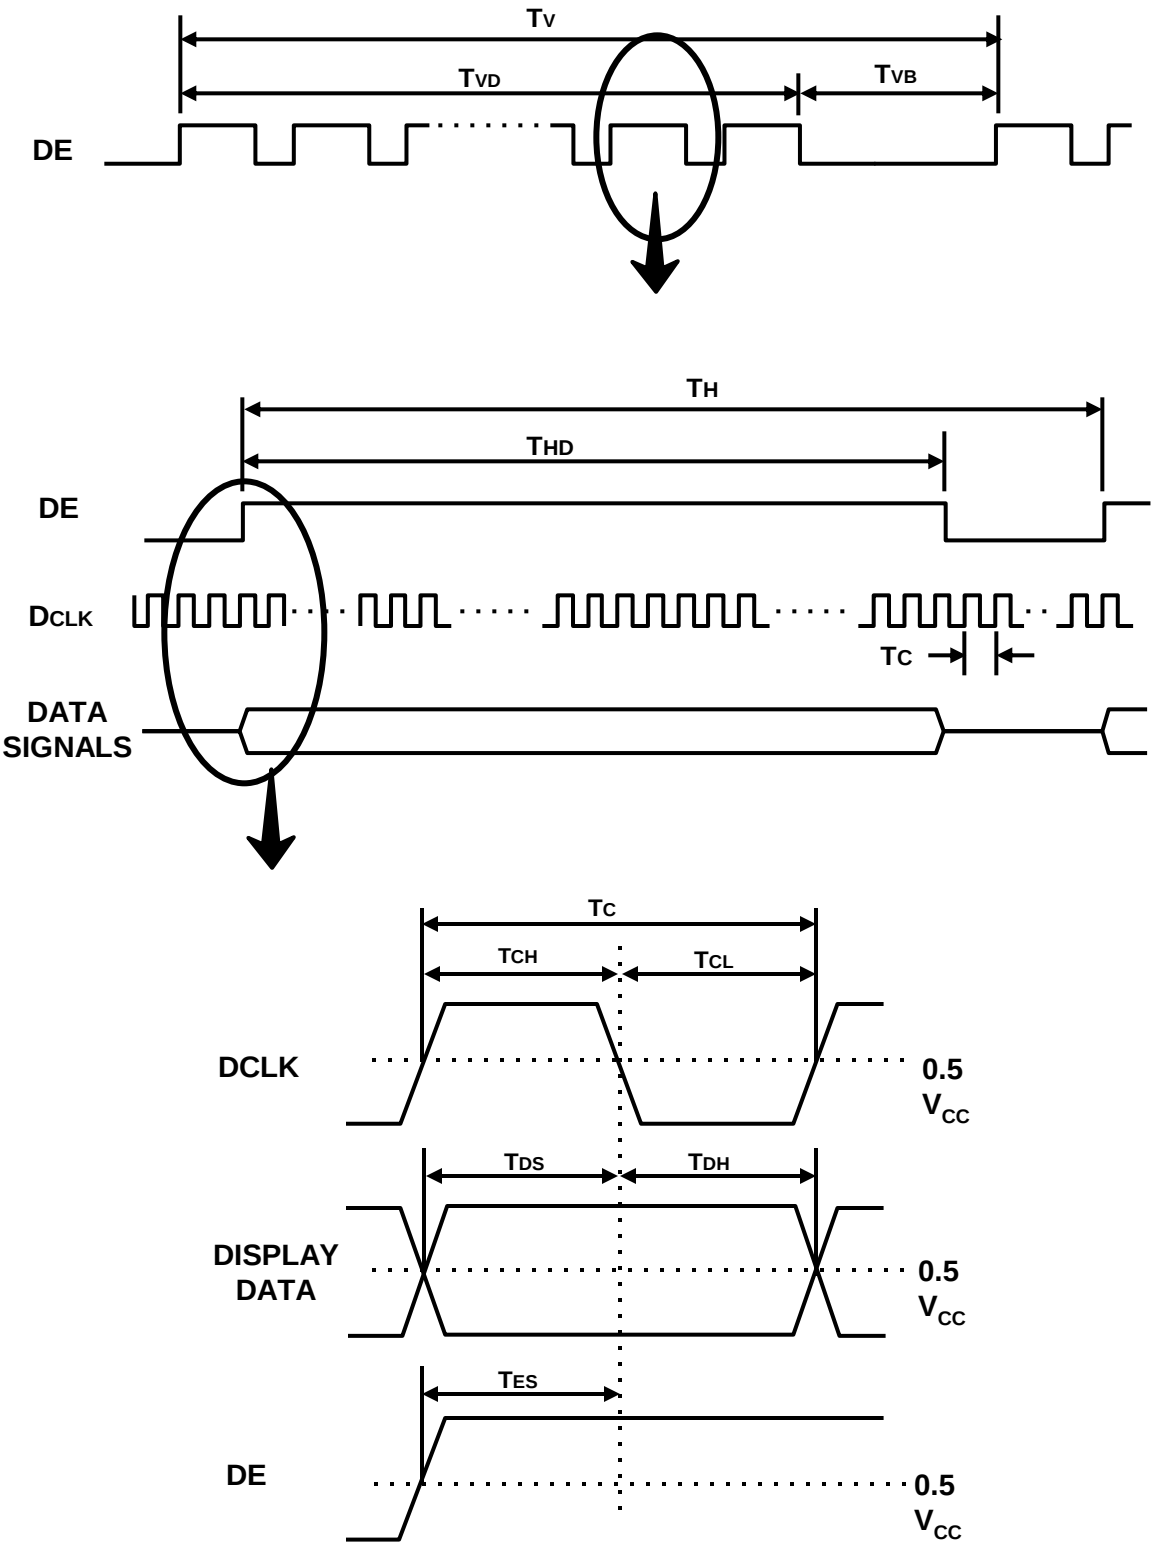

6.3 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

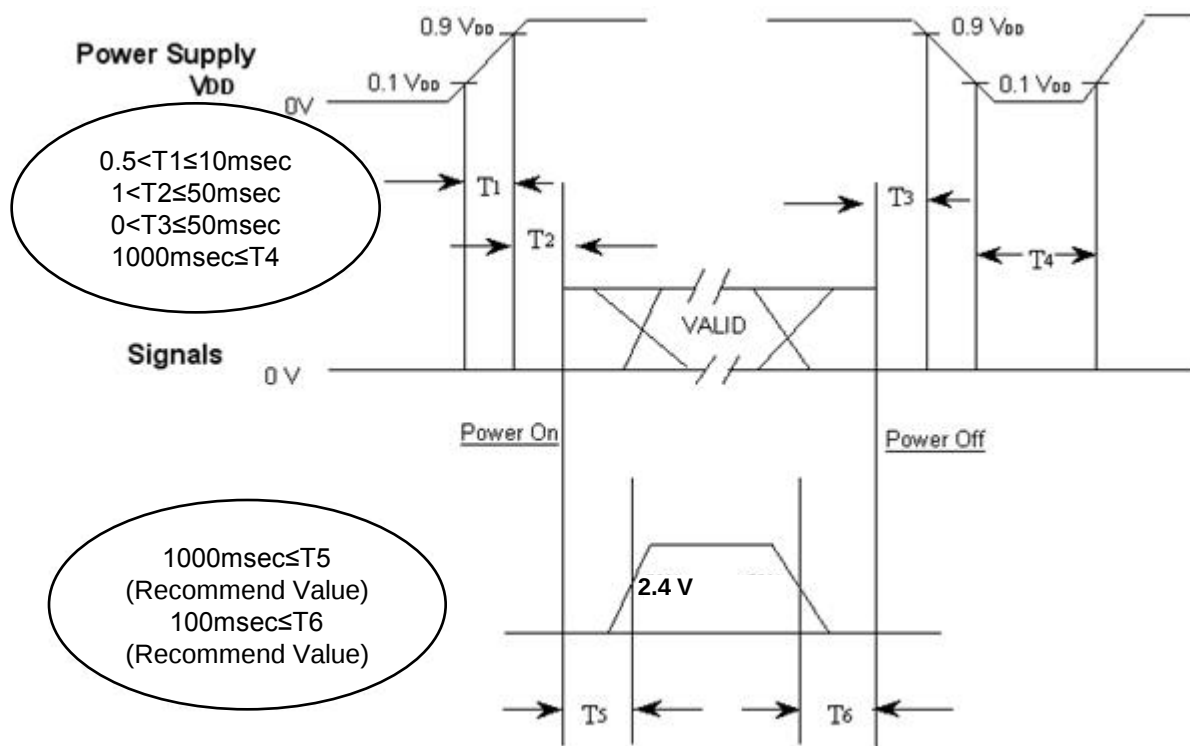

T1 : V_{DD} rising time from 10% to 90%

T2 : The time from V_{DD} to valid data at power ON.

T3 : The time from valid data off to V_{DD} off at power Off.

T4 : V_{DD} off time for Windows restart


T5 : The time from valid data to B/L enable at power ON.

T6 : The time from valid data off to B/L disable at power Off.

- The supply voltage of the external system for the Module input should be the same as the definition of V_{DD} .
- Apply the lamp voltage within the LCD operation range. When the backlight turns on before the LCD operation or the LCD turns off before the backlight turns off, the display may momentarily show abnormal screen.
- In case of V_{DD} = off level, please keep the level of input signals low or keep a high impedance.
- T4 should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.

7. Outline Dimension (Front View)

Samsung Confidential

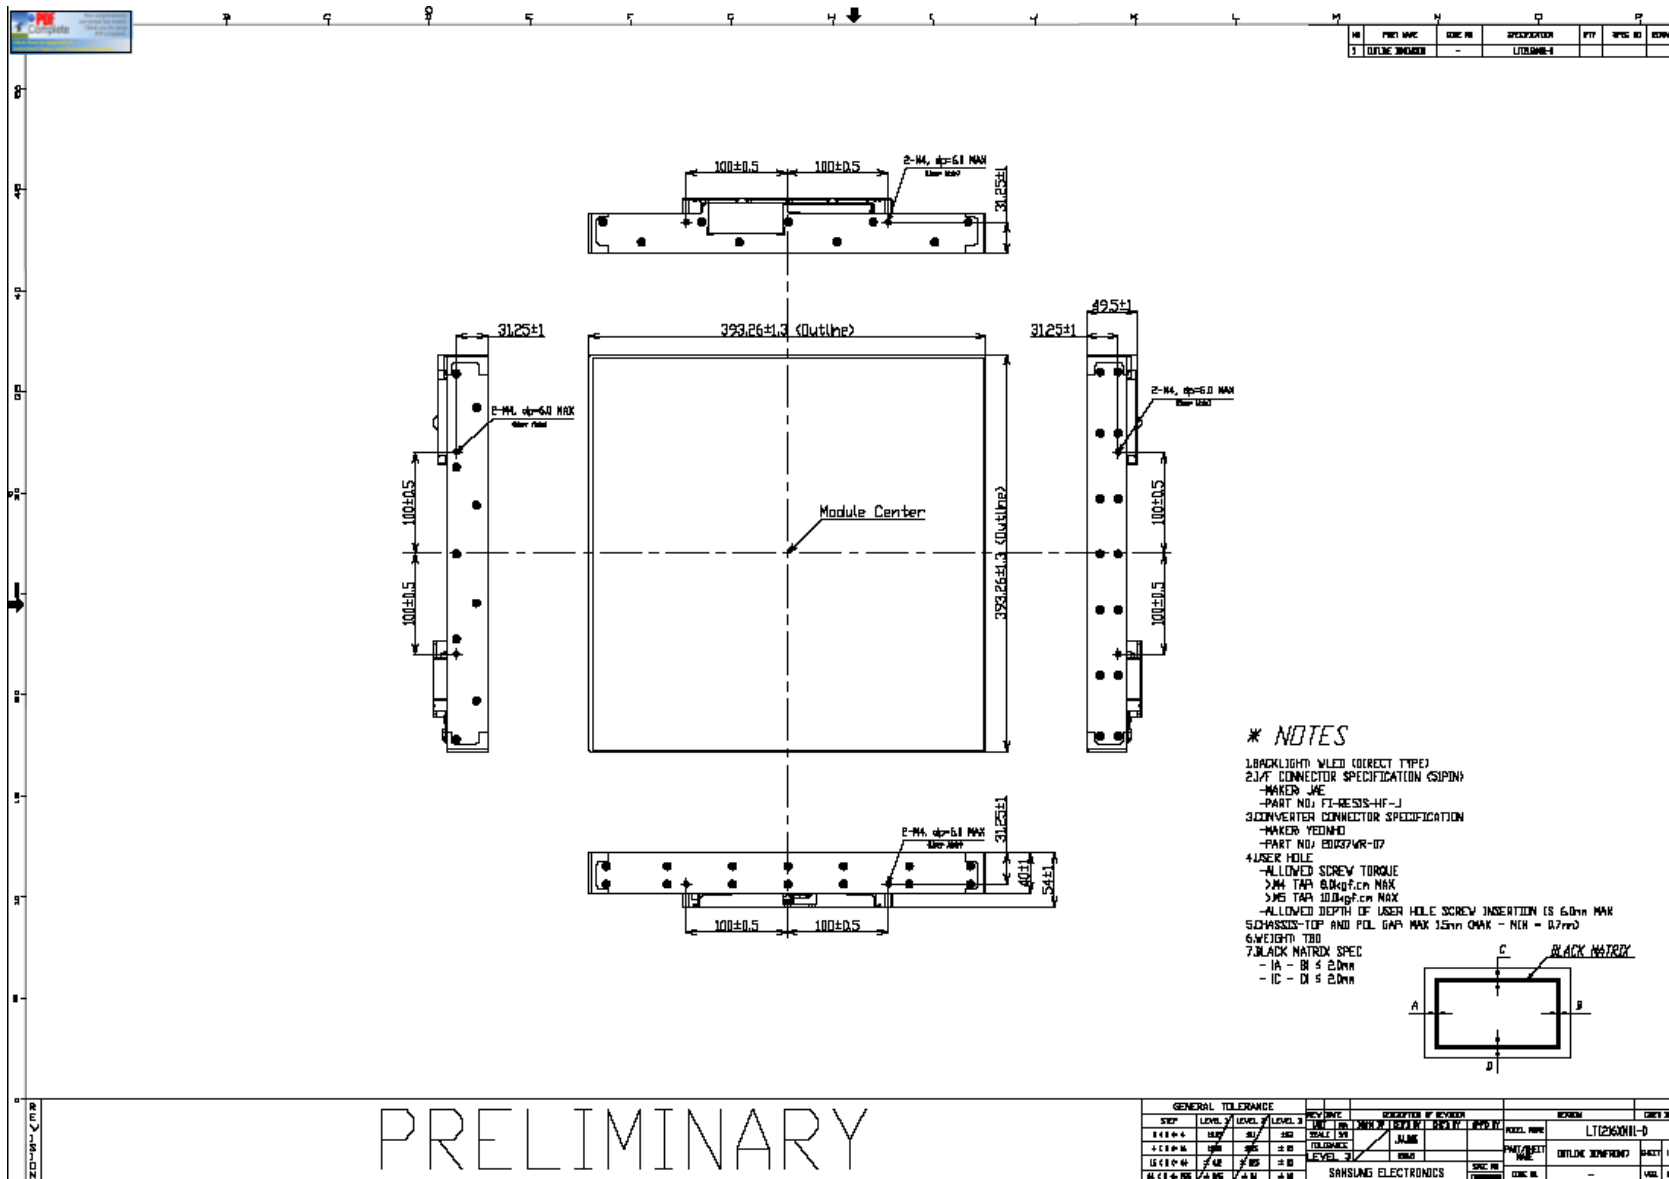


7. Outline Dimension (Rear View)

Samsung Confidential




NO	PART NAME	DATE	REVISION	REV	REV	REV
1	OUTLINE DIMENSION	-	120309-4			

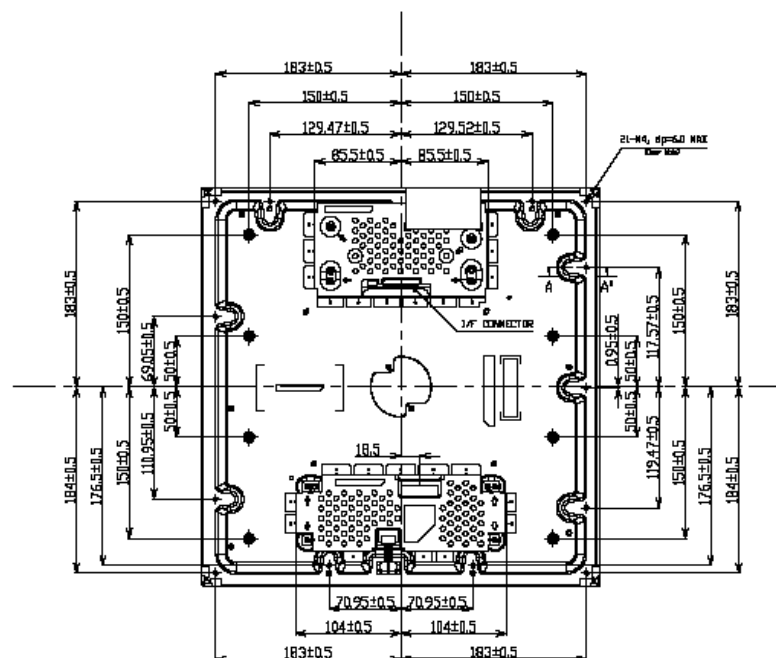

Section: A-A' (S:3/1)

* NOTES

- 1.BACKLIGHT WLED (DIRECT TYPE)
- 2.1/4 CONNECTOR SPECIFICATION (SIPIN)
-PART NO: FI-REISS-HF-J
- 3.CONVERTER CONNECTOR SPECIFICATION
-PART NO: E0037MR-07
- 4.USER HOLE
-ALLOWED SCREW TORQUE
>M4 TAP 6.0kgf.cm MAX
>M5 TAP 10.0kgf.cm MAX
-ALLOWED DEPTH OF USER HOLE SCREW INSERTION IS 6.0mm MAX
5.SCHASSIS-TOP AND POL GAP MAX 15mm OMAK - MIN = 0.7mm
- 6.WEIGHT TBD
- 7.BLACK MATRIX SPEC
- 1A - B ≤ 2.0mm
- 1C - D ≤ 2.0mm



PRELIMINARY

GENERAL TOLERANCE				EXEMPTION OF REVISION				REVISION		DATE	
STEP	LEVEL	LEVEL 1	LEVEL 2	LEVEL 3	LEVEL 4	LEVEL 5	LEVEL 6	LEVEL 7	LEVEL 8	LEVEL 9	LEVEL 10
1 (100%)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
2 (100%)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
3 (100%)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
4 (100%)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
5 (100%)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
6 (100%)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
7 (100%)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
8 (100%)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
9 (100%)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
10 (100%)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1


8. PACKING

8.1 CARTON (Internal Package)

(1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

(2) Packing Method

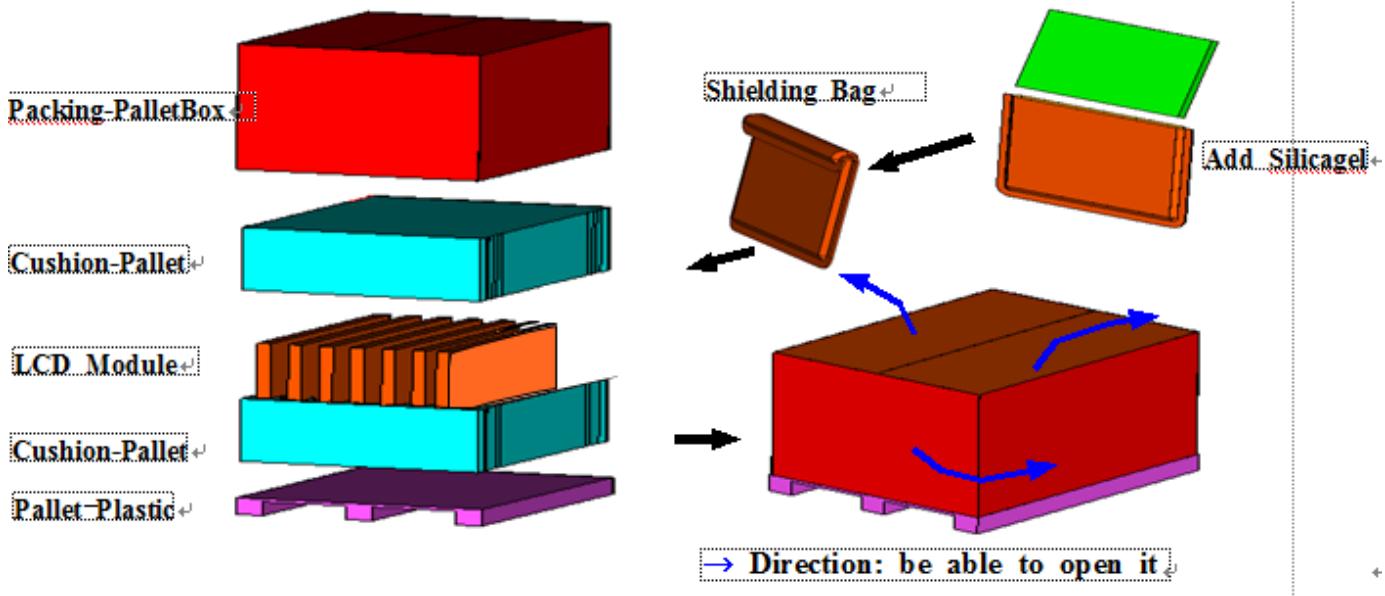

8.2 Packing Specification

Item	Specification	Remark
LCD Packing	36ea / (Packing-Pallet Box)	1. 4.2Kg / LCD (36ea) 2. TBD Kg / Cushion-pallet (4ea) 3. TBD Kg / Packing-Pallet Box (1ea) 4. Cushion-pallet Material : EPS 5. Packing-Pallet Box Material : SW4
Pallet	1Box / Pallet	1. Pallet weight = TBDkg => Pallet Material : HDPE
Packing Direction	Vertical	
Total Pallet Size	H x V x height	971mm(H) x 1136mm(V) x 1211mm(height)
Total Pallet Weight	TBDkg	Pallet(TBDkg) + Module(TBD kg) + Cushion(TBDkg) + Pallet-BOX(TBDkg)

8.3 Packing Storage condition

ITEM	Unit	Min.	Max.
Storage Temperature	(°C)	5	40
Storage Humidity	(%rH)	35	75
Storage life	12 months		
Storage Condition	- The storage room should provide good ventilation and temperature control. - Products should not be placed on the floor, but on the Pallet away from a wall. - Prevent products from direct sunlight, moisture nor water; Be cautious of a build up of condensation. - Avoid other hazardous environment while storing goods. - If products delivered or kept in conditions of over the storage period of 3 months, the recommended temperature or humidity range, we recommend you leave them at a temperature of 20°C and a humidity of 50% for 24 hours.		

8.4 Packing long-term Storage guide

Long –term Storage Process	More than 3months Storage or Low temp. Delivery/under 5°C Storage, →On the 20°C 50%rH Condition , More than 10hrs release.
----------------------------	---


9. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


(1) Part number : LTI216XM01

(2) Revision: Three letters


(3) Lot number : X X X X XXX XX X

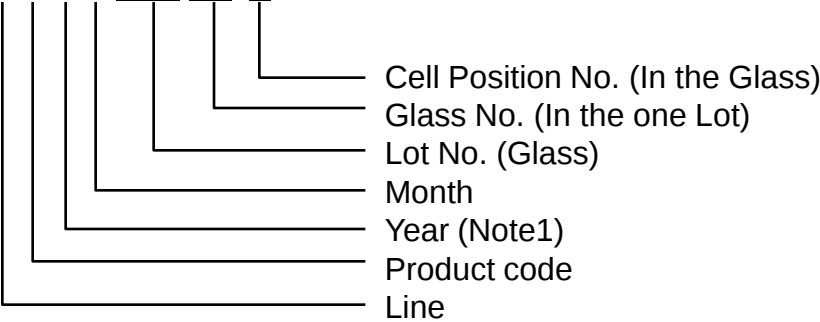

(4) Nameplate Indication

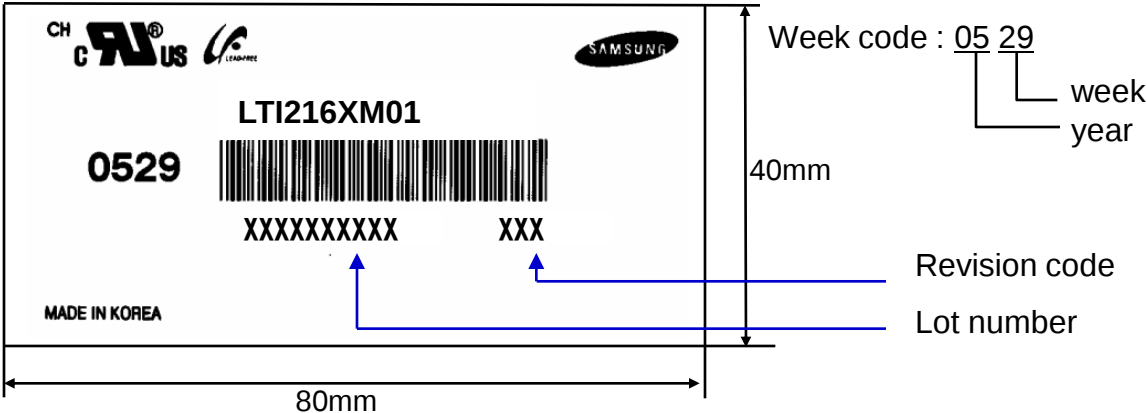

(5) Packing box attach

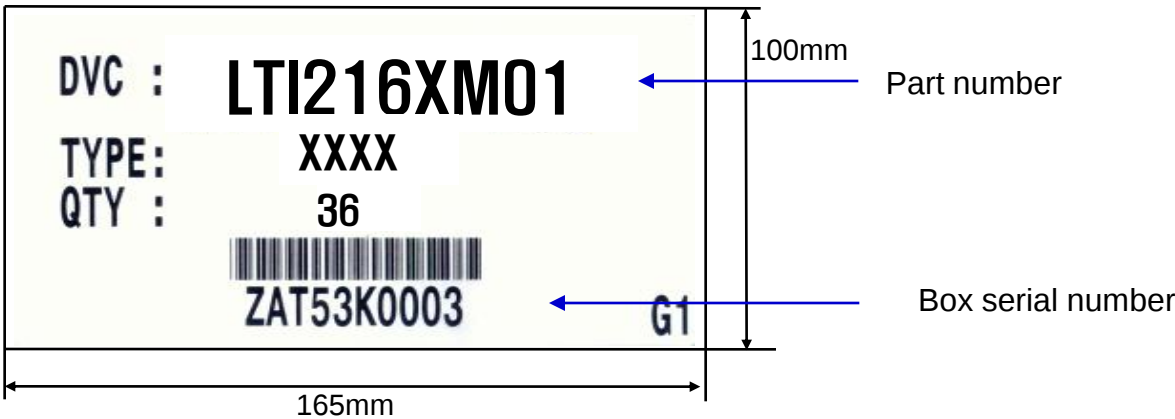

(6) Others

1. After service part

Lamps cannot be replaced because of the narrow bezel structure.

10. General Precautions

Samsung Confidential

10.1 Handling

- (a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.
- (b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.
- (c) Refrain from strong mechanical shock and / or any force to the Module.
In addition to damage, this may cause improper operation or damage to the Module and LED back light.
- (d) Note that polarizers are very fragile and could be damage easily.
Do not press or scratch the surface harder than a HB pencil lead.
- (e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.
- (f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.
- (g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.
- (i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or semiconductor would be damaged.
- (j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (k) Do not disassemble the Module.
- (l) Do not disassemble shield case of inverter & LVDS board
- (m) Do not connect N.C pins. (Samsung internal use only)
- (n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handling a module
- (o) Pins of I/F connector should not be touched directly with bare hands.

10.2 Storage

- (a) Do not leave the Module in high temperature, and high humidity for a long time. It is highly recommended to store the Module with temperature from 0 to 35 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD Module in direct sunlight.
- (c) The Module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storing.

10.3 Operation

- (a) Do not connect or disconnect the Module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the "Power on/off sequence"
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the back light connector and its inverter power supply should be connected directly with a minimized length. A longer cable between the back light and the inverter may cause lower luminance of LED and may require higher startup voltage(Vs).

10.4 Operation Condition Guide

- (a) The LCD product should be operated under normal conditions.
Normal condition is defined as below;
 - Temperature : $20 \pm 15^{\circ}\text{C}$
 - Humidity : $55 \pm 20\%$
 - Display pattern : continually changing pattern (Not stationary)
- (b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the Module may be damaged.
- (d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.
To avoid image sticking, it is recommended to use a screen saver.
- (e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.
- (f) Please contact SEC in advance when you display the same pattern for a long time.