

M54542L

BI-DIRECTIONAL MOTOR DRIVER

DESCRIPTION

The M54542L, BI-DIRECTIONAL MOTOR DRIVER, consists of a full bridge power driver designed for D-C motor control.

FEATURES

- 9-pin single-in-line power tab package
- Integral diodes for transient suppression
- 1.2A output current
- PMOS compatible input

APPLICATIONS


- Audio, video cassette recorders
- Floppy disk driver

FUNCTION

The M54542L, full bridge motor driver, has the logic circuitry and darlington-pair power drivers for bidirectional control of D-C motors operating at currents up to 1.2A.

The power supplies for the logic circuitry and the drivers are separated so that the applied voltage to the motor can be controlled by the V_{CC}' of the driver power supply voltage.

PIN CONFIGURATION (TOP VIEW)

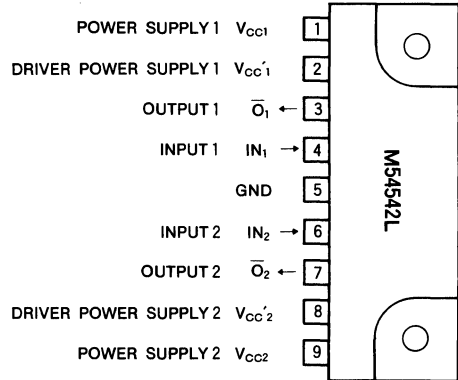


Outline 9P9

LOGIC TRUTH TABLE

| INPUT | | OUTPUT | | NOTE |
|-----------------|-----------------|----------------|----------------|------|
| IN ₁ | IN ₂ | O ₁ | O ₂ | |
| L | L | "OFF" state | "OFF" state | Open |
| H | L | H | L | ○ |
| L | H | L | H | ○ |
| H | H | "OFF" state | "OFF" state | Open |

CIRCUIT SCHEMATIC

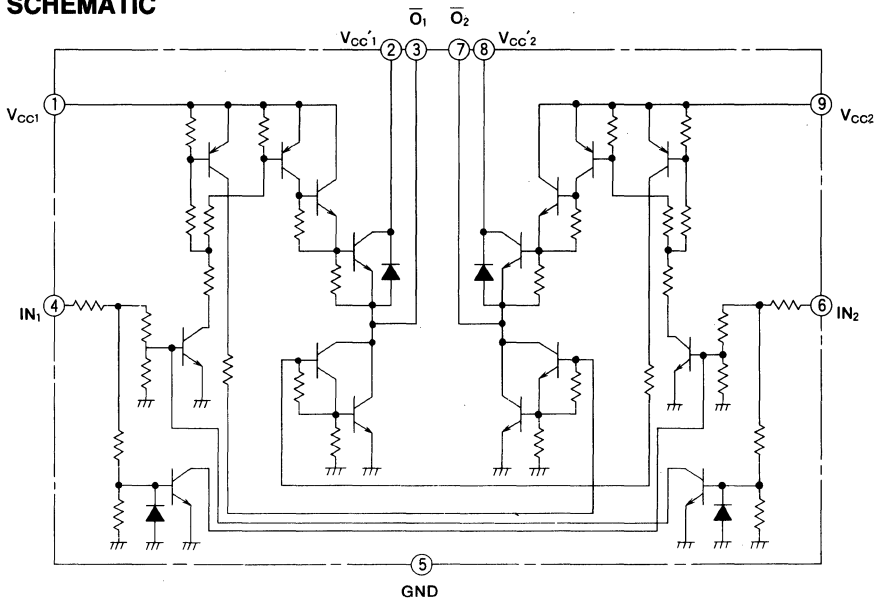

BI-DIRECTIONAL MOTOR DRIVER

ABSOLUTE MAXIMUM RATINGS (T_a=25°C, unless otherwise noted)

| Symbol | Parameter | Conditions | Ratings | Unit |
|---------------------|-------------------------------------|---|---------------------------|------|
| V _{CC} | Supply voltage | | -0.5~+16 | V |
| V _{CC'} | Driver voltage | | -0.5~V _{CC} | V |
| V _I | Input voltage | | -0.5~V _{CC} | V |
| V _O | Output voltage | | -0.5~V _{CC} +2.5 | V |
| I _{O(max)} | Peak output current | t _{op} =10ms Repetitive cycle 0.2Hz max | ±1200 | mA |
| I _O | Continuous output current | | ±330 | mA |
| P _d | Power dissipation | T _a =60°C | 1000 | mW |
| T _{opr} | Operating ambient temperature range | | -10~+60 | °C |
| T _{stg} | Storage temperature range | | -55~+125 | °C |

RECOMMENDED OPERATING CONDITIONS (T_a=25°C, unless otherwise noted)


| Symbol | Parameter | Conditions | Limits | | | Unit |
|------------------|---------------------------|---|--------|-----|-----------------|------|
| | | | Min | Typ | Max | |
| V _{CC} | Supply voltage | | 6 | 14 | 15 | V |
| I _O | Continuous output current | | | | ±300 | mA |
| V _{IH} | "H" Input voltage | | 3 | 5 | V _{CC} | V |
| V _{IL} | "L" Input voltage | | | 0 | 0.4 | V |
| T _{OFF} | Input switching interval | It is prohibited to switch the inputs at the same time. | 10 | 300 | | ms |

ELECTRICAL CHARACTERISTICS (T_a=25°C, unless otherwise noted)


| Symbol | Parameter | Test conditions | | Limits | | | Unit |
|----------------------|-------------------------------|--|--|--------|------|------|------|
| | | | | Min | Typ* | Max | |
| I _{O(leak)} | Output leakage current | V _{CC} =V _{CC'} =20V V _{I1} =V _{I2} =3V | V _O =20V | | | 100 | μA |
| | | | V _O =0V | | | -100 | |
| V _{OH} | "H" Output saturation voltage | V _{CC} =V _{CC'} =12V I _{OH} =-300mA | V _{I1} =3V, V _{I2} =0V V _{I1} =0V, V _{I2} =3V | 9.7 | 10.2 | | V |
| V _{OL} | "L" Output saturation voltage | V _{CC} =V _{CC'} =12V I _{OL} =300mA | V _{I1} =3V, V _{I2} =0V V _{I1} =0V, V _{I2} =3V | | 0.9 | 1.4 | V |
| I _{IH} | "H" Input current | V _{CC} =V _{CC'} =12V | V _{I1} =3V V _{I2} =3V | | | 500 | μA |
| I _{CC} | Supply current | V _{CC} =V _{CC'} =16V | V _{I1} =3V, V _{I2} =0V | | 7 | 10 | mA |
| | | | V _{I1} =0V, V _{I2} =3V | | | | |
| | | | V _{I1} =0V, V _{I2} =0V | | 0 | | mA |
| | | | V _{I1} =3V, V _{I2} =3V | | | | |

* : The all typical values are at T_a=25°C

TYPICAL CHARACTERISTICS

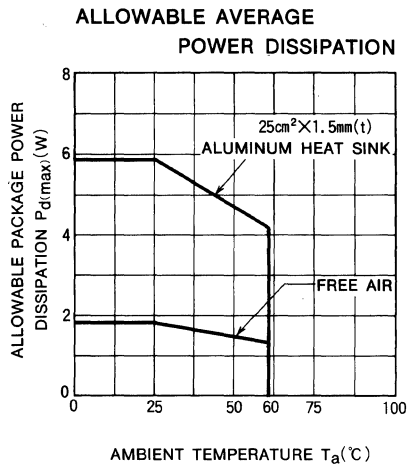

TYPICAL APPLICATION

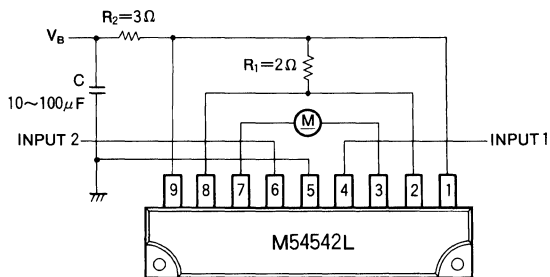

Note

1. It is prohibited to switch the both inputs simultaneously. The inputs should be driven separately to avoid high crossover current.
2. The pins 1, 9 and 2, 8 are separated and shall be connected externally.