



### Power RF Amplifiers

Power = 10.0 Watts


Bandwidth = 20 to 110 Mhz

Gain = 25.0 dB Vdd = 28.0 Volts


50 ohms Input/Output Impedance

### Description

The MADL01 is a 10 Watt, 2 stage high gain amplifier module covering a bandwidth of 20-110 Mhz. This compact module design is suitable for military applications in a rugged environment. A VAGC pin is provided to control the output power of the module.

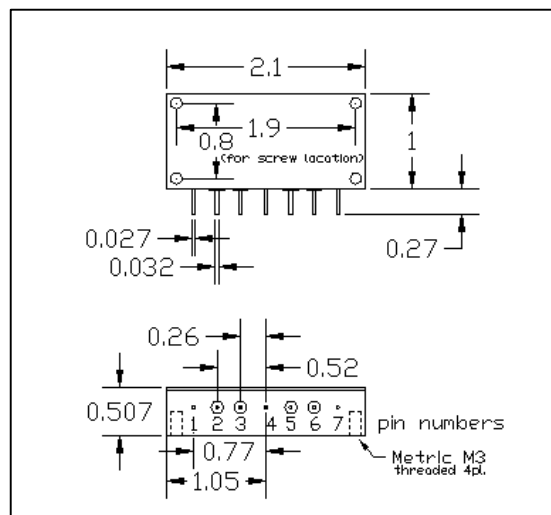

Pin 1=Ground Pin 4=Ground  
Pin 2=RF out Pin 5=VAGC  
Pin 3=Vdd Pin 6=RF in  
Pin 7=Ground

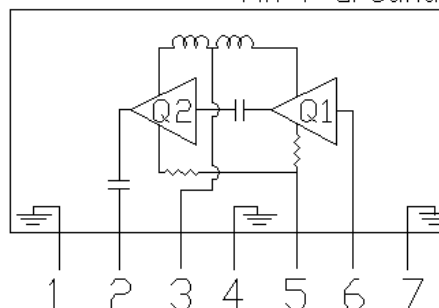

### Absolute Maximum Ratings (T=25 °C)

Parameter	Symbol	Value	Unit
DC supply Voltage 1	VDD1	32.0	V
DC supply Voltage 2	VDD2		V
AGC Voltage	VAGC	8.00	V
Input Power	Pin	0.02	W
Output Power	Pout	15.0	W
Operating Case Temp.	Tc	-20 to +85	°C
Storage Temperature	Tstg	-30 to +100	°C

### Electrical Characteristics: ( T=25 °C Zs=Zl=50 ohms. Vdd= 28.0 Volts )

Parameter	Symbol	Min	Typical	Max	Unit	Test Conditions
Frequency Range	BW	20		110	Mhz	50 ohm load
Output Power	Po	10.0			Watts	Idq = 1.20 Amps
Power Gain	PG	25.0			dB	@ Pout = 10.0 Watts
Total Efficiency	$\eta$	40			%	@ Pout = 10.0 Watts
2nd Harmonics	dso		-45.00		dBc	@ Pout = 10.0 W, Freq = 65 Mhz
Intermod - 2 tone	Ip3				dBm	Freq = 65 Mhz; AvePwr= W
Load Mismatch Tolerance	VSWR	10:1			Relative	All Phase Angles

# MADL01

