


Diode Modules

 $I_{FAV} = 200 \text{ A}$

MD 200

 $V_{RRM} = 1000-2400\text{V}$

V_{RRM} (V)	V_{RSM} (V)	TYPE
1000	1100	MD200-10
1200	1300	MD200-12
1600	1700	MD200-16
1800	1900	MD200-18
2200	2300	MD200-22
2400	2500	MD200-24

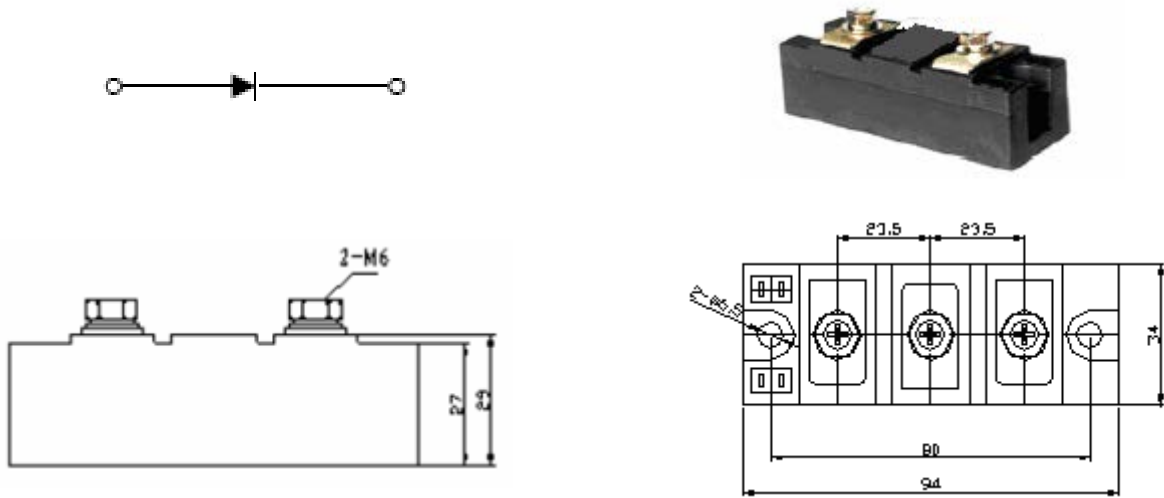

Maximum Ratings

Symbol	Item	Conditions	Ratings	Unit	
$I_{F(AV)}$	Average Forward Current	Single phase, half wave, 180° conduction, $T_c=96^\circ\text{C}$	200	A	
$I_{F(RMS)}$	R.M.S.Forward Current	Single phase, half wave, 180° conduction, $T_c=96^\circ\text{C}$	310	A	
I_{FSM}	Surge Forward Current	1/2 cycle, 50/60Hz, peak value, non-repetitive	5000/5500	A	
I_t^2	I_t^2	Value for one cycle of surge current	125000	A^2S	
T_j	Junction Temperature		-40 to +150	$^\circ\text{C}$	
T_{stg}	Storage Temperature		-40 to +125	$^\circ\text{C}$	
V_{ISO}	Isolation Breakdown Voltage (R.M.S.)	Main Terminal to case 1minute	2500	V	
M_d	Mounting	Mounting(M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)	$\text{N}\square\text{m}(\text{kgf}\square\text{cm})$



torque	Terminal(M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	
--------	--------------	-----------------------------------	----------	--

Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I_{RRM}	Repetitive Peak Reverse Current, max.	$T_j=150^\circ\text{C}$ at V_{RRM} , Singe phase, half wave	8.0	mA
V_{FM}	Forward Voltage Drop, max.	Foward current 200A, $T_j=25^\circ\text{C}$ Inst. measurement	1.4	V
$R_{th(j-c)}$	Thermal Impedance, max.	Junction to case	0.18	$^\circ\text{C}/\text{W}$

