

MDR706F

1.9GHz PHS Inter stage BPF

www.DataSheet4U.com

Characteristics


MDR706F	
Zin/Zout	50 ohm Nominal
Fc	1907MHz Nominal
Pass Band	1893-1919MHz
Insertion Loss	2.5 dB max (1893-1919MHz at 25 Deg.C)
	2.8 dB max (1893-1919MHz at -40 up to +85 Deg.C)
Ripple	0.5 dB max (1893-1919MHz)
V.S.W.R	2.0 max (1893-1919MHz)
Attenuation	40 dB min (at 1660MHz)
	15 dB min (at 2139MHz)

Number of ordered pieces

2000pcs/Reel



Dimensions

Dimension (Unit : mm)

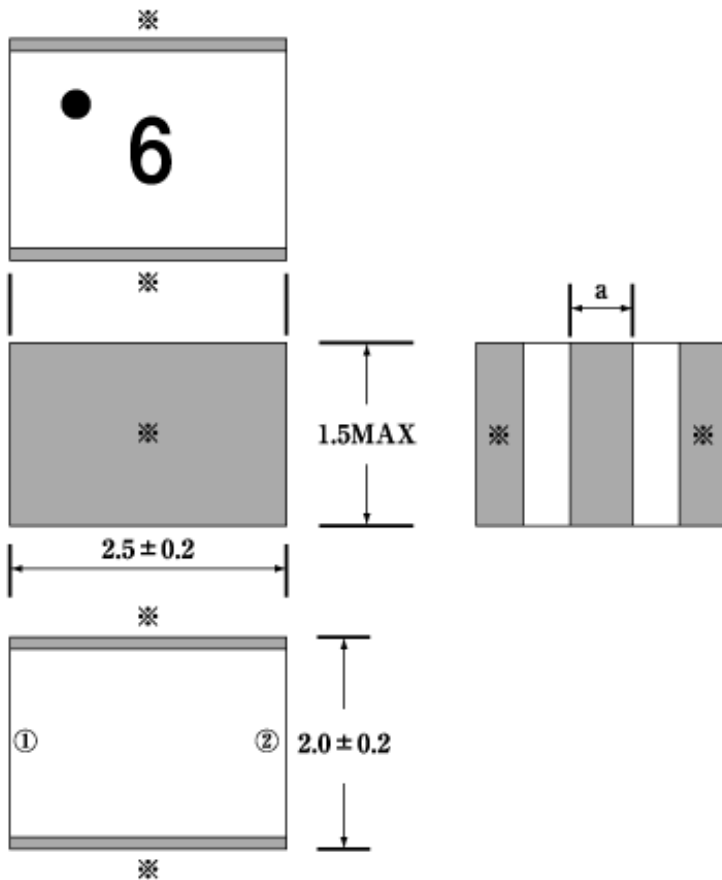



Terminal	
①	Input
②	Output
※	GND

$a=0.5 \pm 0.2$

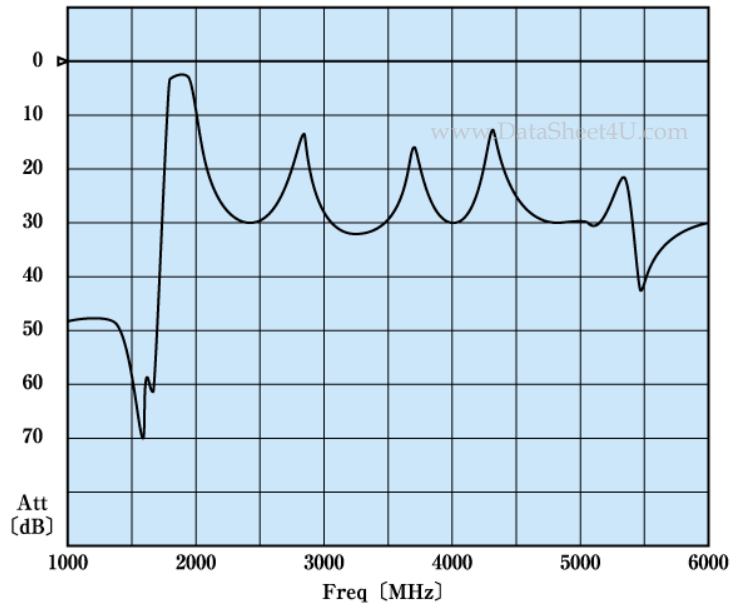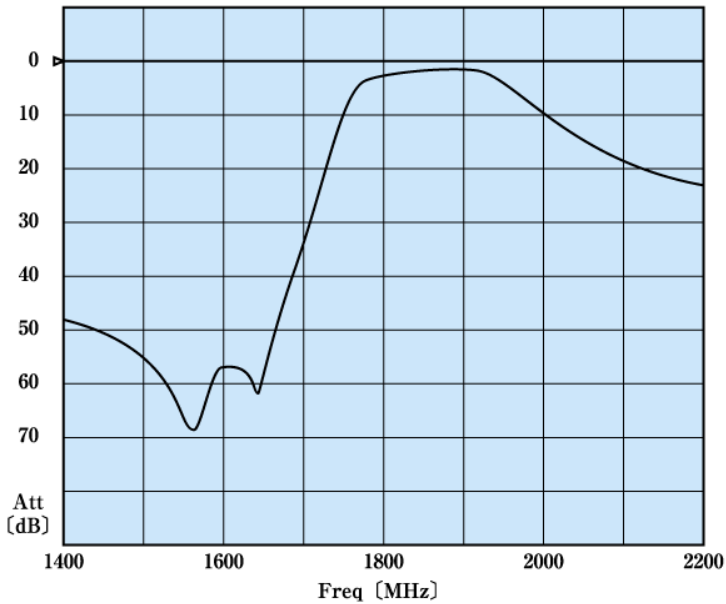

Resist pattern

Land pattern

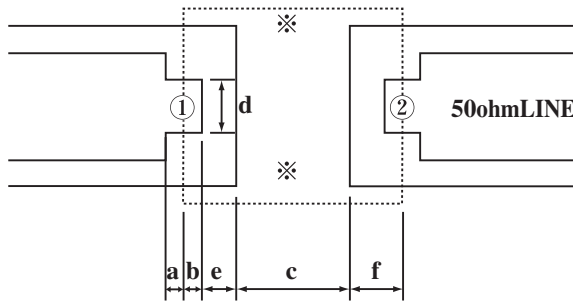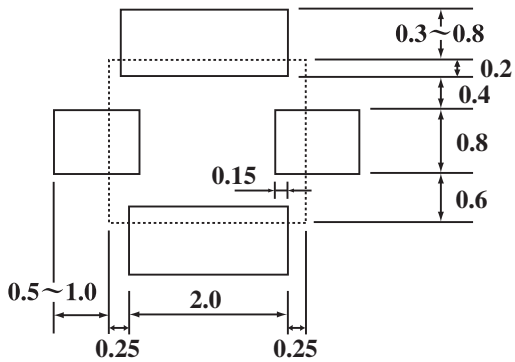


Terminal	
①	Input
②	Output
※	GND

Example : t=1.0mm

Glass-epoxy board
Glass-fluorine board
(High Frequency)

- a=0.2
- b=0.2
- c=1.3
- d=0.6
- e=0.4
- f=0.6
- (Unit : mm)



Reflow-soldering conditions(For reference)

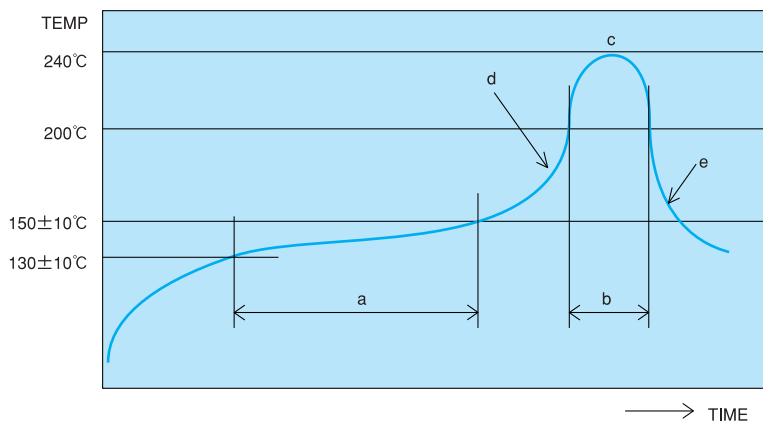

High temperature reflow-soldering conditions

(No more than 2 flows allowed)

- a:Preheating 40 to 120 seconds
- b:Heating 50 seconds
- c:Peak temperature 240°C,max.
- d:Temperature rising slope 10°C/1 second,max.
- e:Temperature falling slope 8°C/1 second,max.

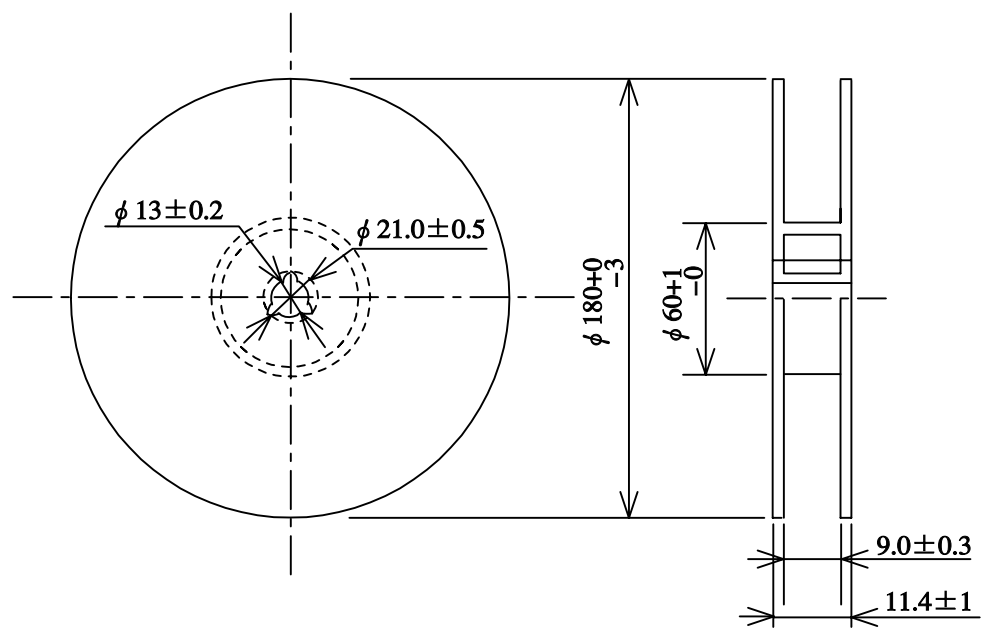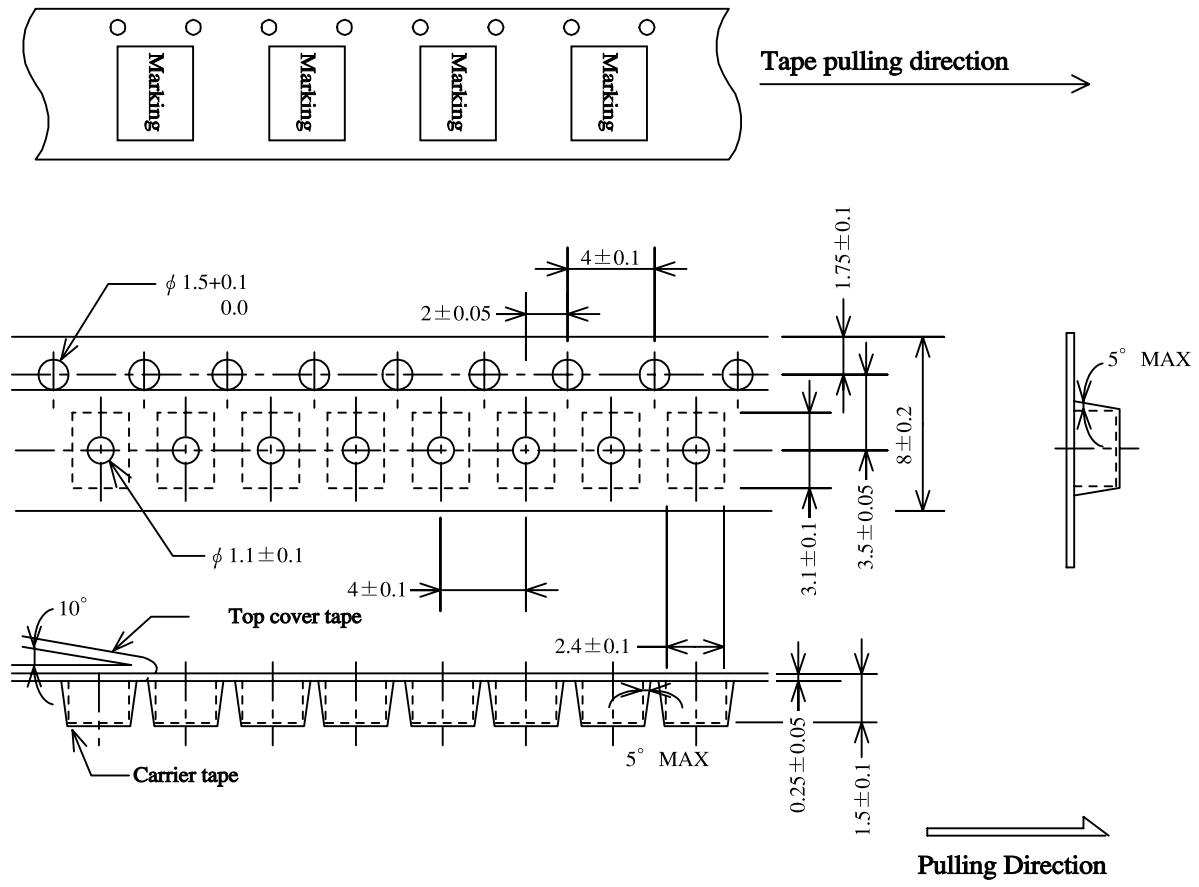

(2,000pcs/reel)