

# Surface Mount Voltage Controlled Oscillator

## EGSM 920 - 960 MHz

### MLO80100-00940

V2.00

### Features


- Miniature Size
- Surface Mount Package
- Electrically Shielded
- Low Phase Noise
- Highly Linear Tuning

### Description

The MLO80100-00940 is a fundamental single ended oscillator designed for use in cost sensitive wireless and telemetry applications. The device has been optimised by careful selection of the bipolar transistor and varactor diode for low phase noise and high linearity tuning characteristics.

The low profile surface mount package used provides for electrical shielding, ease of assembly and repeatable performance. M/A-COM's surface mount manufacturing techniques together with automatic assembly and electrical testing ensure a high degree of electrical and mechanical repeatability at low cost and in high volume. Manufacturing is carried out in an ISO 9000 qualified facility.

### LSM1 Package

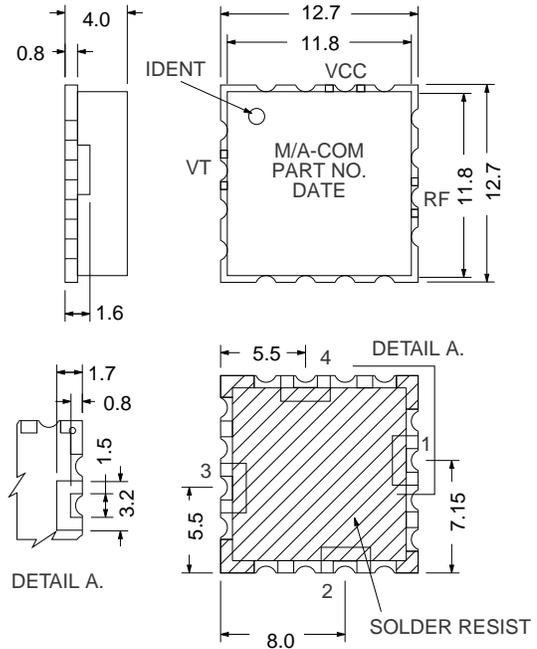

### Electrical Specifications<sup>1</sup>, T<sub>A</sub> = +25°C, V<sub>CC</sub> = +5 V (unless otherwise stated)

Parameter	Test Conditions	Units	Min	Typ	Max
Frequency Range		MHz	920		960
Tuning Voltage (V <sub>T</sub> ) <sup>2</sup>		V	+0.5		+4.5
RF Output Power <sup>3</sup>	920 - 960 MHz	dBm	-2.0		+2.0
Supply Voltage (V <sub>CC</sub> ) <sup>4</sup>		V	+4.75	+5.00	+5.25
Supply Current (I <sub>CC</sub> )		mA			15
Phase Noise <sup>5</sup>	SSB at 100 KHz offset from carrier	dBc/Hz		-128	-125
Tuning Sensitivity	920 - 960 MHz	MHz/V		15	
Tuning Linearity	920 - 960 MHz	Ratio		1.2	1.7
Modulation Bandwidth	3 dB bandwidth	MHz	2.0		
Harmonic Outputs <sup>6</sup>		dBc			-15
Frequency Pushing	V <sub>CC</sub> 4.75V to 5.25V	MHz/V			2.0
Frequency Pulling	1.5:1 VSWR load, all phases	MHz			2.0
Frequency Drift		MHz/°C		0.06	
Tune Input Capacitance		pF			50

1. All specifications apply with a 50 ohm load impedance.
2. Tuning voltages shown are the minimum and maximum voltages required to tune the frequency range including temperature effects -20°C to +70°C. Devices will oscillate normally with tuning voltages from 0V to +10V.
3. Output power window includes unit to unit variation, temperature effects -20°C to +70°C and frequency flatness (typically ±0.5 dB at any constant temperature).

4. Devices may be operated at lower supply voltage with reduced performance.
5. For typical phase noise at other offsets see phase noise curve.
6. No non-harmonic spurious visible when measured on a test system with a dynamic range of 70 dB.

Specifications Subject to Change Without Notice.

M/A-COM Ltd.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595  
 Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020

