



MMBT2222AW

NPN GENERAL PURPOSE SWITCHING TRANSISTOR

Voltage Range 40 Volts
Power 150 Watts

Features

- * NPN epitaxial silicon, planar design
- * Collector-emitter voltage $V_{CE} = 40V$
- * Collector current $I_C = 600mA$
- * Both normal and Pb free product are available :
Normal : 80~95% Sn, 5~20% Pb
Pb free: 98.5% Sn above


Mechanical Data

Case: SOT-323, Plastic


Terminals: Solderable per MIL-STD-202, Method 208

Approx. Weight: 0.0052 gram

Marking: M2A

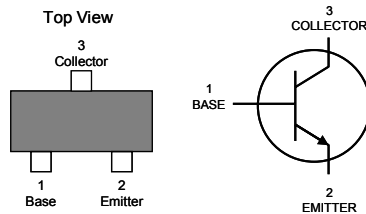

SOT-323

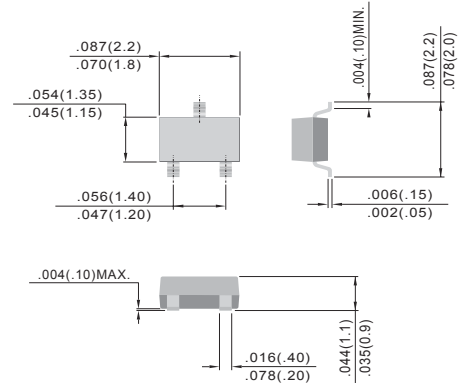

Dimensions in millimeters

ABSOLUTE RATINGS

PARAMETER	Symbol	Value	Units
Collector - Emitter Voltage	V_{CE0}	40	V
Collector - Base Voltage	V_{CB0}	75	V
Emitter - Base Voltage	V_{EB0}	6.0	V
Collector Current - Continuous	I_C	600	mA

THERMAL CHARACTERISTICS

PARAMETER	Symbol	Value	Units
Max Power Dissipation (Note 1)	P_{TOT}	150	mW
Thermal Resistance , Junction to Ambient	$R_{\theta JA}$	833	$^{\circ}C/W$
Junction Temperature	T_J	-55 to 150	$^{\circ}C$
Storage Temperature	T_{STG}	-55 to 150	$^{\circ}C$

NOTE:

1. Transistor mounted on FR-5 board 1.0 x 0.75 x 0.062 in.

[Http://www.upm.com.tw](http://www.upm.com.tw)

E-mail: upm.tw@msa.hinet.net



MMBT2222AW

NPN GENERAL PURPOSE SWITCHING TRANSISTOR

Voltage Range 40 Volts
Power 150 Watts

ELECTRICAL CHARACTERISTICS

PARAMETER	Symbol	Test Condition	MIN.	TYP.	MAX.	Units
Collector - Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1.0mA, I_B=0$	40	-	-	V
Collector - Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	75	-	-	V
Emitter - Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	6.0	-	-	V
Base Cutoff Current	I_{BL}	$V_{CE}=60V, V_{EB}=3.0V$	-	-	20	nA
Collector Cutoff Current	I_{cEX}	$V_{CE}=60V, V_{EB}=3.0V$	-	-	10	nA
	I_{cBO}	$V_{CE}=60V, I_E=0, V_{CE}=60V, I_E=0, T_J=125^\circ C$	-	-	10 10	nA uA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=3.0V, I_C=0,$	-	-	100	nA
DC Current Gain	h_{FE}	$I_C=0.1mA, V_{CE}=10V$	35	-	-	-
		$I_C=1.0mA, V_{CE}=10V$	50	-	-	-
		$I_C=10mA, V_{CE}=10V$	75	-	-	-
		$I_C=10mA, V_{CE}=10V, T_J=125^\circ C$	35	-	-	-
		$I_C=150mA, V_{CE}=10V$ (Note 2)	100	-	300	-
		$I_C=150mA, V_{CE}=1V$ (Note 2)	50	-	-	-
$I_C=500mA, V_{CE}=10V$ (Note 2)	40	-	-	-		
Collector - Emitter Saturation Voltage (Note 2)	$V_{CE(SAT)}$	$I_C=150mA, I_B=15mA$ $I_C=500mA, I_B=50mA$	-	-	0.3 1.0	V
Base - Emitter Saturation Voltage (Note 2)	$V_{BE(SAT)}$	$I_C=150mA, I_B=15mA$ $I_C=500mA, I_B=50mA$	0.6 -	-	1.2 2.0	V
Collector - Base Capacitance	C_{CBO}	$V_{CB}=10V, I_E=0, f=1MHz$	-	-	80	pF
Emitter - Base Capacitance	C_{EBO}	$V_{CB}=0.5V, I_C=0, f=1MHz$	-	-	25	pF
Delay Time	t_d	$V_{CC}=3V, V_{BE}=-5V, I_C=150mA, I_B=15mA$	-	-	10	ns
Rise Time	t_r	$V_{CC}=3V, V_{BE}=-5V, I_C=150mA, I_B=15mA$	-	-	25	ns
Storage Time	t_s	$V_{CC}=30V, I_C=150mA, I_B1=I_B2=15mA$	-	-	225	ns
Fall Time	t_f	$V_{CC}=30V, I_C=150mA, I_B1=I_B2=15mA$	-	-	60	ns

Note 2: Pulse Test: Pulse Width < 300 us, Duty Cycle < 2.0%.

SWITCHING TIME EQUIVALENT TEST CIRCUITS

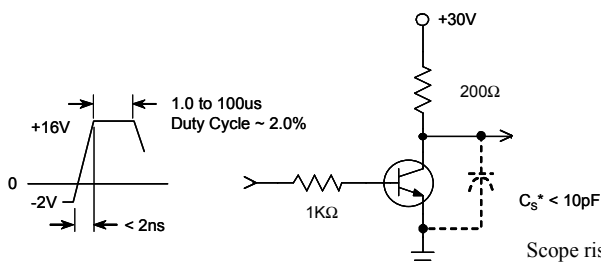


Fig. 1. Turn-On Time

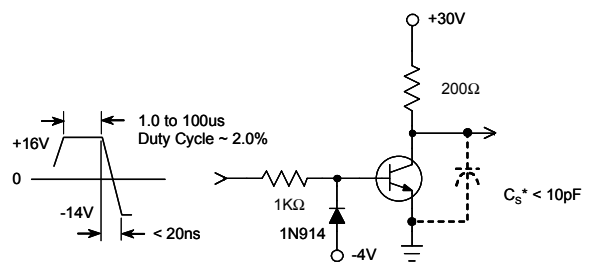


Fig. 2. Turn-Off Time

* Total shunt capacitance of test jig, connectors, and oscilloscope



MMBT2222AW

NPN GENERAL PURPOSE SWITCHING TRANSISTOR

Voltage Range 40 Volts
Power 150 Watts

ELECTRICAL CHARACTERISTICS CURVE

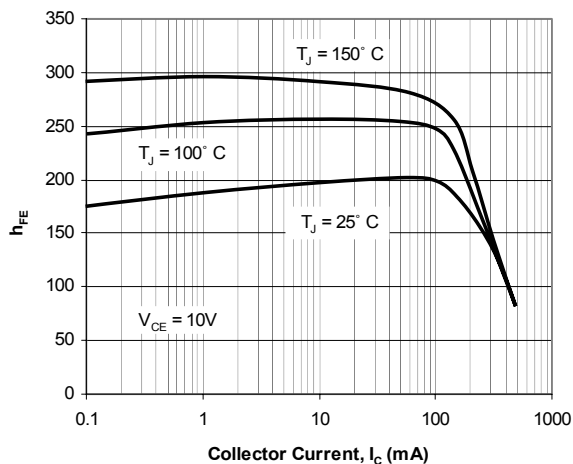


Fig. 3. Typical h_{FE} vs Collector Current

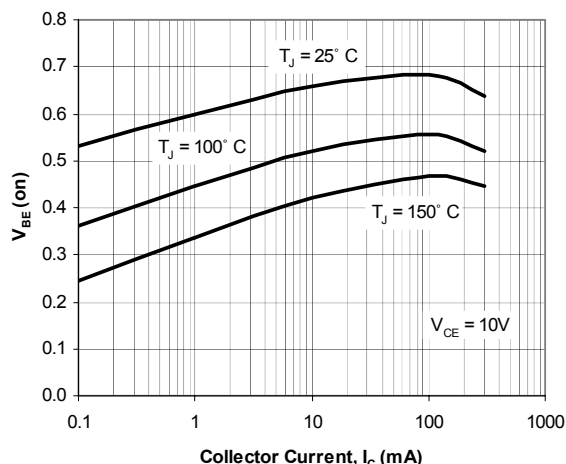


Fig. 4. Typical V_{BE} vs Collector Current

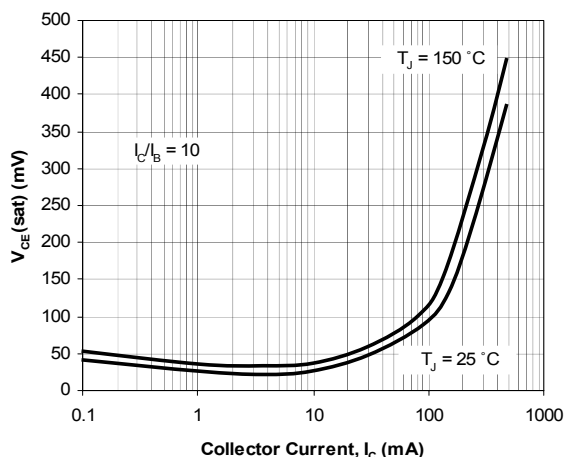


Fig. 5. Typical $V_{CE(sat)}$ vs Collector Current

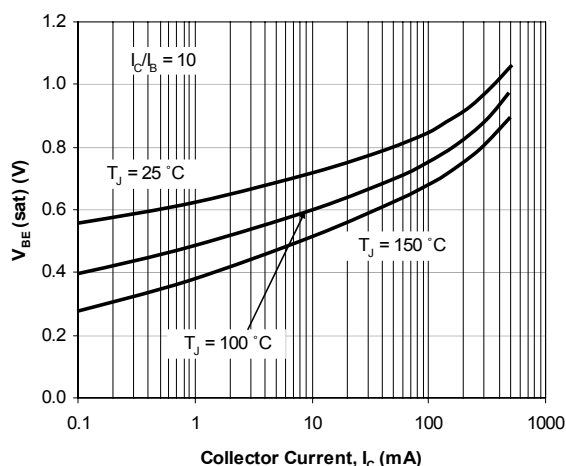


Fig. 6. Typical $V_{BE(sat)}$ vs Collector Current

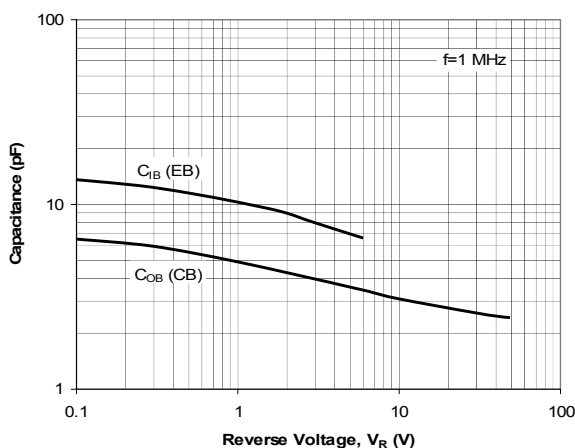


Fig. 7. Typical Capacitances vs Reverse Voltage




MMBT2222AW

NPN GENERAL PURPOSE SWITCHING TRANSISTOR

Voltage Range 40 Volts
Power 150 Watts

Mounting Pad Layout

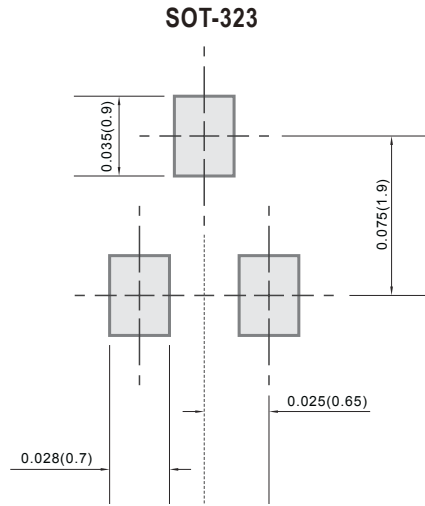

Dimensions in millimeters

Order Information

Packing information

T/R - 12K per 13" plastic Reel

T/R - 3.0K per 7" plastic Reel

Legal Statement

* Important Notice

This information is intended to unambiguously characterize the product in order to facilitate the customer's evaluation of the device in the application. The information will help the customer's technical experts determine that the device is compatible and interchangeable with similar devices made by other vendors. The information in this data sheet is believed to be reliable and accurate. The specifications and information herein are subject to change without notice. New products and improvements in products and product characterization are constantly in process. Therefore, the factory should be consulted for the most recent information and for any special characteristics not described or specified.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract. The information presented is believed to be accurate and reliable, and may change without notice in advance. No liability will be accepted by the publisher for any consequence of use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.