

TFT COLOR LCD MODULE

NL2432HC17-07A

**6.8cm (2.7 Type)
QVGA**

DATA SHEET 
DOD-PP-0389 (1st edition)



**This DATA SHEET is updated document from
PRELIMINARY DATA SHEET DOD-PP-0219(1).**

**All information is subject to change without notice.
Please confirm the sales representative before
starting to design your system.**

INTRODUCTION

The Copyright to this document belongs to NEC LCD Technologies, Ltd. (hereinafter called "NEC"). No part of this document will be used, reproduced or copied without prior written consent of NEC.

NEC does and will not assume any liability for infringement of patents, copyrights or other intellectual property rights of any third party arising out of or in connection with application of the products described herein except for that directly attributable to mechanisms and workmanship thereof. No license, express or implied, is granted under any patent, copyright or other intellectual property right of NEC.

Some electronic parts/components would fail or malfunction at a certain rate. In spite of every effort to enhance reliability of products by NEC, the possibility of failures and malfunction might not be avoided entirely. To prevent the risks of damage to death, human bodily injury or other property arising out thereof or in connection therewith, each customer is required to take sufficient measures in its safety designs and plans including, but not limited to, redundant system, fire-containment and anti-failure.

The products are classified into three quality grades: "**Standard**", "**Special**", and "**Specific**" of the highest grade of a quality assurance program at the choice of a customer. Each quality grade is designed for applications described below. Any customer who intends to use a product for application other than that of Standard quality grade is required to contact an NEC sales representative in advance.

The **Standard** quality grade applies to the products developed, designed and manufactured in accordance with the NEC standard quality assurance program, which are designed for such application as any failure or malfunction of the products (sets) or parts/components incorporated therein a customer uses are, directly or indirectly, free of any damage to death, human bodily injury or other property, like general electronic devices.

Examples: Computers, office automation equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment, industrial robots, etc.

The **Special** quality grade applies to the products developed, designed and manufactured in accordance with an NEC quality assurance program stricter than the standard one, which are designed for such application as any failure or malfunction of the products (sets) or parts/components incorporated therein a customer uses might directly cause any damage to death, human bodily injury or other property, or such application under more severe condition than that defined in the Standard quality grade without such direct damage.

Examples: Control systems for transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, medical equipment not specifically designed for life support, safety equipment, etc.

The **Specific** quality grade applies to the products developed, designed and manufactured in accordance with the standards or quality assurance program designated by a customer who requires an extremely higher level of reliability and quality for such products.

Examples: Military systems, aircraft control equipment, aerospace equipment, nuclear reactor control systems, medical equipment/devices/systems for life support, etc.

The quality grade of this product is the "**Standard**" unless otherwise specified in this document.

CONTENTS

INTRODUCTION2

1. OUTLINE.....4

 1.1 STRUCTURE AND PRINCIPLE4

 1.2 APPLICATION4

 1.3 FEATURES4

2. GENERAL SPECIFICATIONS5

3. BLOCK DIAGRAM6

4. DETAILED SPECIFICATIONS8

 4.1 MECHANICAL SPECIFICATIONS8

 4.2 ABSOLUTE MAXIMUM RATINGS8

 4.3 ELECTRICAL CHARACTERISTICS9

 4.4 SETTING OF THE INTERNAL RESISTER10

 4.5 INTERFACE PIN CONNECTIONS15

 4.6 DISPLAY COLORS AND INPUT DATA SIGNALS17

 4.7 DISPLAY POSITIONS18

 4.8 SCANNING DIRECTIONS18

 4.9 INPUT SIGNAL TIMINGS19

 4.9.1 RGB interface (Ta= 25°C, VCC= 3.0V)19

 4.9.2 Serial interface (Ta= 25°C, VCC= 3.0V)22

 4.10 OPTICAL CHARACTERISTICS23

5. RELIABILITY TESTS26

6. PRECAUTIONS27

 6.1 MEANING OF CAUTION SIGNS27

 6.2 CAUTIONS27

 6.3 ATTENTIONS27

 6.3.1 Handling of the product27

 6.3.2 Environment28

 6.3.3 Characteristics28

 6.3.4 Other28

7. OUTLINE DRAWINGS29

1. OUTLINE

1.1 STRUCTURE AND PRINCIPLE

Color LCD module NL2432HC17-07A is composed of the amorphous silicon thin film transistor liquid crystal display (a-Si TFT LCD) panel structure with driver LSIs for driving the TFT (Thin Film Transistor) array and a backlight.



The a-Si TFT LCD panel structure is injected liquid crystal material into a narrow gap between the TFT array glass substrate and a color-filter glass substrate.

Color (Red, Green, Blue) data signals from a host system (e.g. signal generator, etc.) are modulated into best form for active matrix system by a controller, and sent to the driver LSIs which drive the individual TFT arrays.

The TFT array as an electro-optical switch regulates the amount of transmitted light from the backlight assembly, when it is controlled by data signals. Color images are created by regulating the amount of transmitted light through the TFT array of red, green and blue dots.

1.2 APPLICATION

- PDAs
- Handy terminal



1.3 FEATURES


- Transmissive type
- Backlight attached
- High luminance
- High contrast
- Small footprint and light weight
- Including LCD controller and power supply
- 6-bit digital RGB signals
- Compliance with the European RoHS directive (2002/95/EC)




2. GENERAL SPECIFICATIONS


<i>Display area</i>	41.04 (H) × 54.72 (V) mm	
<i>Diagonal size of display</i>	6.8cm (2.7 inches)	
<i>Drive system</i>	a-Si TFT active matrix	
<i>Display color</i>	262,144 colors	
<i>Pixel</i>	240 (H) × 320 (V) pixels	
<i>Pixel arrangement</i>	RGB (Red dot, Green dot, Blue dot) vertical stripe	
<i>Dot pitch</i>	0.057 (H) × 0.171 (V) mm	
<i>Pixel pitch</i>	0.171 (H) × 0.171 (V) mm	
<i>Module size</i>	50.54 (H) × 68.62 (V) × 2.6 (D) mm (typ.)	
<i>Weight</i>	19g (typ.)	☆
<i>Polarizer surface</i>	Clear	
<i>Polarizer pencil-hardness</i>	3H (min.) [by JIS K5400]	
<i>Designed viewing direction</i>	<ul style="list-style-type: none"> • Viewing direction without image reversal: lower side (6 o'clock) • Viewing direction with contrast peak: upper side (12 o'clock) 	
<i>Luminance</i>	At $I_L = 18mA$ 550cd/m ² (typ.)	☆
<i>Contrast ratio</i>	At $I_L = 18mA$ 400:1 (typ.)	☆
<i>Response time</i>	$T_{on} + T_{off}$ (10% ← → 90%) 23 ms (typ.)	
<i>Signal system</i>	6-bit digital signals for data of RGB colors, Dot clock (CLK), Horizontal synchronous signal (HSYNC), Vertical synchronous signal (VSYNC) Serial interface (SPI correspondence) (/CS, SCL, SI)	
<i>Supply voltage</i>	VCC: 3.0V (typ.)	
<i>Power consumption</i>	LCD panel: 36mW (typ.) Backlight: 288mW (typ., at $I_L = 18mA$)	☆

3. BLOCK DIAGRAM

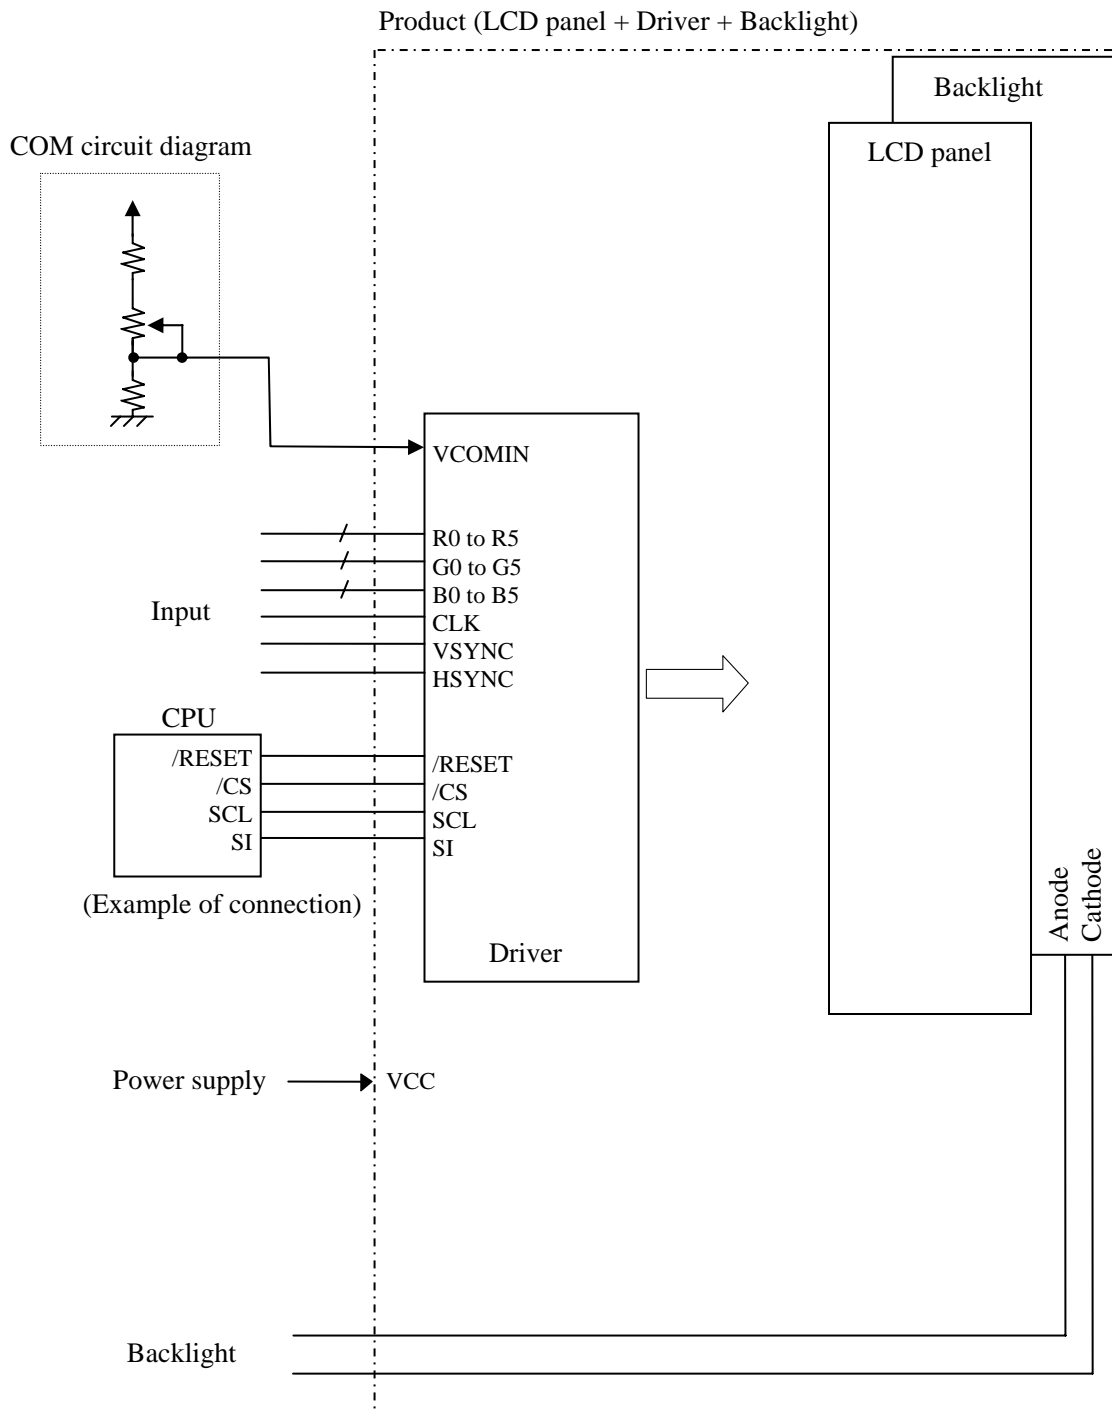

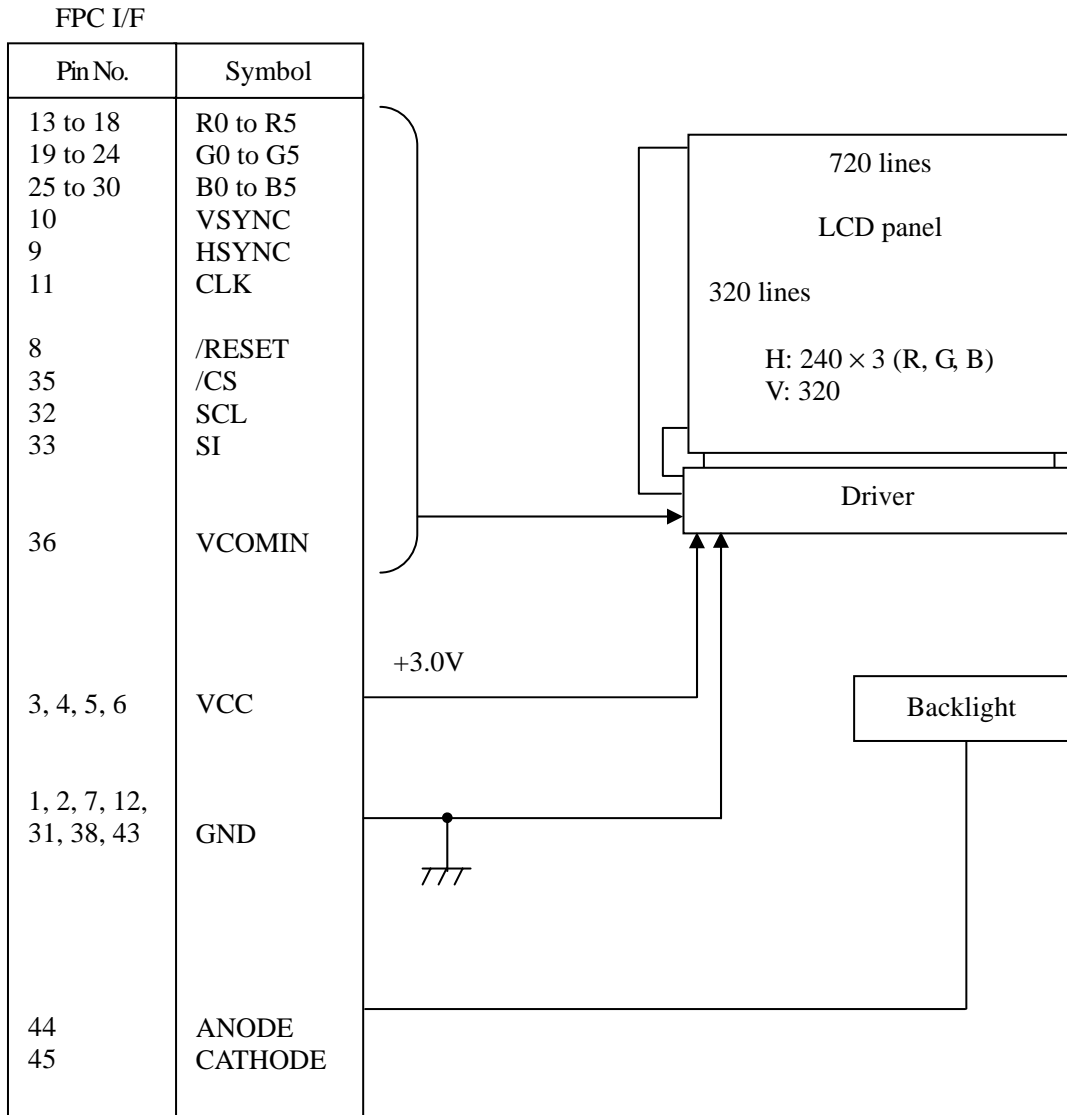

Reference design of COM circuit

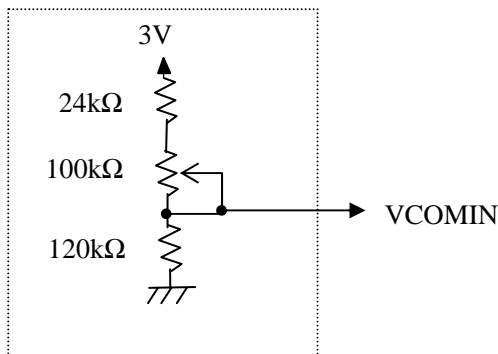

4. DETAILED SPECIFICATIONS

4.1 MECHANICAL SPECIFICATIONS

Parameter	Specification	Unit
Module size	50.54 ± 0.2 (W) × 68.62 ± 0.2 (H) × 2.6 ± 0.2 (D) Note1	Note2 mm
Display area	41.04 (H) × 54.72 (V)	Note2 mm
Weight	19 (typ.), 21 (max.)	g

Note1: Excluding FPC


Note2: See "7. OUTLINE DRAWINGS".



4.2 ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating	Unit	Remarks	
Supply voltage	VCC	-0.5 to +6.0	V	Ta = 25°C	
Logic input voltage	VI	-0.5 to VCC+0.5	V	Logic signals	
Backlight	Reverse voltage	VR	≤ 25	Ta = 25°C	
	Power dissipation	PD	≤ 615		
	Forward current	IL	Note1		
	Pulse forward current	IFP	100	Pulse width ≤ 10ms, Duty ≤ 1/10	
Storage temperature	Tst	-30 to +80	°C	-	
Operating temperature	Top	-20 to +70		Product surface Note2	
Relative humidity	Note3 RH		≤ 95	%	Ta ≤ 40°C
			≤ 85		40°C < Ta ≤ 50°C
			≤ 55		50°C < Ta ≤ 60°C
			≤ 36		60°C < Ta ≤ 70°C
Absolute humidity	Note3 AH	≤ 70 Note4	g/m ³	Ta > 70°C	
Storage altitude		≤ 13,600	m	-30°C ≤ Ta ≤ 80°C	
Operating altitude		≤ 4,850	m	-20°C ≤ Ta ≤ 70°C	

Note1: Allowable forward current

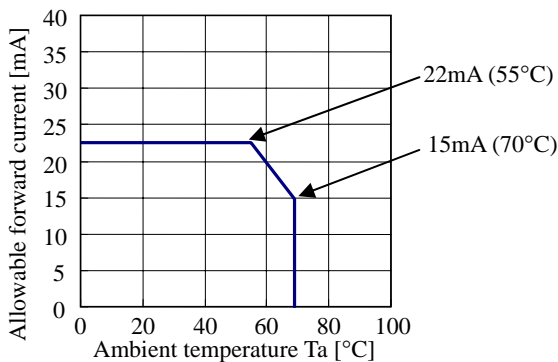

Note2: Measured at display area

Note3: No condensation

Note4: Water amount at Ta= 70°C and RH= 36%



4.3 ELECTRICAL CHARACTERISTICS


(1) Logic/ LCD driving

(Ta= 25°C)

Parameter	Symbol	min.	typ.	max.	Unit	Remarks
Logic supply voltage	VCC	2.85	3.0	3.45	V	-
Logic input high voltage	VIH	0.8VCC	-	VCC	V	Logic signal
Logic input low voltage	VIL	0	-	0.2VCC	V	
VCOMIN voltage	VCOMIN	-	2.0	-	V	at VCC= 3.0V Note1
VCC supply current	ICC	-	12	-	mA	Normal mode at VCC= 3.0V Note2
	ICCs	-	0.2	-	mA	Stand-by mode at VCC= 3.0V Note2

Note1: The optimum value for VCOMIN is in the range of 1.5 V to 2.5 V.

Recommended adjustment display for VCOMIN

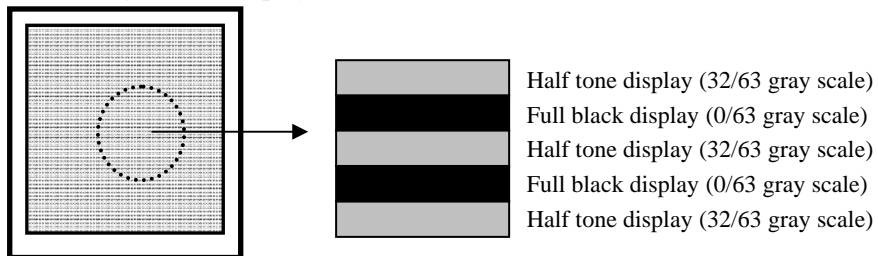

Note2: PPCLK= 5.0MHz, PPHSYNC= 19.53kHz, PPVSYNC= 60Hz,
 Checkered flag pattern (by EIAJ ED-2522)

(2) Backlight

(Ta= 25°C)

Parameter	Symbol	min.	typ.	max.	Unit	Remarks
Forward Current	IL	-	18	22	mA	-
Forward Voltage	VL	-	16	17.5	V	at IL= 18mA


4.4 SETTING OF THE INTERNAL RESISTER

Initial setting of the internal Resister is undefined data. So the Resister Data must be written in the Resister, after initialization by the /RESET pin. The Resister Data can be written from serial interface pins (/CS, SCL and SI). This serial interface supports SPI. The setting method is as follows.


(1) Command Byte Function

Bits	Functions	Discription
A7	-	-
A6	-	-
A5	Read / Write	0:Write 1:Read
A4	-	-
A3	-	-
A2	-	-
A1	-	-
A0	Register Number / Data	0:Register Number 1:Register Data

(2) Timing chart

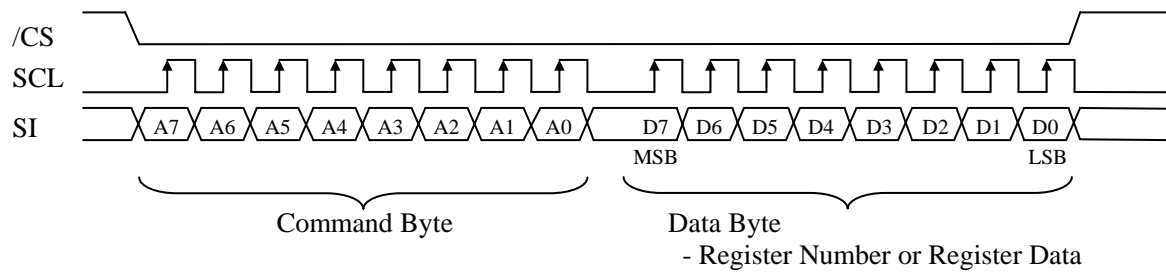

Ex) When data 55h is written to Register R26 (R1Ah)

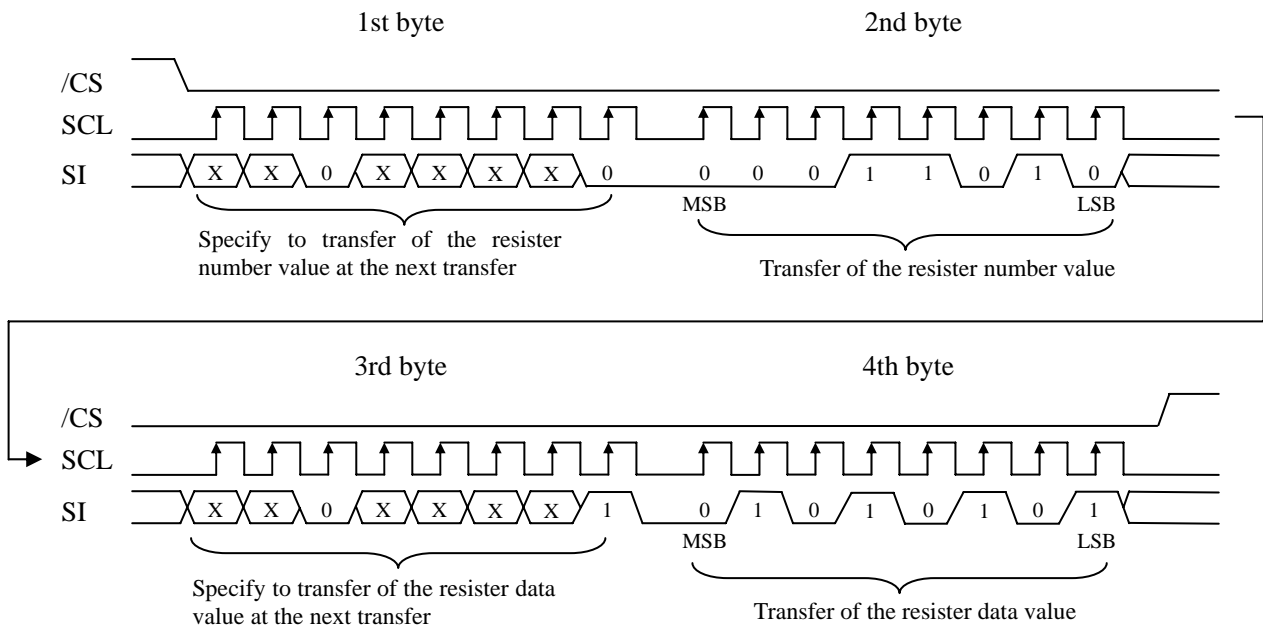

Note1: During 32-bit transfer of the Resister Data, /CS pin (Pin No.35) must be maintained active.

Note2: "X" is set in accordance with the usage conditions.

Command sequence

- Power On (At VCC=3.0V±0.15V)



Sequence	Register Number	Data	Comment	Sequence	Register Number	Data	Comment
1	Power On			26	R76	01h	-
2	1ms min. wait.			27	R77	01h	-
3	Reset by the /RESET pin (Pin No. 8).			28	R80	00h	-
4	1ms min. wait after /RESET↑.			29	R81	00h	-
5	R3	01h	-	30	R82	24h	-
6	R1	00h	-	31	R83	A1h	-
7	R100	0Fh	-	32	R86	15h	-
8	R101	37h	-	33	R87	F0h	-
9	R102	3Dh	-	34	R95	3Fh	-
10	R103	04h	-	35	R96	22h	-
11	R104	00h	-	36	R25	76h	-
12	R105	30h	-	37	R26	54h	-
13	R106	84h	-	38	R27	6Bh	-
14	R107	05h	-	39	R28	60h	-
15	R108	17h	-	40	R29	04h	-
16	R109	62h	-	41	R30	1Ch	-
17	R110	50h	-	42	R31	A1h	-
18	R111	30h	-	43	R32	00h	-
19	R112	73h	-	44	R33	20h	-
20	R113	07h	-	45	R24	77h	-
21	R114	66h	-	46	30 μs min. wait.		
22	R115	51h	-	47	Data input start		
23	R116	50h	-	48	R59	01h	-
24	R2	40h	-	49	20 ms min. wait.		
25	R75	04h	-	50	R0	00h	-

□ Power On (At VCC=3.15V±0.15V)

Sequence	Register Number	Data	Comment	Sequence	Register Number	Data	Comment
1	Power On			26	R76	01h	-
2	1ms min. wait.			27	R77	01h	-
3	Reset by the /RESET pin (Pin No.8)			28	R80	00h	-
4	1ms min. wait after /RESET↑			29	R81	00h	-
5	R3	01h	-	30	R82	24h	-
6	R1	00h	-	31	R83	EBh	-
7	R100	0Fh	-	32	R86	15h	-
8	R101	37h	-	33	R87	F0h	-
9	R102	3Dh	-	34	R95	3Fh	-
10	R103	04h	-	35	R96	3Fh	-
11	R104	00h	-	36	R25	76h	-
12	R105	30h	-	37	R26	54h	-
13	R106	84h	-	38	R27	6Bh	-
14	R107	05h	-	39	R28	60h	-
15	R108	17h	-	40	R29	04h	-
16	R109	62h	-	41	R30	1Ch	-
17	R110	50h	-	42	R31	A1h	-
18	R111	30h	-	43	R32	00h	-
19	R112	73h	-	44	R33	20h	-
20	R113	07h	-	45	R24	77h	-
21	R114	66h	-	46	30 μs min. wait.		
22	R115	51h	-	47	Data input start		
23	R116	50h	-	48	R59	01h	-
24	R2	40h	-	49	20 ms min. wait.		
25	R75	04h	-	50	R0	00h	-



□ Power On (At VCC=3.3±0.15V)

Sequence	Register Number	Data	Comment	Sequence	Register Number	Data	Comment
1	Power On			26	R76	01h	-
2	1ms min. wait.			27	R77	01h	-
3	Reset by the /RESET pin (Pin No. 8).			28	R80	00h	-
4	1ms min. wait after /RESET↑.			29	R81	00h	-
5	R3	01h	-	30	R82	24h	-
6	R1	00h	-	31	R83	EBh	-
7	R100	0Fh	-	32	R86	15h	-
8	R101	37h	-	33	R87	F0h	-
9	R102	3Dh	-	34	R95	3Fh	-
10	R103	04h	-	35	R96	22h	-
11	R104	00h	-	36	R25	76h	-
12	R105	30h	-	37	R26	54h	-
13	R106	84h	-	38	R27	6Bh	-
14	R107	05h	-	39	R28	60h	-
15	R108	17h	-	40	R29	04h	-
16	R109	62h	-	41	R30	3Ch	-
17	R110	50h	-	42	R31	A1h	-
18	R111	30h	-	43	R32	00h	-
19	R112	73h	-	44	R33	20h	-
20	R113	07h	-	45	R24	77h	-
21	R114	66h	-	46	30 μs min. wait.		
22	R115	51h	-	47	Data input start		
23	R116	50h	-	48	R59	01h	-
24	R2	40h	-	49	20 ms min. wait.		
25	R75	04h	-	50	R0	00h	-



Power Off

Sequence	Register Number	Data	Comment
1	R0	08h	-
2	25 ms min. wait.		
3	R24	00h	-
4	20 ms min. wait.		
5	R1	08h	-
6	Data Off		
7	Power Off		



□ Standby

Sequence	Register Number	Data	Comment
1	R0	08h	-
2	25 ms min. wait.		
3	R24	00h	-
4	20 ms min. wait.		
5	R1	08h	-

Wake Up

Sequence	Register Number	Data	Comment
1	R1	00h	-
2	R24	FFh	-
3	30 μs min. wait.		
4	R0	00h	-

Note1: Be sure to perform reset by the /RESET pin (Pin No. 8) every power-on

Note2: Write the Register Data every power-on, because the data are not stored in the product.

Note3: Due to influence such as static electricity from the outside, data in the register may transform.
Data is recommended to be written in the register regularly.



4.5 INTERFACE PIN CONNECTIONS

CN1 (FPC)

Adaptable socket: FH23-45S-0.3SHW(05) (Hirose Electric Co., Ltd.(HRS))

Pin No.	Symbols	Functions	Pin No.	Symbols	Functions
1	GND	Ground Note1	25	R0	Red data (LSB)
2	GND	Ground Note1	26	R1	Red data
3	VCC	Power supply Note1	27	R2	Red data
4	VCC		28	R3	Red data
5	VCC		29	R4	Red data
6	VCC		30	R5	Red data (MSB)
7	GND	Ground Note1	31	GND	Ground Note1
8	/RESET	Reset	32	SCL	Serial clock
9	HSYNC	Horizontal synchronous signal	33	SI	Serial input
10	VSYNC	Vertical synchronous signal	34	RSVD	Keep this pin Open.
11	CLK	Dot clock	35	/CS	Chip selection
12	GND	Ground Note1	36	VCOMIN	COM high voltage input
13	B0	Blue data (LSB)	37	N.C.	Keep this pin Open.
14	B1	Blue data	38	GND	Ground Note1
15	B2	Blue data	39	N.C.	Keep this pin Open.
16	B3	Blue data	40	N.C.	Keep this pin Open.
17	B4	Blue data	41	N.C.	Keep this pin Open.
18	B5	Blue data (MSB)	42	N.C.	Keep this pin Open.
19	G0	Green data (LSB)	43	GND	Ground Note1
20	G1	Green data	44	ANODE	LED voltage (Anode)
21	G2	Green data	45	CATHODE	LED voltage (Cathode)
22	G3	Green data			
23	G4	Green data			
24	G5	Green data (MSB)			

Description of terminals

Terminals	Description
/RESET	When /RESET is L, an internal reset is performed. The reset operation is executed at the /RESET signal level. Be sure to perform reset via this pin at power application.
/CS	This pin is used for chip select signals. When /CS= L, the chip is active and can perform data I/O operations including command and data I/O.
SCL	This pin is clock input of serial interface.
SI	This pin is data input of serial interface.
VCOMIN	This pin is the Common high voltage. The voltage needs to be adjusted. The details are explained the above. See " 3 BLOCK DIAGRAM - Reference design of COM circuit ".
ANODE, CATHODE	Refer to the below " Circuits of backlight ".



Circuits of backlight


4.6 DISPLAY COLORS AND INPUT DATA SIGNALS

This product can display in equivalent to 262,144 colors in 64 gray scales. Also the relation between display colors and input data signals is as the following table.

Display colors		Data signal (0: Low level, 1: High level)																	
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red gray scale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	dark	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑				:					:						:			
	↓				:					:						:			
	bright	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
Green gray scale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	dark	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	↑				:					:						:			
	↓				:					:						:			
	bright	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
Blue gray scale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	↑				:					:						:			
	↓				:					:						:			
	bright	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
Blue gray scale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	dark	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	↑				:					:						:			
	↓				:					:						:			
	bright	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	


4.7 DISPLAY POSITIONS

The following table is the coordinates per pixel (See figure of "4.8 SCANNING DIRECTIONS".).

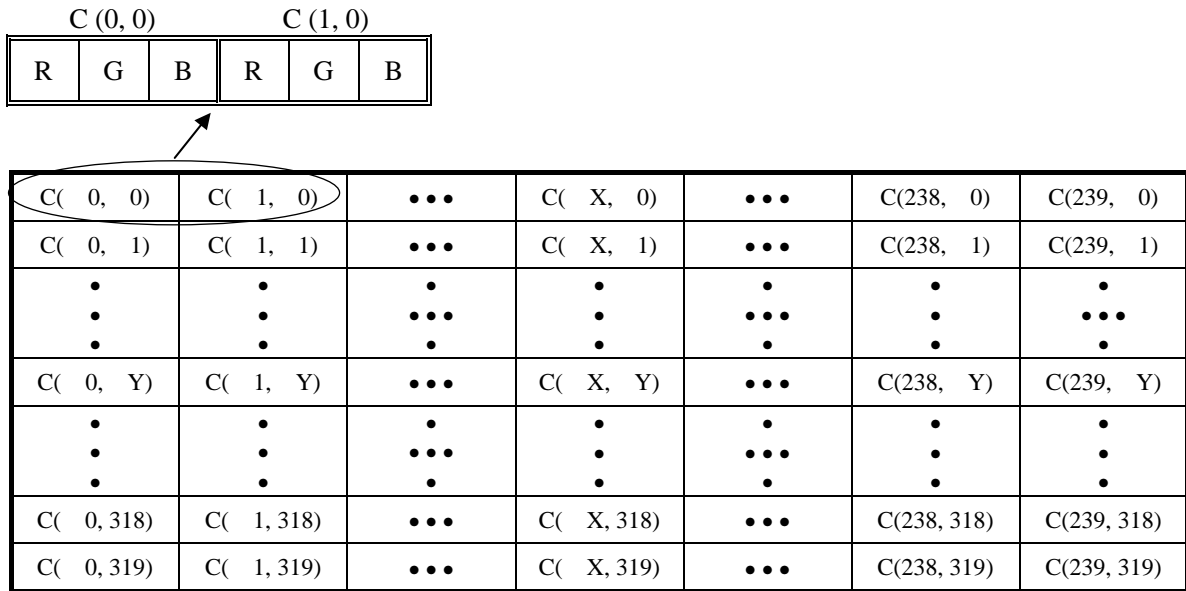

4.8 SCANNING DIRECTIONS

The following figures are seen from a front view. Also the arrow shows the direction of scan.

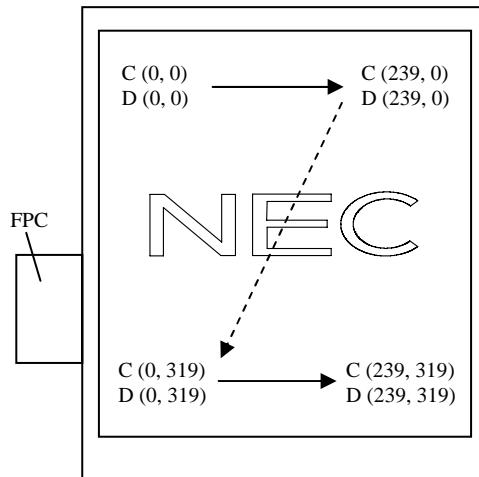

Note1: Meaning of C (X, Y) and D (X, Y)

C (X, Y): The coordinates of the display position (See "4.7 DISPLAY POSITIONS".)

D (X, Y): The data number of input signal for LCD panel

4.9 INPUT SIGNAL TIMINGS

4.9.1 RGB interface (Ta= 25°C, VCC= 3.0V)

(1) Timing characteristics

Parameter		Symbol	min.	typ.	max.	Unit	Remarks	
CLK	Frequency	1/tc	4.81	5.0	5.12	MHz	200ns (typ.)	
	Duty	tcd	0.4	0.5	0.6	-	-	
	Rise time, Fall time	trcf	-	-	15	ns	-	
DATA (G0-5) (B0-5) (R0-5)	CLK-DATA	Setup time	tds	15	-	-	ns	-
		Hold time	tdh	15	-	-	ns	
	Rise time, Fall time	tdrf	-	-	15	ns		
HSYNC	Cycle	th	50.0	51.2	53.2	μs	19.53kHz (typ.)	
			256			CLK	-	
	Display period	thd	240			CLK		
	Front-porch	thf	4			CLK		
	Pulse width	thp	2	8	-	CLK		
	Back-porch	thb	4			CLK		
	CLK- HSYNC	Setup time	ths	15	-	-		ns
		Hold time	thh	15	-	-		ns
Rise time, Fall time	thrf	-	-	15	ns			
VSYNC	Cycle	tv	16.2	16.59	17.24	ms	60Hz (typ.)	
			324			H	-	
	Display period	tvd	320			H		
	Front-porch	tvf	1			H		
	Pulse width	tvp	1	2	-	H		
	Back-porch	tvb	1			H		
	VSYNC-HSYNC timing	tvh	15	-	-	ns		
Rise time, Fall time	tvrf	-	-	15	ns			


Note1: Definition of parameters is as follows.

tc= 1CLK, tcd= tch/tc, th= 1H



Note2: All parameters should be kept within the specified range.



(2) Input signal timing chart

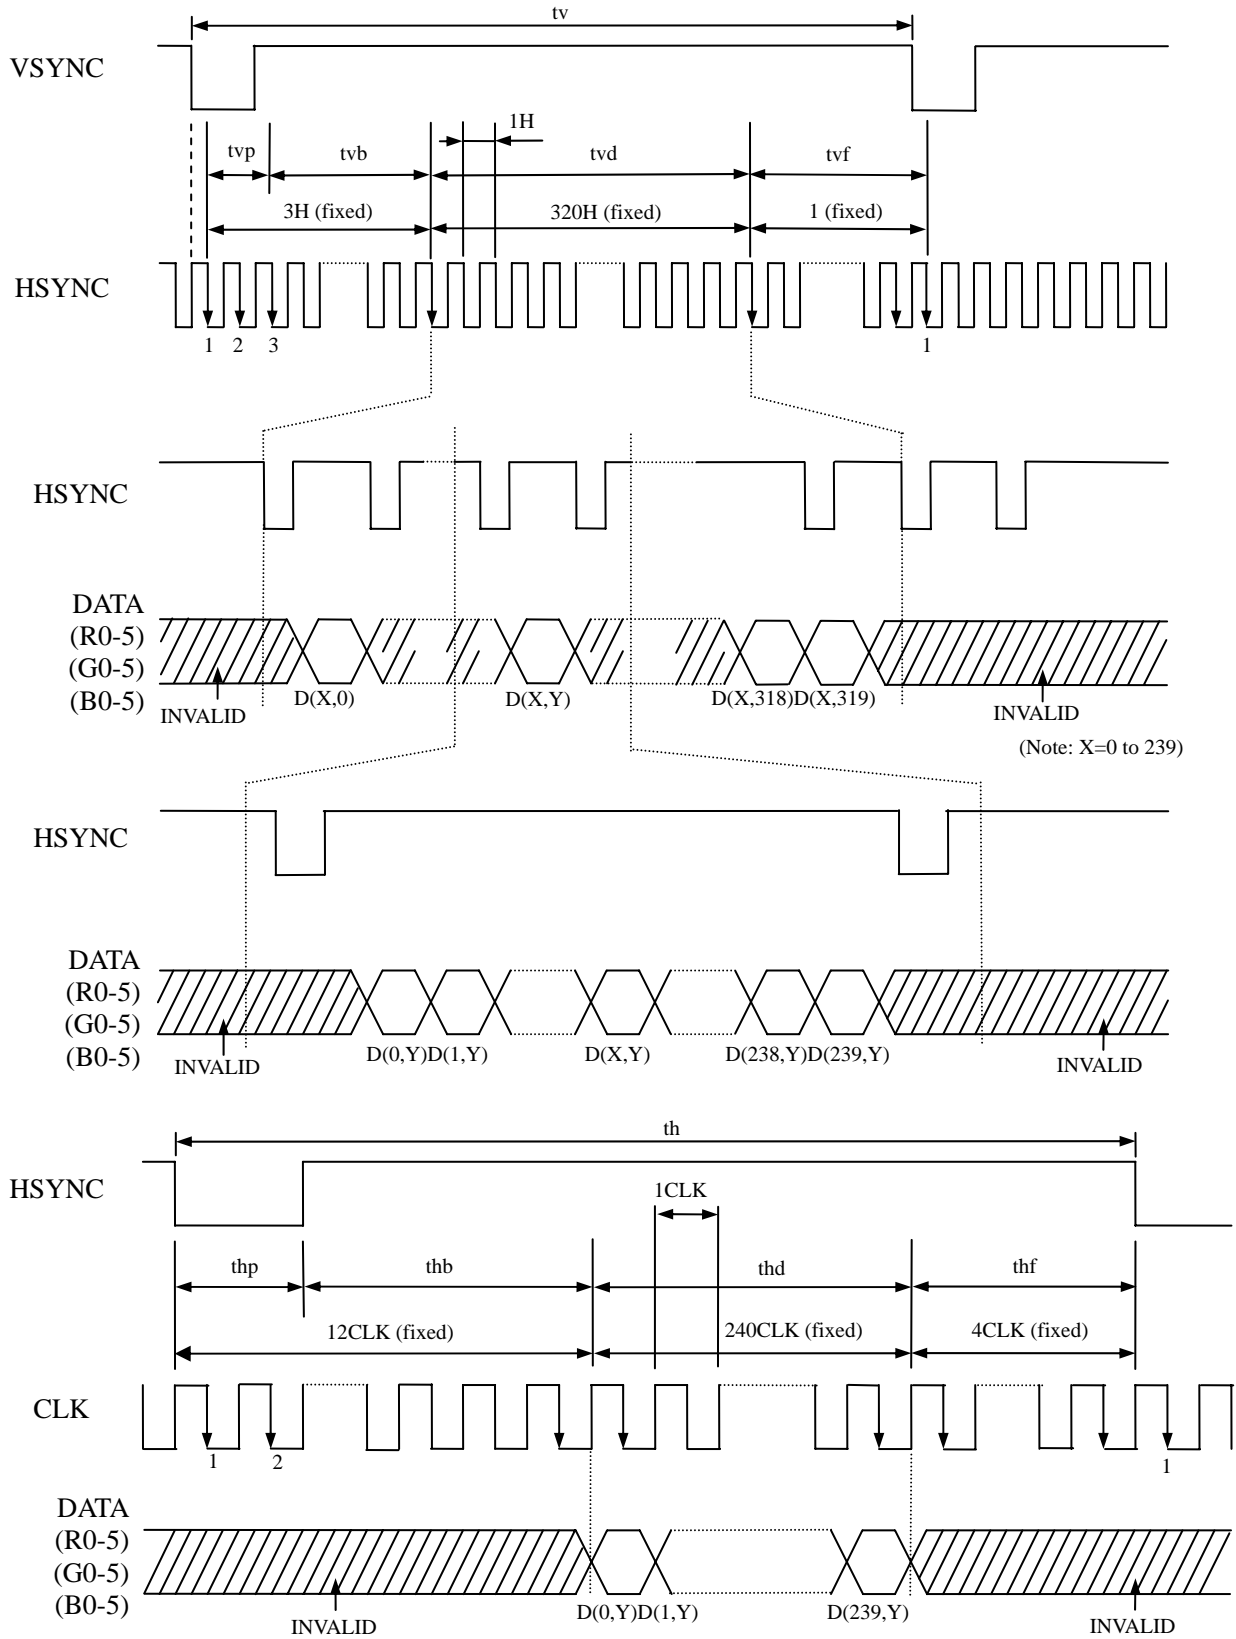

Note1: Unless otherwise specified, the input level is defined to be $V_{IH} = 0.8V_{CC}$, $V_{IL} = 0.2V_{CC}$.

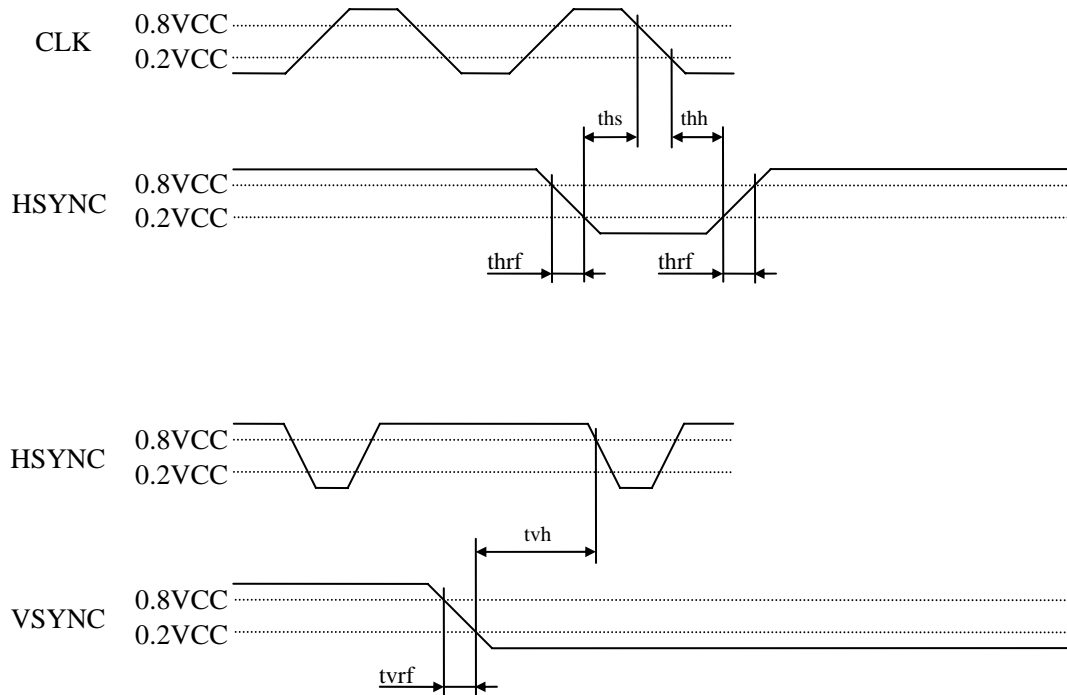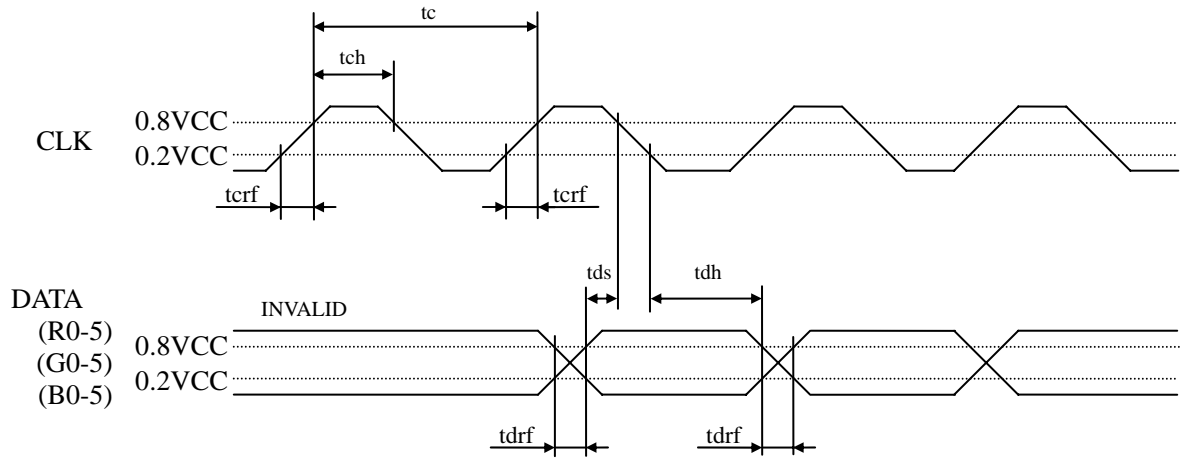


Note1: Unless otherwise specified, the input level is defined to be $V_{IH} = 0.8V_{CC}$, $V_{IL} = 0.2V_{CC}$.

4.9.2 Serial interface (Ta= 25°C, VCC= 3.0V)

(1) Timing characteristics

Parameter	Symbol	Condition	min.	typ.	max.	Unit	Remarks
Serial clock cycle	tSCYC	READ	450	-	-	ns	-
		WRITE	100	-	-	ns	-
SCL high level pulse width	tSHW	READ	210	-	-	ns	-
		WRITE	40	-	-	ns	-
SCL low level pulse width	tSLW	READ	210	-	-	ns	-
		WRITE	40	-	-	ns	-
/CS rise time, fall time	tcsrf	/CS	-	-	15	ns	-
SCL rise time, fall time	tscrf	SCL	-	-	15	ns	-
SI rise time, fall time	tsirf	SI	-	-	15	ns	-
/CS setup time	tCSS	/CS	50	-	-	ns	-
/CS hold time	tCSH	/CS	30	-	-	ns	-
Data setup time	tSDS	SI	30	-	-	ns	-
Data hold time	tSDH	SI	15	-	-	ns	-
Reset pulse width	tRW	/RESET	2	-	-	μs	-
/RESET↑ to /CS time	tRCS	/RESET↑ to /CS	1	-	-	ms	-

Note1: All parameters should be kept within the specified range.

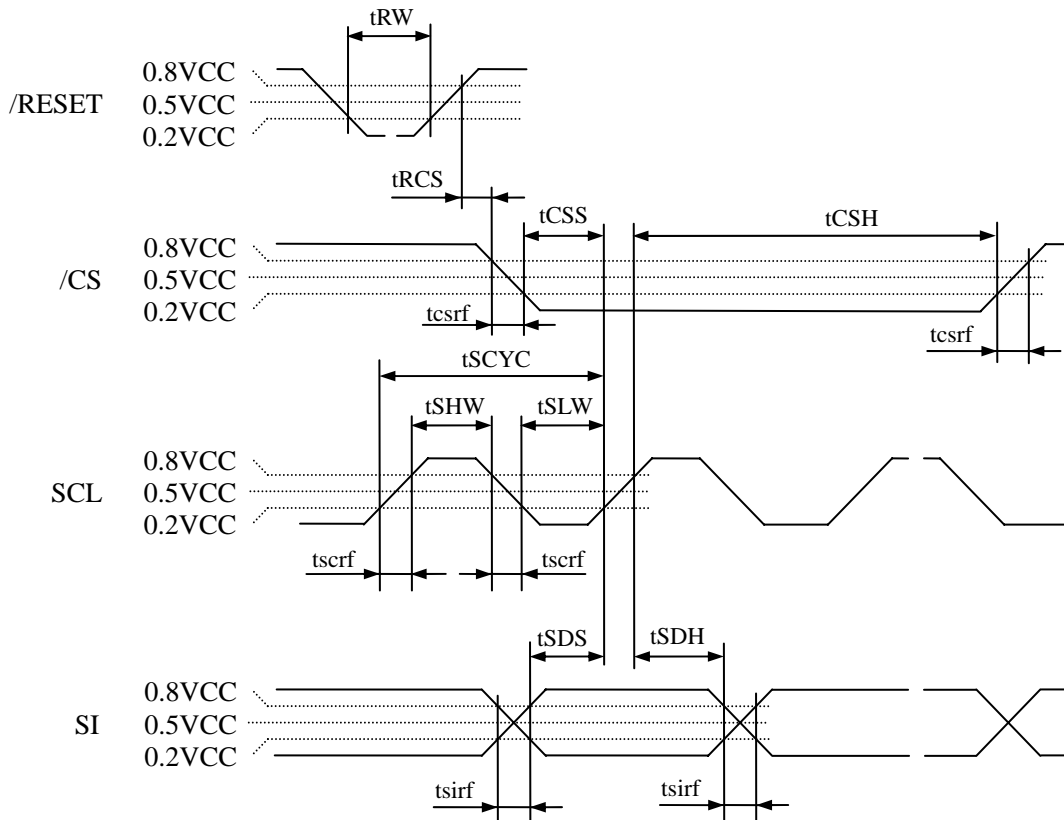

Note2: Unless otherwise specified, the input level is defined to be VIH= 0.8VCC, VIL= 0.2VCC.

4.10 OPTICAL CHARACTERISTICS

<Backlight turned ON>

(Note1, Note2, Note3)

Parameter	Condition	Symbol	min.	typ.	max.	Unit	Remarks
Luminance	White at center $\theta R=0^\circ, \theta L=0^\circ, \theta U=0^\circ, \theta D=0^\circ$	L	350	550	-	cd/m ²	-
Contrast ratio	White/Black at center $\theta R=0^\circ, \theta L=0^\circ, \theta U=0^\circ, \theta D=0^\circ$	CR	250	400	-	-	Note4
Luminance uniformity	White $\theta R=0^\circ, \theta L=0^\circ, \theta U=0^\circ, \theta D=0^\circ$ Maximum luminance: 100%	LU	70	85	-	%	Note8

Reference data

(Note1, Note2, Note3)


Parameter	Condition	Symbol	min.	typ.	max.	Unit	Remarks	
Chromaticity coordinates	White	Wx	0.27	0.32	0.37	-	Note5	
		Wy	0.29	0.34	0.39	-		
Color gamut	$\theta R=0^\circ, \theta L=0^\circ, \theta U=0^\circ, \theta D=0^\circ$ at center, against NTSC color space	C	-	50	-	%		
Response time	White to black	90% → 10%	Ton	-	8	16	ms	Note6 Note7
	Black to white	10% → 90%	Toff	-	15	30		
Viewing angle	Right	$\theta U=0^\circ, \theta D=0^\circ, CR \geq 5$	θR	-	50	-	°	-
	Left	$\theta U=0^\circ, \theta D=0^\circ, CR \geq 5$	θL	-	50	-	°	
	Up	$\theta R=0^\circ, \theta L=0^\circ, CR \geq 5$	θU	-	60	-	°	
	Down	$\theta R=0^\circ, \theta L=0^\circ, CR \geq 5$	θD	-	30	-	°	

Note1: Measurement conditions are as follows.


Ta= 25°C, VCC= 3.0V, IL= 18mA



Note2: Definition of viewing angles

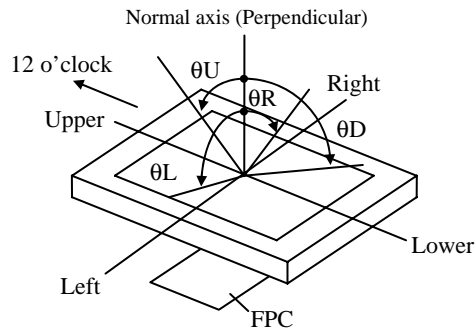

Note3: Luminance, Contrast ratio, Chromaticity coordinates and Color gamut are measured as follows.

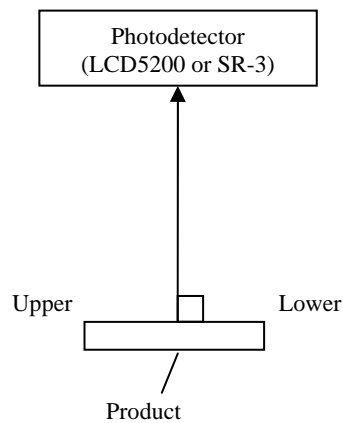

Note4: Definition of contrast ratio


The contrast ratio is calculated by using the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance of white screen}}{\text{Luminance of black screen}}$$

Note5: The White chromaticity coordinates are deviated by the LED deviation in addition to color filter deviation.

Note6: Definition of response times

Response time is measured, the luminance changes from "white" to "black", or "black" to "white" on the same screen point, by photo-detector. Ton is the time it takes the luminance change from 90% down to 10%. Also Toff is the time it takes the luminance change from 10% up to 90% (See the following diagram.).

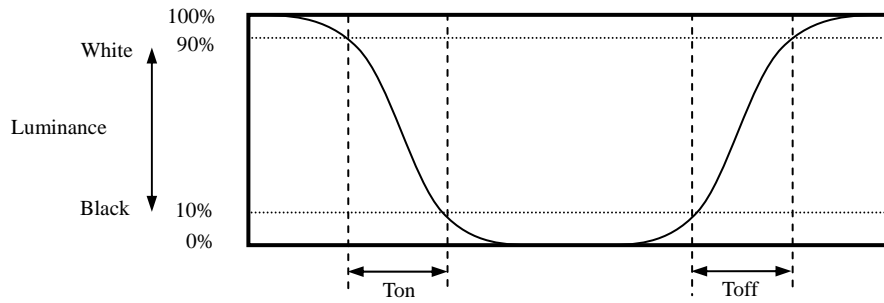


Note7: Product surface temperature: Top= 25°C

Note8: Definition of luminance uniformity

Luminance uniformity is calculated by using the following formula.

$$\text{Luminance uniformity (LU)} = \frac{\text{Minimum luminance from A to I}}{\text{Maximum luminance from A to I}} \times 100$$

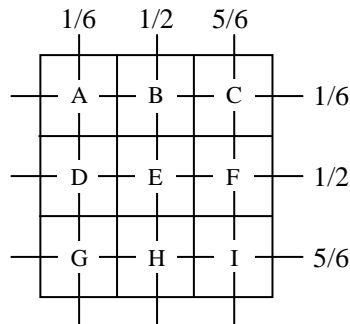

5. RELIABILITY TESTS


Test item	Condition	Judgment Note1
High temperature and humidity (Operation)	<ul style="list-style-type: none"> □ 55 ± 2°C, RH = 85%, 240 hours □ Display data is black. 	No display malfunctions
Heat cycle (Operation)	<ul style="list-style-type: none"> □ -20 ± 3°C...1 hour □ 70 ± 3°C...1 hour □ 50 cycles, 4 hours/cycle □ Display data is black. 	
Thermal shock (Non operation)	<ul style="list-style-type: none"> □ -30 ± 3°C...30 minutes □ 80 ± 3°C...30 minutes □ 100 cycles, 1 hour/cycle □ Temperature transition time is within 5 minutes. 	
Low pressure (Non operation)	<ul style="list-style-type: none"> □ 15kPa □ -30 ± 3°C...24 hours □ 80 ± 3°C...24 hours 	
Low pressure (Operation)	<ul style="list-style-type: none"> □ 53.3 kPa □ -20 ± 3°C...24 hours □ 70 ± 3°C...24 hours 	
ESD (Operation)	<ul style="list-style-type: none"> □ 150pF, 150Ω, ±10kV □ 3 places on a panel surface □ 10 times each places at 1 sec interval 	
Dust (Operation)	<ul style="list-style-type: none"> □ Sample dust: No. 15 (by JIS-Z8901) □ 15 seconds stir □ 8 times repeat at 1 hour interval 	
Vibration (Operation)	<ul style="list-style-type: none"> □ 30 to 100Hz, 19.6m/s² □ 30 minutes/cycle □ X, Y, Z directions □ 1 times each directions 	
Mechanical shock (Non operation)	<ul style="list-style-type: none"> □ 3,920m/ s², 2.5ms □ ±X, ±Y, ±Z directions □ 1 times each directions 	

Note1: Display and appearance are checked under environmental conditions equivalent to the inspection conditions of defect specifications.

6. PRECAUTIONS


6.1 MEANING OF CAUTION SIGNS

The following caution signs have very important meaning. **Be sure to read "6.2 CAUTIONS" and "6.3 ATTENTIONS", after understanding these contents!**




This sign has the meaning that customer will be injured by himself or the product will sustain a damage, if customer has wrong operations.





This sign has the meaning that customer will be injured by himself, if customer has wrong operations.

6.2 CAUTIONS



- * **Do not touch the working backlight. There is a danger of burn injury.**
- * **Do not shock and press the LCD panel and the backlight! There is a danger of breaking, because they are made of glass. (Shock: To be not greater 3,920m/s² and to be not greater 2.5ms)**



6.3 ATTENTIONS 

6.3.1 Handling of the product

- Take hold of both ends without touching the FPC when the product (LCD module) is picked up from the tray.
Do not hook nor pull the FPC in order to avoid any damage.
- When the product is put on the table temporarily, display surface must be placed downward.
When handling the product, take the measures of electrostatic discharge with such as earth band, ionic shower and so on, because the product may be damaged by electrostatic.
- The product must be installed and/or handled without any stress such as bends or twist. Bends, twist or any stress to any portion may cause display failures. And also do not put heavy or hard materials on the product.
Do not hit or rub the surface of panel with hard materials, because it is easily scratched. (Polarizer pencil-hardness: 3H)
- When cleaning the panel surface, wipe it with a soft dry cloth.
Do not push nor pull the FPC while the product is working.
- Do not fold the FPC. When folding the FPC, pattern disconnection may occur. In case of bending FPC, the minimum curvature (R) must be more than 1.0 mm.
When installing the product, do not contact a conductor such as a metal to the FPC excluding the terminal area. There is a risk of short circuit which is caused by breakage of insulation layer of the FPC.
- When installing the product, apply the waterproof design to avoid going of water into the product. Usually liquid crystals don't leak through the breakage of glasses because of the surface tension of thin layer and the construction of LCD panel. But, if you contact with liquid crystal for the worst, please wash it out with soap.



6.3.2 Environment

- Do not operate or store in high temperature, high humidity, dewdrop atmosphere or corrosive gases. Keep the product in packing box with antistatic pouch in room temperature to avoid for dusts and sunlight, when storing the product.
In order to prevent dew condensation occurring by temperature difference, the product packing box should be opened after enough time being left under the environment of an unpacking room. Evaluate the leaving time sufficiently because a situation of dew condensation occurring is changed by the environmental temperature and humidity. (Recommended leaving time: 6 hours or more with packing state)
- Do not operate in high magnetic field. Circuits may be broken down by it.
This product is not designed as radiation hardened.

6.3.3 Characteristics

The following items are neither defects nor failures.

- Response time, luminance and color may be changed by ambient temperature.
Display mura, flicker, vertical seam or small spot may be observed depending on display patterns.
- Do not display the fixed pattern for a long time because it may cause image sticking.
Optical characteristics may be changed depending on input signal timings.

6.3.4 Other

- All GND terminals should be used without any non-connected lines.
Do not disassemble the product.
- Pack the product with original shipping package, in order to avoid any damages during transportation, when returning the product to NEC.
When installing the product to customer equipment, do not apply any stress to the rear side of the product, FPC, A area, Soldering Area and Mounting Area. If not, it may cause display un-uniformity or LCD panel separation or break down of the product.
- The information of China RoHS directive six hazardous substances or elements in this product is as follows.

China RoHS directive six hazardous substances or elements					
Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr VI)	Polybrominated Biphenyls (PBB)	Polybrominated Biphenyl Ethers (PBDE)
□	□	□	□	□	□

Note1: □ : This indicates that the poisonous or harmful material in all the homogeneous materials for this part is equal or below the limitation level of SJ/T11363-2006 standard regulation.

□ : This indicates that the poisonous or harmful material in all the homogeneous materials for this part is above the limitation level of SJ/T11363-2006 standard regulation.



7. OUTLINE DRAWINGS

Pin No.	Symbols	Pin No.	Symbols
1	GND	25	R0
2	GND	26	R1

Unit: mm