

品名 Type No.	絶対最大定格 Absolute Maximum Ratings										電気的・熱的特性 Electrical Characteristics						外形 No. Outline No.
	V _{DRM} [V]	I _T [A]	条件 T _a [°C]	I _{TSM} [A]	条件 [μS]	dl/dt [A/μS]	dV/dt [kV/μS]	P _T [W]	条件 T _J [°C]	T _{stg} [°C]	T _J [°C]	V _{BO} [V]	I _{ORM} (max) [μA]	条件 V _D [V]	I _H (min) [mA]	C _J (max) [pF]	
KP4-5	40	1	40	40	10× 1000	50	1.5	2	95	-40~+125	+125	50~60	10	40	50	200	15
-8	70											75~98	10	70	95	150	15

Fig 5

品名 Type No.	絶対最大定格 Absolute Maximum Rating							電気的・熱的特性 Electrical Characteristics										外形 No. Outline No.				
	V _{DRM} [V]	I _{TSM} [A]	条件 [μS]	dV/dt [kV/μS]	T _{stg} [°C]	T _J [°C]	T _{opr} [°C]	V _{BO} [V]	I _{ORM} (max) [μA]	条件 V _D [V]	I _H (min) [mA]	C _J (max) [pF]	条件 V _o f [V] [kHz]		ΔC _{J1} (max) [pF]	条件 V _o f [V] [kHz]			ΔC _{J2} (max) [pF]	条件 V _o f [V] [kHz]		
NP10014	120	150	10×200	1.5	-40~+125	+125	-30~+60	125~160	5	120	94	100*	0	100	10*	0	100	6*	30	100	30	100

*参考値 Reference value

DataSheet4U.com

DataSheet4U.com

外形図 Outline Dimensions

[Unit : mm]

Fig. 5


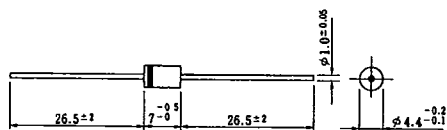


Fig. 6

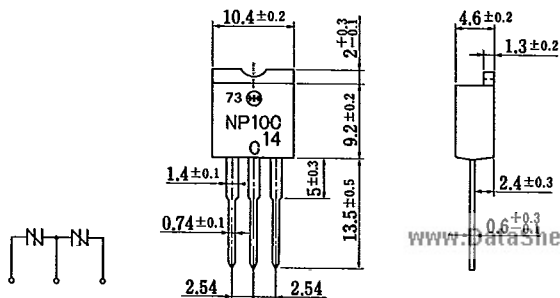

DataSheet4U.com

www.DataSheet4U.com