

# NTHD4401P

## Power MOSFET

-20 V, -3.0 A, Dual P-Channel, ChipFET™

### Features

- Low  $R_{DS(on)}$  and Fast Switching Speed in a ChipFET Package
- Leadless ChipFET Package 40% Smaller Footprint than TSOP-6
- ChipFET Package with Excellent Thermal Capabilities where Heat Transfer is Required
- Pb-Free Package is Available

### Applications

- Charge Control in Battery Chargers
- Optimized for Battery and Load Management Applications in Portable Equipment
- MP3 Players, Cell Phones, Digital Cameras, PDAs
- Buck and Boost DC-DC Converters

### MAXIMUM RATINGS (T<sub>J</sub> = 25°C unless otherwise noted)

Rating			Symbol	Value	Unit	
Drain-to-Source Voltage			V <sub>DSS</sub>	-20	V	
Gate-to-Source Voltage			V <sub>GS</sub>	±12	V	
Continuous Drain Current (Note 1)	Steady State	T <sub>A</sub> = 25°C	I <sub>D</sub>	-2.1	A	
		T <sub>A</sub> = 85°C		-1.5		
	t ≤ 5 s	T <sub>A</sub> = 25°C	-3.0			
Power Dissipation (Note 1)	Steady State	T <sub>A</sub> = 25°C	P <sub>D</sub>	1.1	W	
		T <sub>A</sub> = 85°C		0.6		
	t ≤ 5 s	T <sub>A</sub> = 25°C	2.1			
Pulsed Drain Current			tp = 10 μs	I <sub>DM</sub>	-9.0	A
Operating Junction and Storage Temperature			T <sub>J</sub> , T <sub>stg</sub>	-55 to 150	°C	
Source Current (Body Diode)			I <sub>S</sub>	-2.5	A	
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			T <sub>L</sub>	260	°C	

### THERMAL RESISTANCE RATINGS

Rating	Symbol	Value	Unit
Junction-to-Ambient - Steady State (Note 1)	R <sub>θJA</sub>	110	°C/W
Junction-to-Ambient - t ≤ 5 s		60	

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.


1. Surface Mounted on FR4 Board using 1 in sq pad size (Cu area = 1.27 in sq [1 oz] including traces).




ON Semiconductor®

<http://onsemi.com>


V <sub>(BR)DSS</sub>	R <sub>DS(on)</sub> TYP	I <sub>D</sub> MAX
-20 V	130 mΩ @ -4.5 V	-3.0 A
	200 mΩ @ -2.5 V	



P-Channel MOSFET




P-Channel MOSFET




ChipFET  
CASE 1206A  
STYLE 2

### PIN CONNECTIONS



### MARKING DIAGRAM



- C4 = Specific Device Code
- M = Month Code
- = Pb-Free Package

### ORDERING INFORMATION

Device	Package	Shipping†
NTHD4401PT1	ChipFET	3000/Tape & Reel
NTHD4401PT1G	ChipFET (Pb-Free)	3000/Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# NTHD4401P

## ELECTRICAL CHARACTERISTICS (T<sub>J</sub> = 25°C unless otherwise noted)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
----------------	--------	----------------	-----	-----	-----	------

### OFF CHARACTERISTICS

Drain-to-Source Breakdown Voltage	V <sub>(Br)DSS</sub>	V <sub>GS</sub> = 0 V, I <sub>D</sub> = -250 μA	-20	-23		V
Drain-to-Source Breakdown Voltage Temperature Coefficient	V <sub>(Br)DSS</sub> /T <sub>J</sub>			-8.0		mV/°C
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>GS</sub> = 0 V, T <sub>J</sub> = 25°C			-1.0	μA
		V <sub>DS</sub> = -16 V, T <sub>J</sub> = 85°C			-5.0	
Gate-to-Source Leakage Current	I <sub>GSS</sub>	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ±12 V			±100	nA

### ON CHARACTERISTICS (Note 2)

Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>GS</sub> = V <sub>DS</sub> , I <sub>D</sub> = -250 μA	-0.6	-0.75	-1.2	V
Gate Threshold Temperature Coefficient	V <sub>GS(th)</sub> /T <sub>J</sub>			2.65		mV/°C
Drain-to-Source On Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> = -4.5 V, I <sub>D</sub> = -2.1 A V <sub>GS</sub> = -2.5 V, I <sub>D</sub> = -1.7 A V <sub>GS</sub> = -1.8 V, I <sub>D</sub> = -1.0 A		0.130 0.200 0.34	0.155 0.240	Ω
Forward Transconductance	g <sub>FS</sub>	V <sub>DS</sub> = -10 V, I <sub>D</sub> = -2.1 A		5.0		S

### CHARGES, CAPACITANCES AND GATE RESISTANCE

Input Capacitance	C <sub>iss</sub>	V <sub>GS</sub> = 0 V, f = 1.0 MHz, V <sub>DS</sub> = -10 V		185	300	pF
Output Capacitance	C <sub>oss</sub>			95	150	
Reverse Transfer Capacitance	C <sub>rss</sub>			30	50	
Total Gate Charge	Q <sub>G(TOT)</sub>	V <sub>GS</sub> = -4.5 V, V <sub>DS</sub> = -10 V, I <sub>D</sub> = -2.1 A		3.0	6.0	nC
Threshold Gate Charge	Q <sub>G(TH)</sub>			0.2		
Gate-to-Source Charge	Q <sub>GS</sub>			0.5		
Gate-to-Drain Charge	Q <sub>GD</sub>			0.9		

### SWITCHING CHARACTERISTICS (Note 3)

Turn-On Delay Time	t <sub>d(on)</sub>	V <sub>GS</sub> = -4.5 V, V <sub>DD</sub> = -16 V, I <sub>D</sub> = -2.1 A, R <sub>G</sub> = 2.5 Ω		7.0	12	ns
Rise Time	t <sub>r</sub>			13	25	
Turn-Off Delay Time	t <sub>d(off)</sub>			33	50	
Fall Time	t <sub>f</sub>			27	40	

### DRAIN-SOURCE DIODE CHARACTERISTICS

Forward Diode Voltage	V <sub>SD</sub>	V <sub>GS</sub> = 0 V I <sub>S</sub> = -2.5 A		-0.85	-1.15	V
Reverse Recovery Time	t <sub>rr</sub>	V <sub>GS</sub> = 0 V, dI <sub>S</sub> /dt = 90 A/μs, I <sub>S</sub> = -2.1 A		32		ns
Charge Time	t <sub>a</sub>			10		
Discharge Time	t <sub>b</sub>			22		
Reverse Recovery Charge	Q <sub>RR</sub>			15		nC

2. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

3. Switching characteristics are independent of operating junction temperatures.

TYPICAL PERFORMANCE CURVES ( $T_J = 25^\circ\text{C}$  unless otherwise noted)

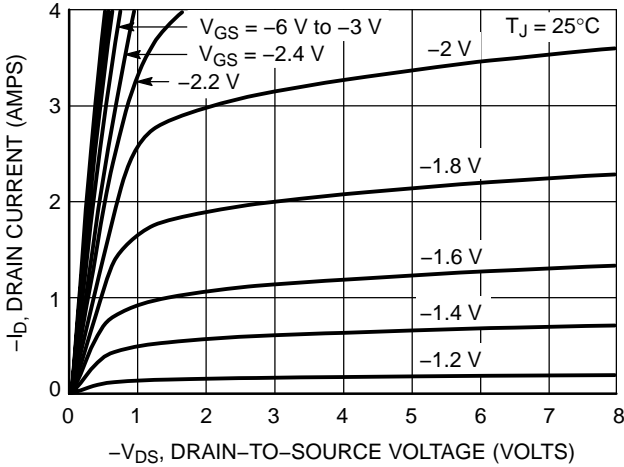


Figure 1. On-Region Characteristics

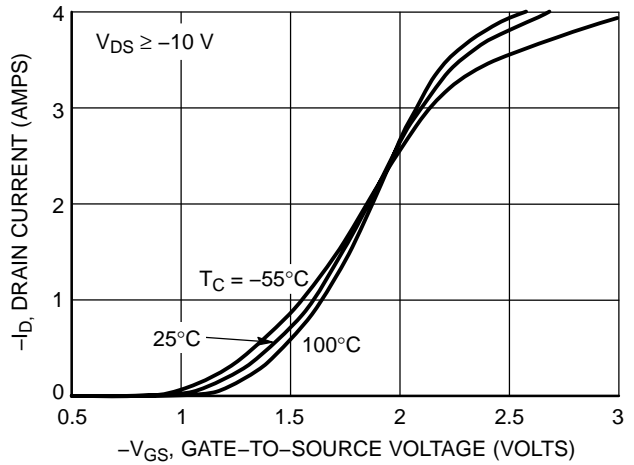


Figure 2. Transfer Characteristics

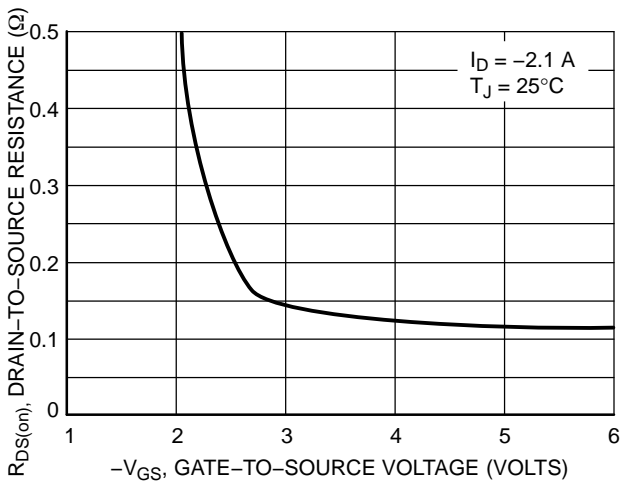


Figure 3. On-Resistance vs. Gate-to-Source Voltage

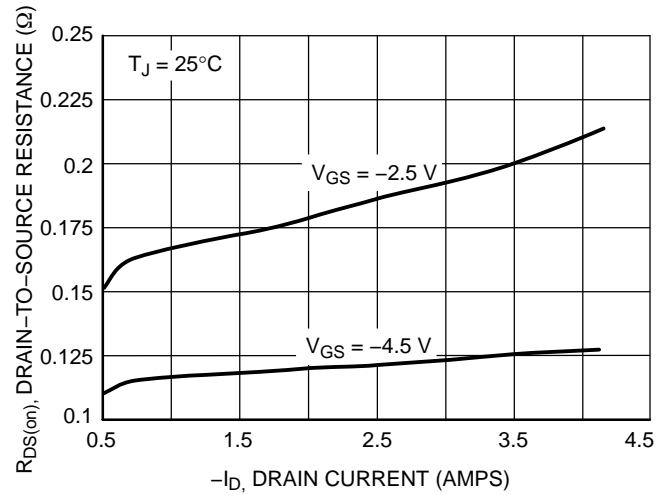


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

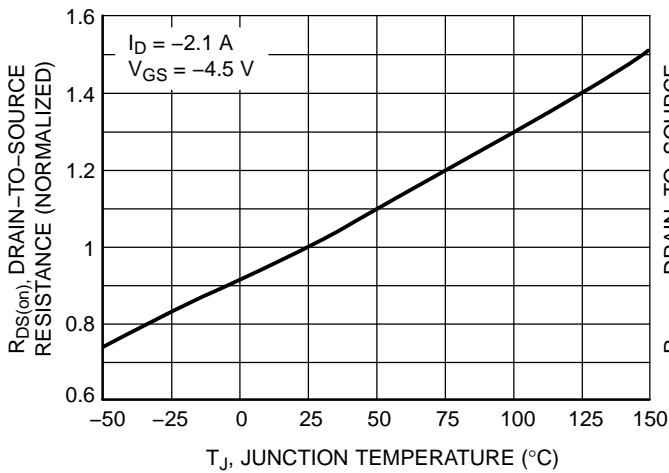


Figure 5. On-Resistance Variation with Temperature


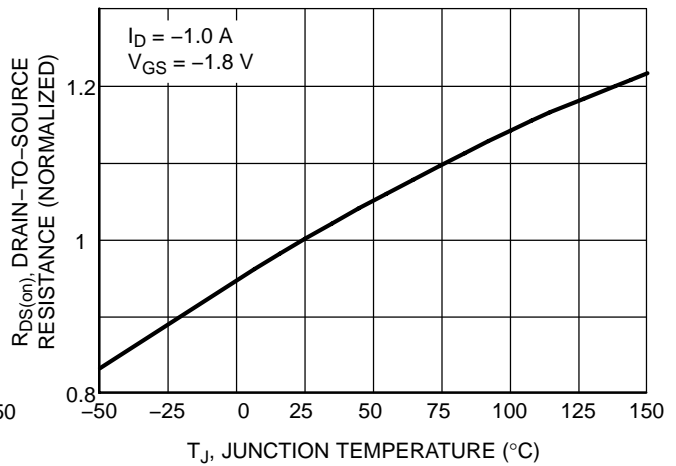



Figure 6. On-Resistance Variation with Temperature

# NTHD4401P


## TYPICAL PERFORMANCE CURVES ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

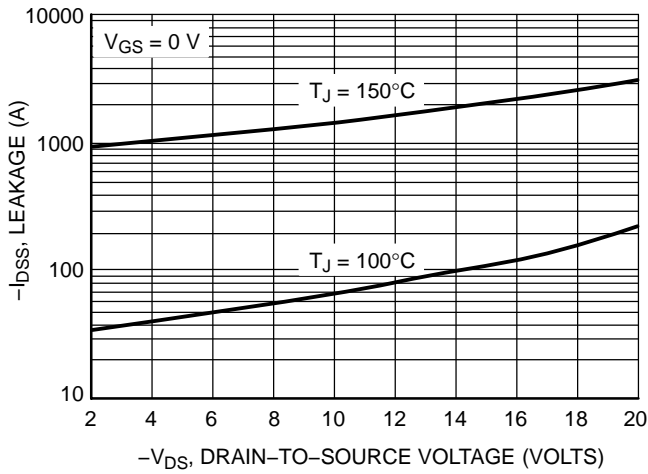


**Figure 7. Drain-to-Source Leakage Current vs. Voltage**

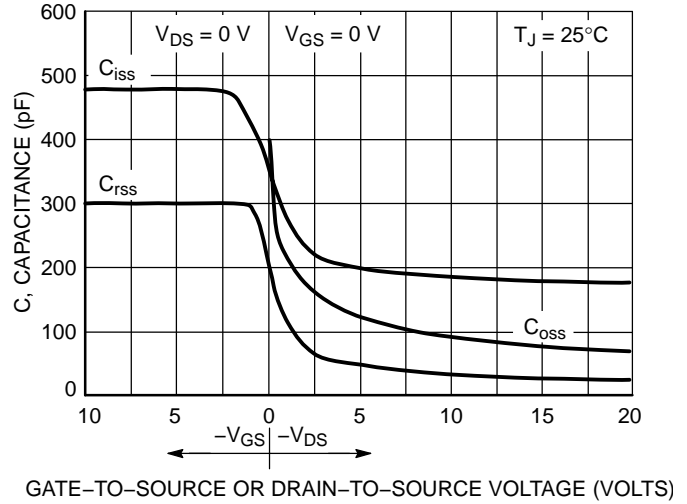


**Figure 8. Capacitance Variation**

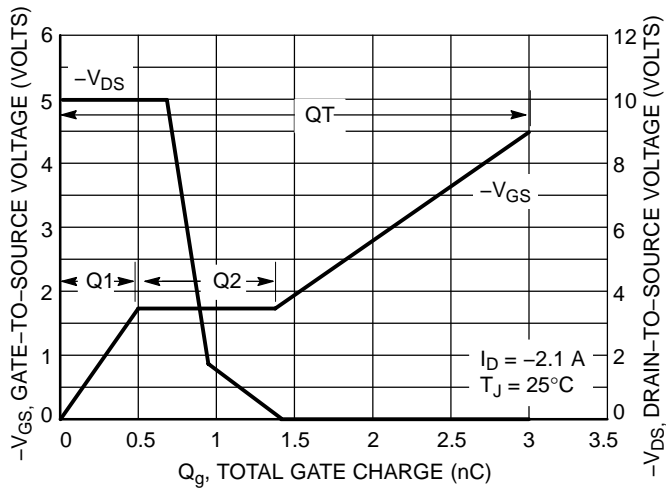

**Figure 9. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge**

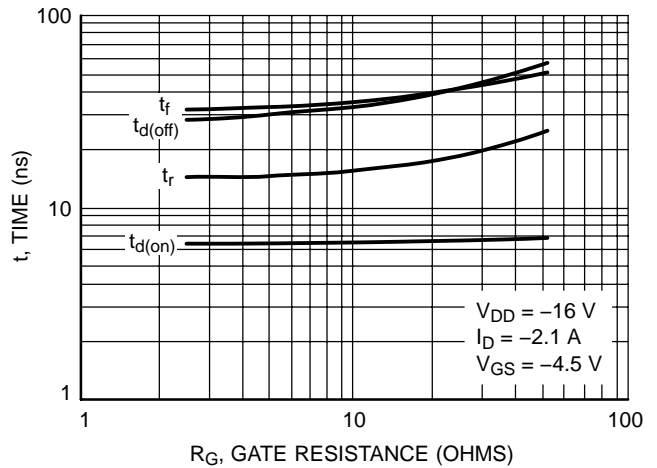

**Figure 10. Resistive Switching Time Variation vs. Gate Resistance**

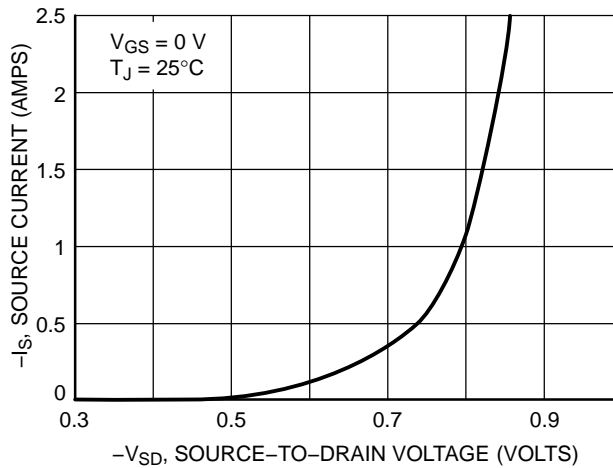

**Figure 11. Diode Forward Voltage vs. Current**

# NTHD4401P

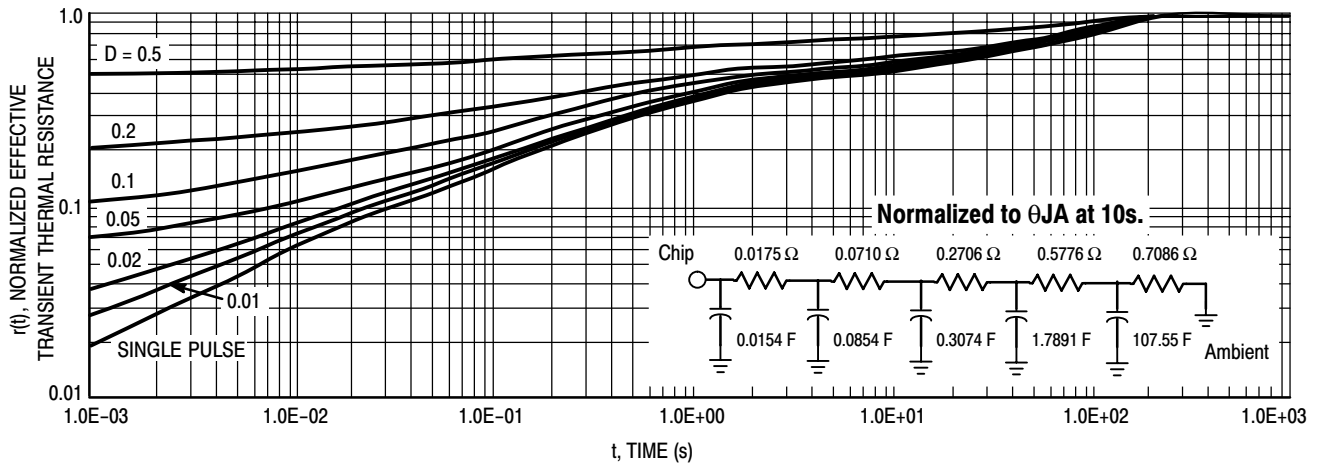


Figure 12. Thermal Response

## SOLDERING FOOTPRINT\*

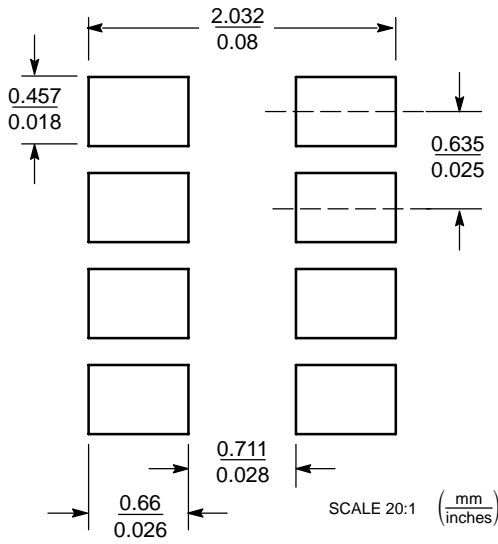


Figure 13. Basic

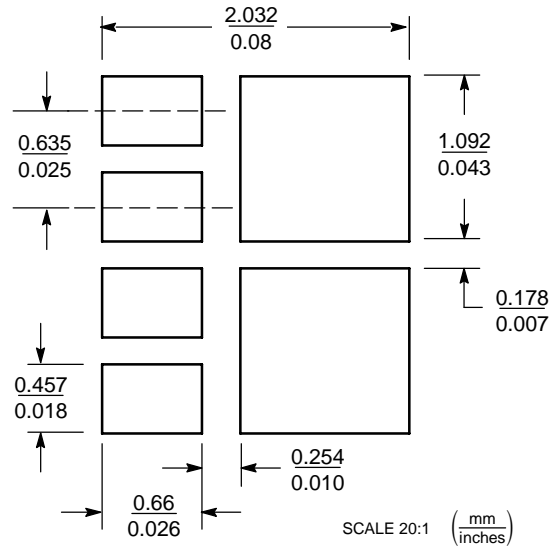


Figure 14. Style 2

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## BASIC PAD PATTERNS

The basic pad layout with dimensions is shown in Figure 13. This is sufficient for low power dissipation MOSFET applications, but power semiconductor performance requires a greater copper pad area, particularly for the drain leads.


The minimum recommended pad pattern shown in Figure 14 improves the thermal area of the drain connections (pins 5, 6, 7, 8) while remaining within the

confines of the basic footprint. The drain copper area is 0.0019 sq. in. (or 1.22 sq. mm). This will assist the power dissipation path away from the device (through the copper leadframe) and into the board and exterior chassis (if applicable) for the single device. The addition of a further copper area and/or the addition of vias to other board layers will enhance the performance still further.

# NTHD4401P

## PACKAGE DIMENSIONS

ChipFET™  
CASE 1206A-03  
ISSUE G

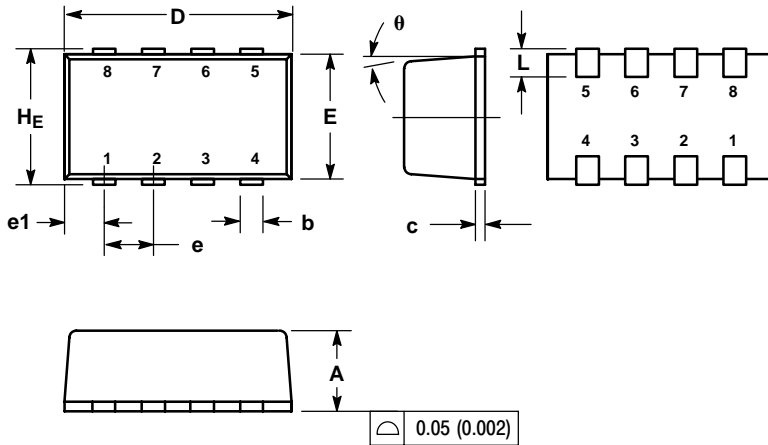

### NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. MOLD GATE BURRS SHALL NOT EXCEED 0.13 MM PER SIDE.
4. LEADFRAME TO MOLDED BODY OFFSET IN HORIZONTAL AND VERTICAL SHALL NOT EXCEED 0.08 MM.
5. DIMENSIONS A AND B EXCLUSIVE OF MOLD GATE BURRS.
6. NO MOLD FLASH ALLOWED ON THE TOP AND BOTTOM LEAD SURFACE.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.00	1.05	1.10	0.039	0.041	0.043
b	0.25	0.30	0.35	0.010	0.012	0.014
c	0.10	0.15	0.20	0.004	0.006	0.008
D	2.95	3.05	3.10	0.116	0.120	0.122
E	1.55	1.65	1.70	0.061	0.065	0.067
e	0.65 BSC			0.025 BSC		
e1	0.55 BSC			0.022 BSC		
L	0.28	0.35	0.42	0.011	0.014	0.017
HE	1.80	1.90	2.00	0.071	0.075	0.079
θ	5° NOM			5° NOM		

### STYLE 2:

- PIN 1. SOURCE 1
2. GATE 1
3. SOURCE 2
4. GATE 2
5. DRAIN 2
6. DRAIN 2
7. DRAIN 1
8. DRAIN 1

ChipFET is a trademark of Vishay Siliconix.

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA  
**Phone:** 480-829-7710 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 480-829-7709 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Japan:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850

**ON Semiconductor Website:** <http://onsemi.com>

**Order Literature:** <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.

**NTHD4401P/D**