



P0804BD8

N-Channel Enhancement Mode MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
40V	8mΩ @ $V_{GS} = 10V$	62A



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	40	V
Gate-Source Voltage		V_{GS}	± 20	
Continuous Drain Current	$T_C = 25^\circ C$	I_D	62	A
	$T_C = 100^\circ C$		39	
Pulsed Drain Current ¹		I_{DM}	160	A
Avalanche Current		I_{AS}	52	
Avalanche Energy ²	$L = 0.1\text{mH}$	E_{AS}	137	mJ
Power Dissipation	$T_C = 25^\circ C$	P_D	50	W
	$T_C = 100^\circ C$		20	
Junction & Storage Temperature Range		T_J, T_{STG}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE		SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case		$R_{\theta JC}$	2.5	62.5	°C / W
Junction-to-Ambient		$R_{\theta JA}$			

¹Pulse width limited by maximum junction temperature.

² $V_{DD} = 20V$ Starting $T_J = 25^\circ C$.

P0804BD8

N-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, Unless Otherwise Noted)







PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	40			V
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250\mu\text{A}$	1.7	2.0	3.0	
Gate-Body Leakage	I_{GSS}	$V_{\text{DS}} = 0\text{V}, V_{\text{GS}} = \pm 20\text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 32\text{V}, V_{\text{GS}} = 0\text{V}$			1	μA
		$V_{\text{DS}} = 30\text{V}, V_{\text{GS}} = 0\text{V}, T_J = 125^\circ\text{C}$			10	
On-State Drain Current ¹	$I_{\text{D}(\text{ON})}$	$V_{\text{DS}} = 10\text{V}, V_{\text{GS}} = 10\text{V}$	160			A
Drain-Source On-State Resistance ¹	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}} = 4.5\text{V}, I_D = 20\text{A}$		14	22	$\text{m}\Omega$
		$V_{\text{GS}} = 10\text{V}, I_D = 20\text{A}$		6.5	8	
Forward Transconductance ¹	g_{fs}	$V_{\text{DS}} = 10\text{V}, I_D = 20\text{A}$		40		S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = 20\text{V}, f = 1\text{MHz}$		2350		pF
Output Capacitance	C_{oss}			406		
Reverse Transfer Capacitance	C_{rss}			286		
Gate Resistance	R_g	$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = 0\text{V}, f = 1\text{MHz}$		1		Ω
Total Gate Charge ²	$Q_{\text{g}(\text{VGS} = 10\text{V})}$	$V_{\text{DS}} = 0.5V_{(\text{BR})\text{DSS}}, V_{\text{GS}} = 10\text{V}, I_D = 20\text{A}$		42		nC
	$Q_{\text{g}(\text{VGS} = 4.5\text{V})}$			18		
Gate-Source Charge ²	Q_{gs}			11		
Gate-Drain Charge ²	Q_{gd}			10		
Turn-On Delay Time ²	$t_{\text{d}(\text{on})}$	$V_{\text{DS}} = 20\text{V}, R_L = 1\Omega, I_D \approx 20\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 6\Omega$		19		nS
Rise Time ²	t_r			18		
Turn-Off Delay Time ²	$t_{\text{d}(\text{off})}$			58		
Fall Time ²	t_f			20		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_J = 25^\circ\text{C}$)						
Continuous Current	I_S				38	A
Forward Voltage ¹	V_{SD}	$I_F = 20\text{A}, V_{\text{GS}} = 0\text{V}$			1.3	V
Reverse Recovery Time	t_{rr}	$I_F = 20\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$		32		nS
Reverse Recovery Charge	Q_{rr}			29		nC

¹Pulse test : Pulse Width $\leq 300\ \mu\text{sec}$, Duty Cycle $\leq 2\%$.

²Independent of operating temperature.


P0804BD8

N-Channel Enhancement Mode MOSFET

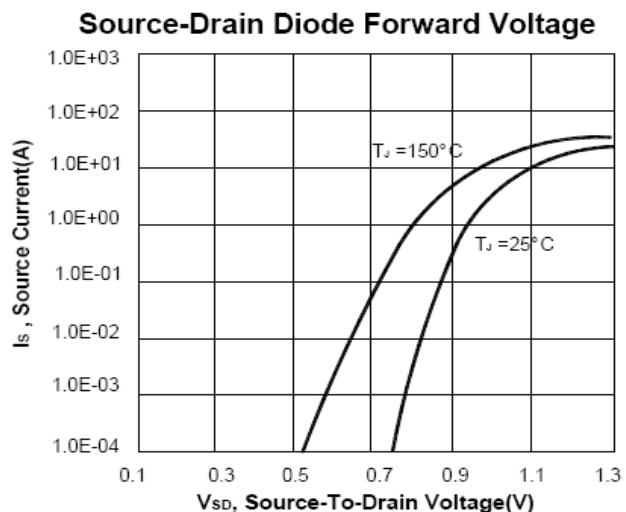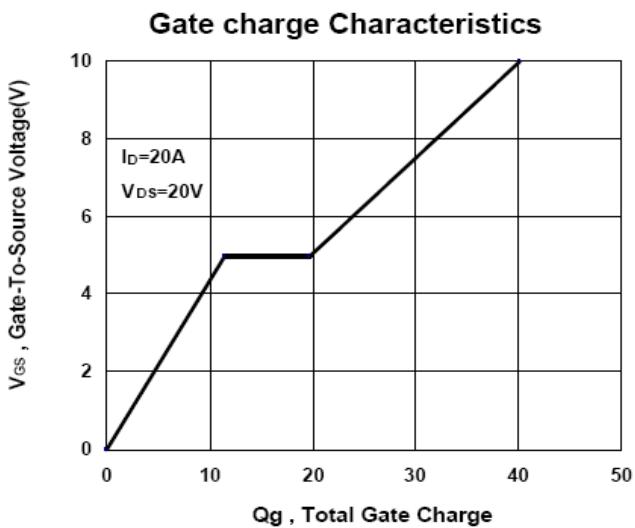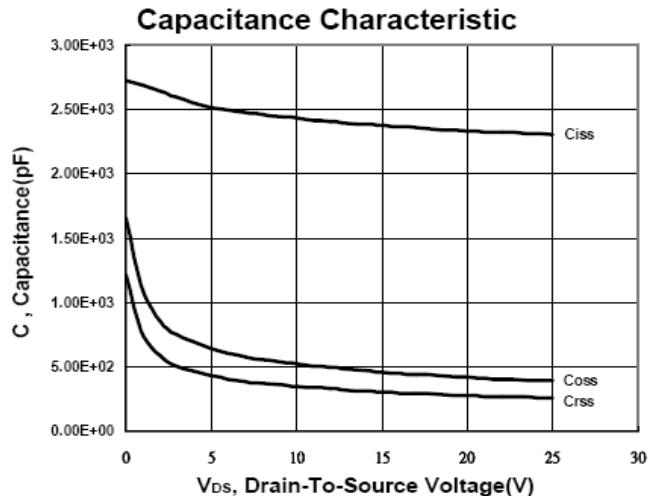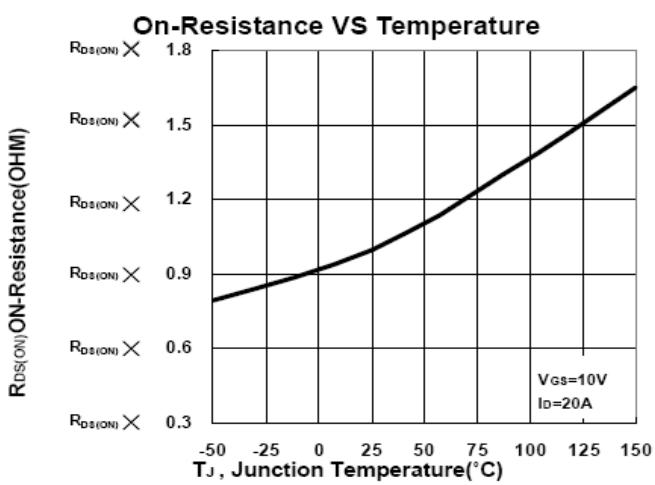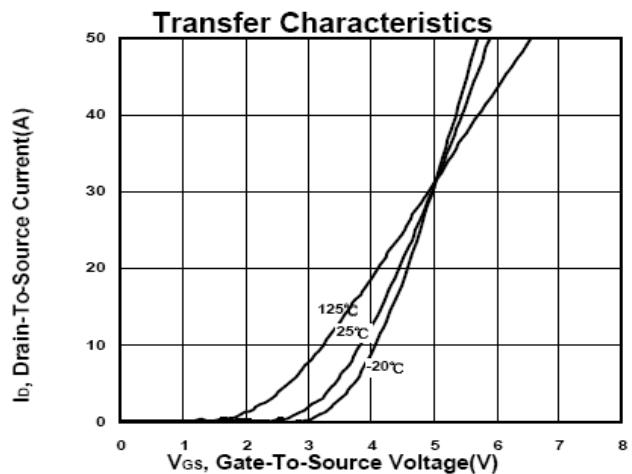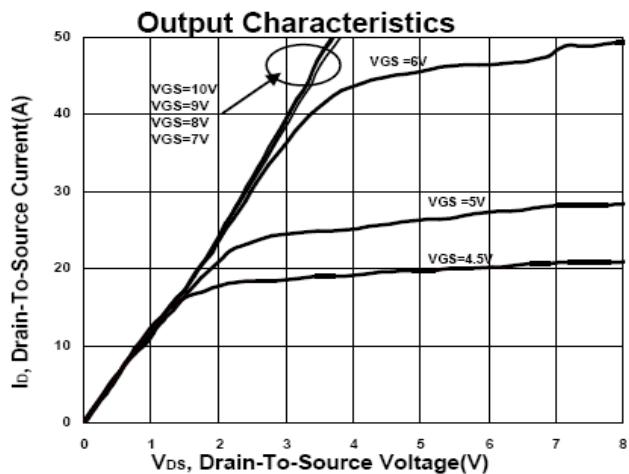

P0804BD8

N-Channel Enhancement Mode MOSFET

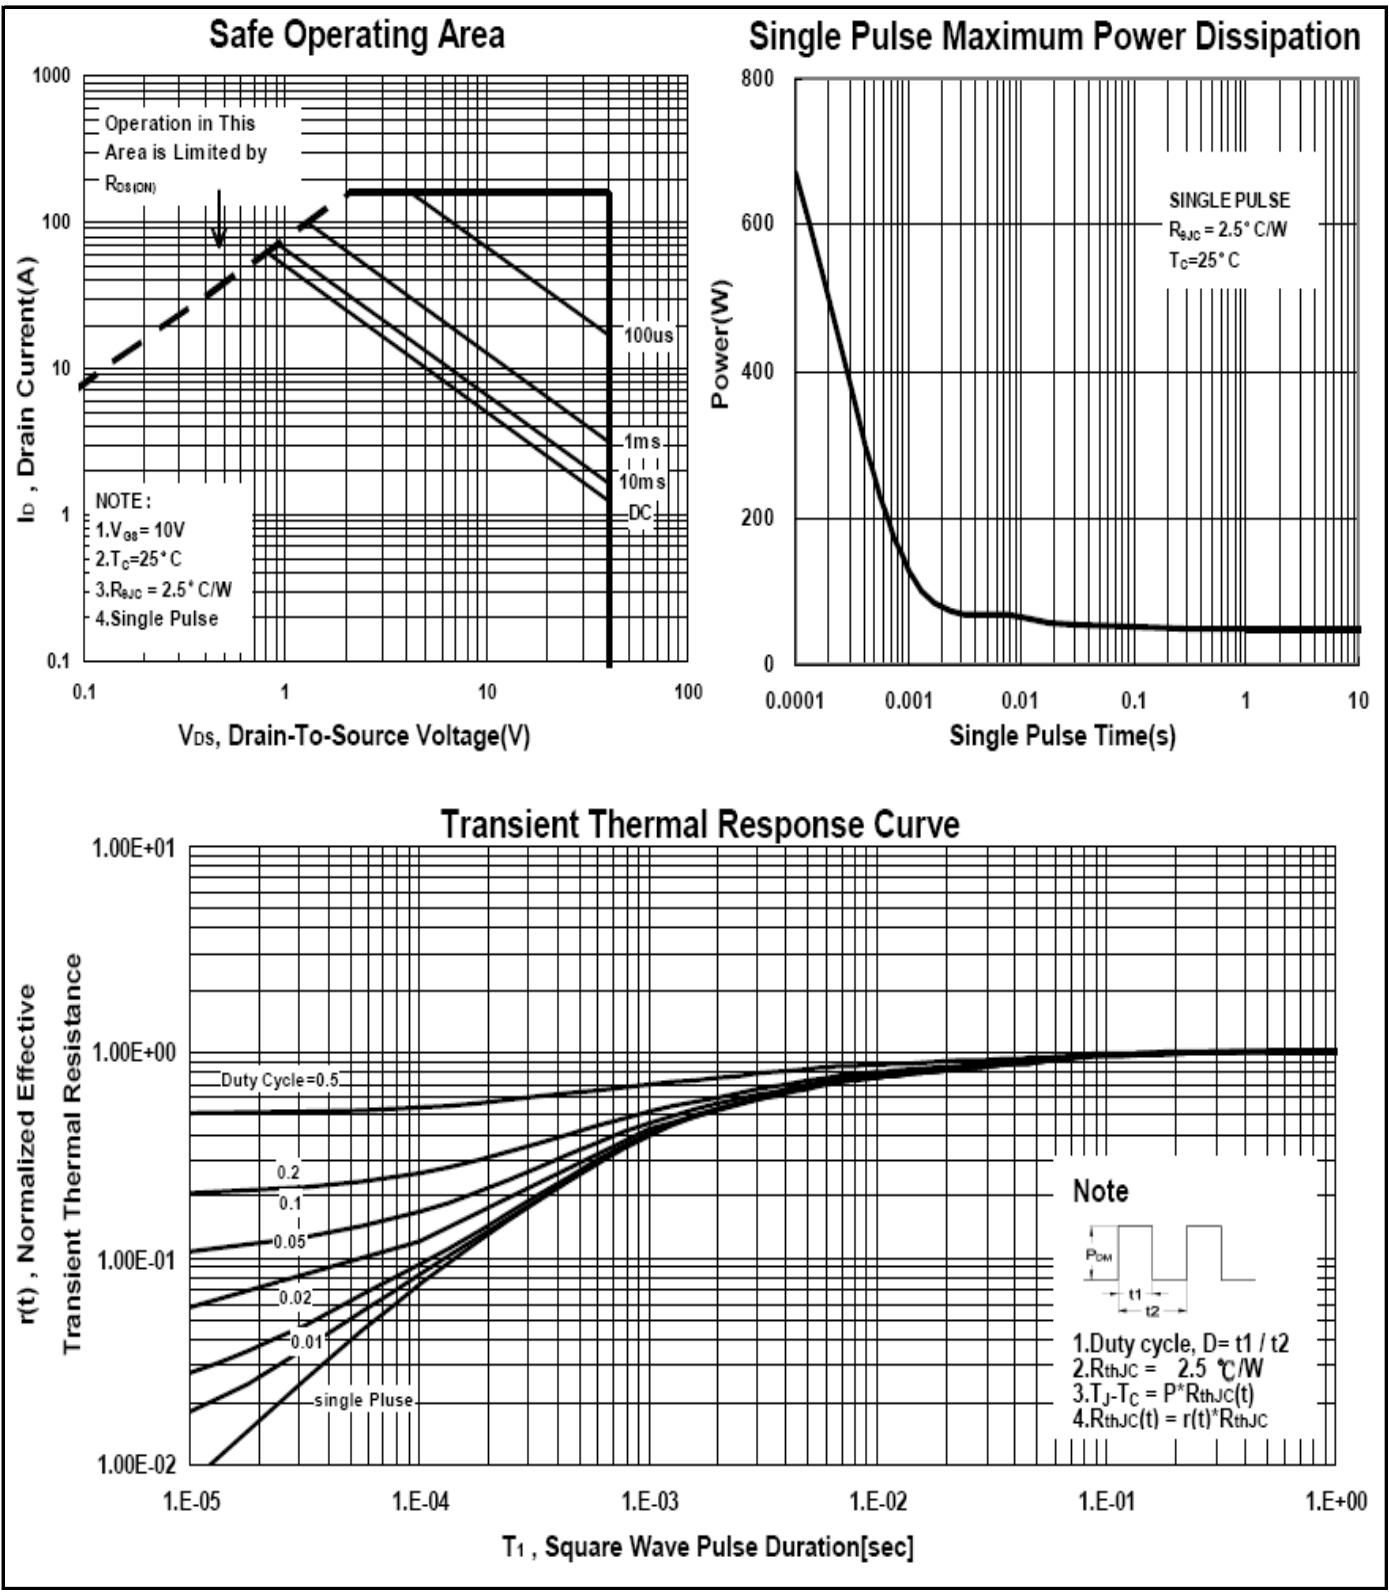

P0804BD8

N-Channel Enhancement Mode MOSFET

Package Dimension

TO-252 (DPAK) MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	8.9	10	10.41	J	4.8		5.64
B	2.1	2.2	2.5	K	0.15		1.49
C	0.4	0.5	0.61	L	0.4	0.76	0.91
D	0.82	1.2	1.5	M	4.2	4.58	5
E	0.35	0.5	0.65	S	4.57	5.1	5.52
F	0		0.2	T	3.81	4.75	5.24
G	5.3	6.1	6.3	U	1.4		1.78
H	0.5		1.7	V	0.55	1.25	1.7
I	6.3	6.5	6.8				

