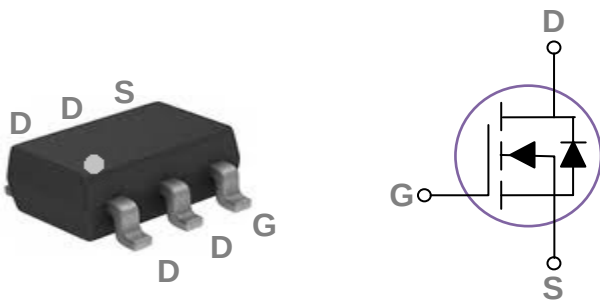


General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

SOT23-6 Pin Configuration



BVDSS	RDS(on)	ID
40V	35mΩ	5A

Features

- 40V, 5A, $R_{DS(ON)} = 35m\Omega$ @ $V_{GS} = 10V$
- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available

Applications

- MB / VGA / Vcore
- Load Switch
- Hand-Held Instrument

Absolute Maximum Ratings $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	40	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current – Continuous ($T_C=25^\circ\text{C}$)	5	A
	Drain Current – Continuous ($T_C=100^\circ\text{C}$)	3	A
I_{DM}	Drain Current – Pulsed ¹	20	A
P_D	Power Dissipation ($T_C=25^\circ\text{C}$)	1.56	W
	Power Dissipation – Derate above 25°C	0.012	W/ $^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	80	$^\circ\text{C/W}$

Electrical Characteristics (T_J=25 °C, unless otherwise noted)

Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250uA	40	---	---	V
ΔBV _{DSS} /ΔT _J	BV _{DSS} Temperature Coefficient	Reference to 25°C, I _D =1mA	---	0.04	---	V/°C
I _{DSS}	Drain-Source Leakage Current	V _{DS} =40V, V _{GS} =0V, T _J =25°C	---	---	1	uA
		V _{DS} =32V, V _{GS} =0V, T _J =125°C	---	---	10	uA
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±20V, V _{DS} =0V	---	---	±100	nA

On Characteristics

R _{DS(ON)}	Static Drain-Source On-Resistance ³	V _{GS} =10V, I _D =3A	---	28	35	mΩ
		V _{GS} =4.5V, I _D =2A	---	38	45	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =250uA	1.2	1.6	2.5	V
ΔV _{GS(th)}	V _{GS(th)} Temperature Coefficient		---	-4	---	mV/°C
gfs	Forward Transconductance	V _{DS} =10V, I _D =3A	---	6.5	---	S

Dynamic and switching Characteristics

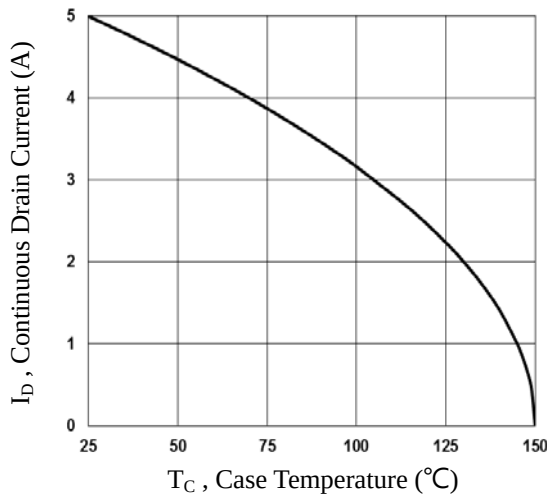
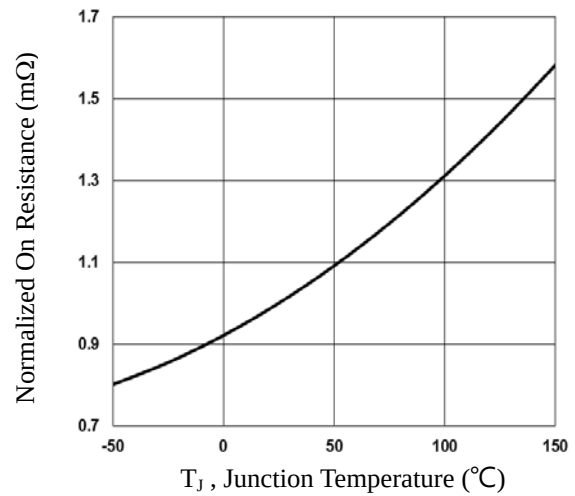
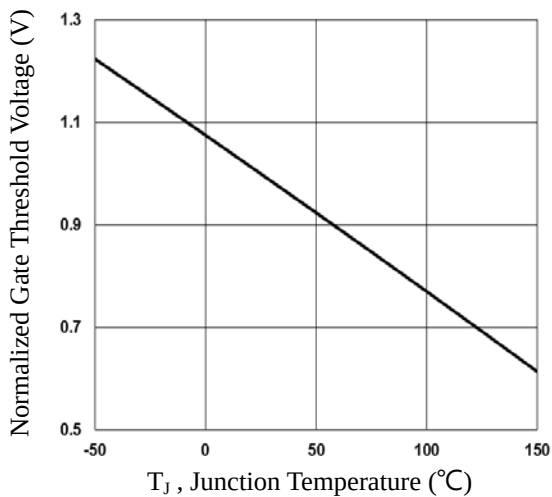
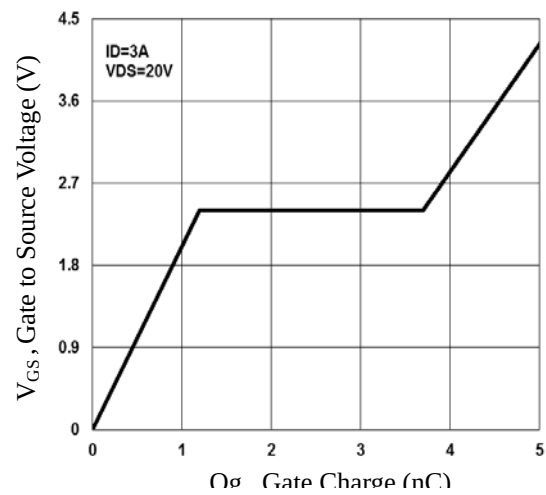
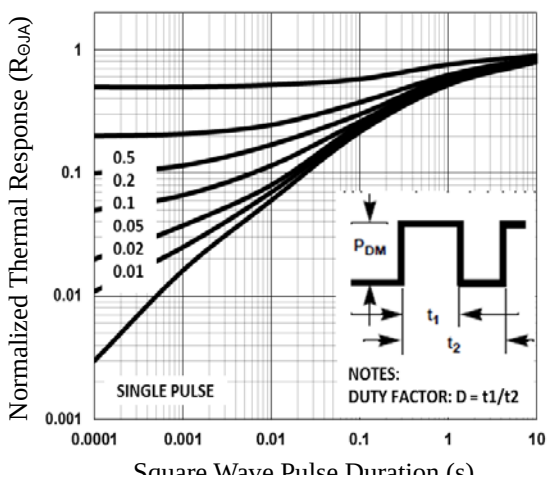
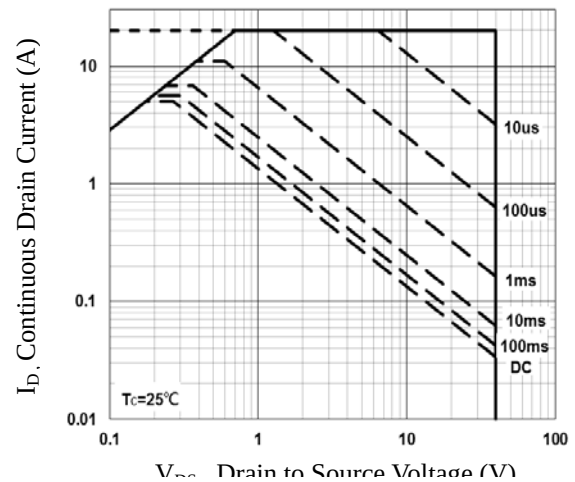
Q _g	Total Gate Charge ^{2, 3}	V _{DS} =20V, V _{GS} =4.5V, I _D =3A	---	5.2	10	nC
Q _{gs}	Gate-Source Charge ^{2, 3}		---	1.2	2.4	
Q _{gd}	Gate-Drain Charge ^{2, 3}		---	2.5	5	
T _{d(on)}	Turn-On Delay Time ^{2, 3}	V _{DD} =20V, V _{GS} =4.5V, R _G =25Ω I _D =1A	---	3.2	6	ns
T _r	Rise Time ^{2, 3}		---	8.6	16	
T _{d(off)}	Turn-Off Delay Time ^{2, 3}		---	18	36	
T _f	Fall Time ^{2, 3}		---	6	12	
C _{iss}	Input Capacitance	V _{DS} =25V, V _{GS} =0V, F=1MHz	---	420	800	pF
C _{oss}	Output Capacitance		---	65	120	
C _{rss}	Reverse Transfer Capacitance		---	40	80	

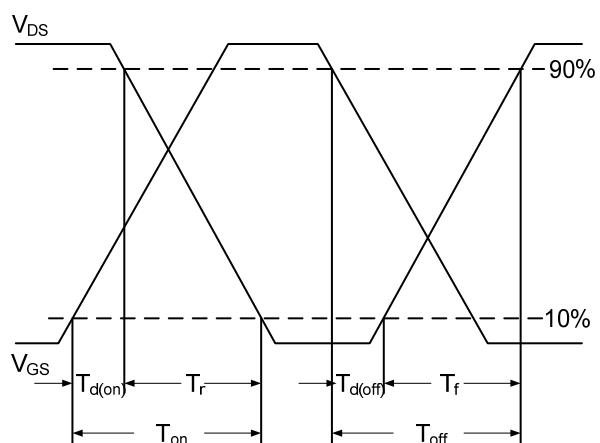
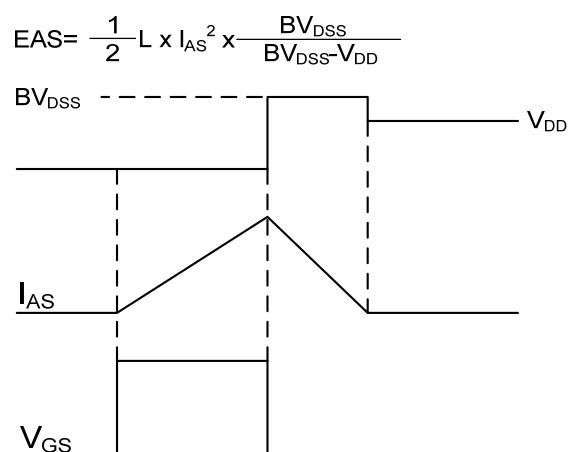
Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _S	Continuous Source Current	V _G =V _D =0V, Force Current	---	---	5	A
I _{SM}	Pulsed Source Current ²		---	---	10	A
V _{SD}	Diode Forward Voltage ²	V _{GS} =0V, I _S =1A, T _J =25°C	---	---	1	V
t _{rr}	Reverse Recovery Time	V _{GS} =0V, I _S =1A, di/dt=100A/μs	---	---	---	ns
Q _{rr}	Reverse Recovery Charge	T _J =25°C	---	---	---	nC

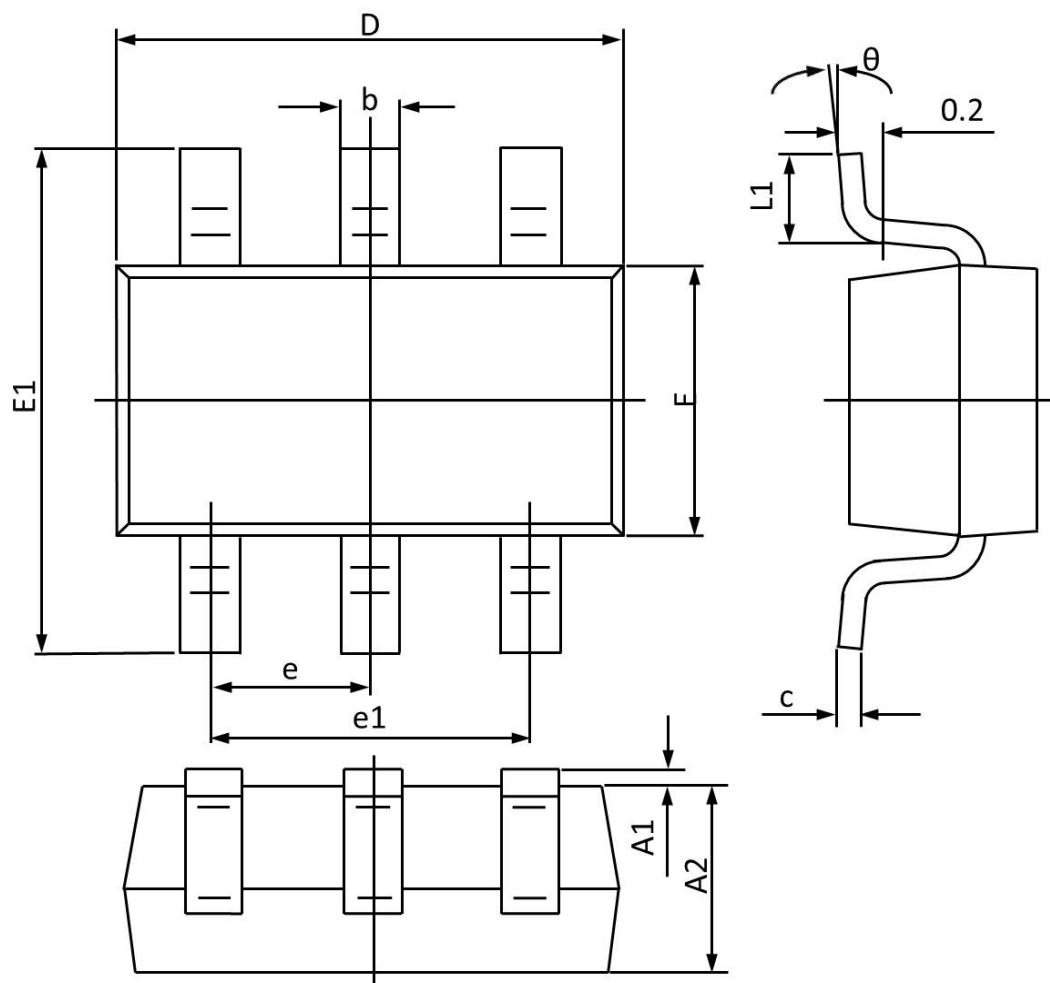
Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed, pulse width ≤ 300us, duty cycle ≤ 2%.
3. Essentially independent of operating temperature.


Fig.1 Continuous Drain Current vs. T_C

Fig.2 Normalized $R_{DS(on)}$ vs. T_J

Fig.3 Normalized V_{th} vs. T_J

Fig.4 Gate Charge Waveform

Fig.5 Normalized Transient Response

Fig.6 Maximum Safe Operation Area


Fig.7 Switching Time Waveform

Fig.8 EAS Waveform

SOT23-6 PACKAGE INFORMATION



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A1	0.000	0.100	0.000	0.004
A2	1.000	1.200	0.040	0.047
b	0.300	0.500	0.012	0.019
c	0.047	0.207	0.002	0.008
D	2.800	3.000	0.110	0.118
E1	2.600	3.000	0.103	0.118
e	0.950 TYP		0.037 TYP	
e1	1.900 TYP		0.075 TYP	
L1	0.250	0.550	0.010	0.021
θ	0°	8°	0°	8°