

# QDLASER

## QLD1061

1064 nm DFB Laser Butterfly Package

C00033-07 May 2011



### 1. DESCRIPTION

The QLD1061 is a 1064-nm distributed feedback (DFB) laser for use in seeder for fiber lasers and sensing applications. The laser is assembled into a 14-pin butterfly package with an optical isolator, a monitor PD and a thermo-electric cooler.

### 2. FEATURES

- Single longitudinal mode operation at 1064 nm
- Fiber-pigtailed 14-pin butterfly package with a TEC
- Optical isolator integration
- Polarization maintaining fiber integration
- CW/Pulse operation

### 3. APPLICATION

- Seeder for fiber lasers
- Sensing

### 4. ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATING	UNIT
Optical Output power	$P_f$	50	mW
LD Forward Current	$I_F$	250	mA
LD Reverse Voltage	$V_{RLD}$	2	V
TEC Drive Current	$I_{TEC}$	2	A
TEC Drive Voltage	$V_{TEC}$	4.3	V
Operation Temperature	$T_c$	0 to 60	°C
Storage Temperature	$T_{stg}$	-40 to 85	°C
Lead Soldering Temperature (5 s)	$T_{sld}$	230	°C


## 5. OPTICAL AND ELECTRICAL CHARACTERISTICS

( $T_{LD} = 25^{\circ}\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Peak Wavelength	$\lambda_p$	CW, $P_f=30\text{ mW}$	1059*	1064	1069*	nm
Spectral Width (FWHM)	$\Delta\nu$	CW, $P_f=30\text{ mW}$	-	4	20	MHz
Temperature Coefficient of $\lambda_p$	$d\lambda_p/dT$	CW	-	0.08	-	nm/K
Current Coefficient of $\lambda_p$	$d\lambda_p/dI$	CW	-	0.008	-	nm/mA
Fiber Output Power	$P_f$	CW	30	-	-	mW
Threshold Current	$I_{th}$	CW	-	15	-	mA
Operation Current	$I_{op}$	CW, $P_f=30\text{ mW}$	-	150	200	mA
Operation Voltage	$V_{op}$	CW, $P_f=30\text{ mW}$	-	1.7	2.0	V
Sidemode Suppression Ratio	SMSR	CW, $P_f=30\text{ mW}$	-	40	-	dB
Polarization Extinction Ratio	PER	CW, $P_f=30\text{ mW}$	15	20	-	dB
Monitor PD Current	$I_m$	CW, $P_f=30\text{ mW}$	100	500	1000	$\mu\text{A}$
Thermistor Resistance	$R_{th}$	$T_{LD} = 25^{\circ}\text{C}$ , $B=3900\text{K}$	9.5	10	10.5	$\text{k}\Omega$


\*Peak wavelength tolerance of +/- 1nm is available as an option.

## 6. OUTLINE DRAWING

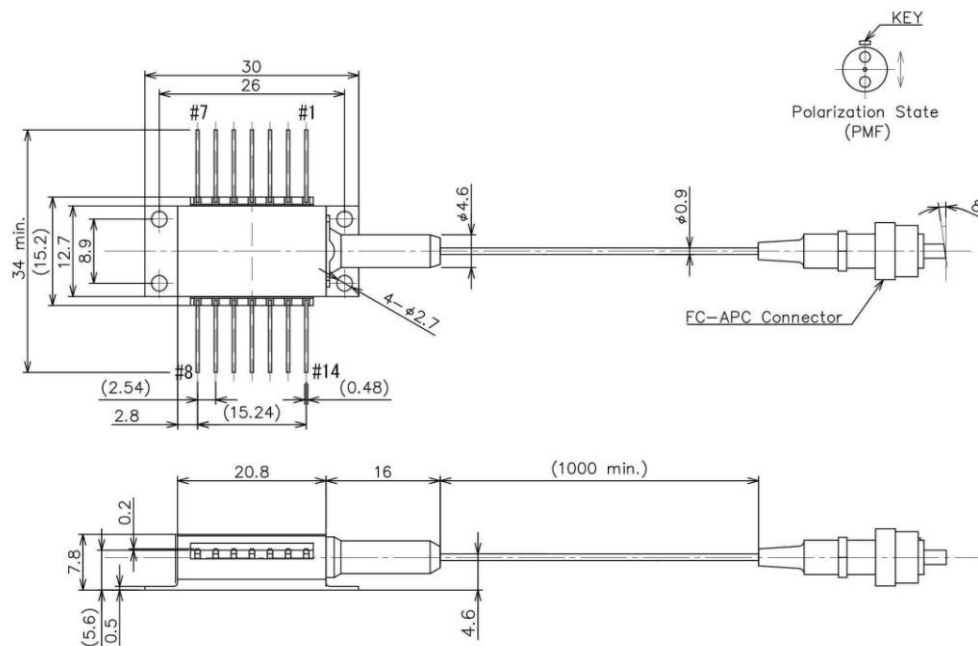

## 7. PIN CONFIGURATION

No.	Description	No.	Description
1	TEC (+)	8	NC
2	Thermistor	9	NC
3	PD Anode	10	Laser Anode
4	PD Cathode	11	Laser Cathode
5	Thermistor	12	NC
6	NC	13	Case Ground
7	NC	14	TEC (-)

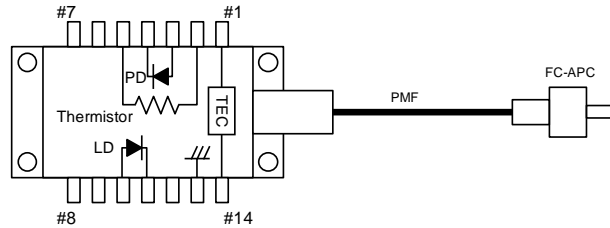

## 8. NOTICE

- Safety Information

This product is classified as Class 3B laser product, and complies with 21 CFR Part 1040.10.

Please do not take a look at laser lighting in operations since laser devices may cause troubles to human eyes.

Please do not eat, burn, break and make chemical process of the products since they contain GaAs material.

- Handling products

Semiconductor lasers are easily damaged by external stress such as excess temperature and ESD.

Please pay attention to handling products, and use within range of maximum ratings.

QDL takes no responsibility for any failure or unusual operation resulting from improper handling, or unusual physical or electrical stress.

- RoHS

This product conforms to RoHS compliance related EU Directive 2002/95/EC.

	<b>LASER DIODE</b> 
	<b>AVOID EXPOSURE-Invisible Laser Radiation is emitted from this aperture.</b>
<b>INVISIBLE LASER RADIATION</b> <b>AVOID DIRECTION EXPOSURE TO BEAM</b> <b>MAXIMUM OUTPUT 300 mW</b> <b>WAVELENGTH 1064 nm</b> <b>CLASS 3B LASER PRODUCT</b>	
This product complies with 21 CFR Part 1040.10 <b>QD Laser, Inc.</b> 1-1 Minamiwataridacho, Kawasaki-ku, Kawasaki, Kanagawa, 210-0855 Japan	

QD Laser, Inc.

Contact : [info@qdlaser.com](mailto:info@qdlaser.com) <http://www.qdlaser.com>

Copyright 2009-2011 All Rights Reserved by QD Laser, Inc.

Keihin Bldg. 1F 1-1 Minamiwataridacho, Kawasaki-ku, Kawasaki, Kanagawa Zip 210-0855 Japan

All company or product names mentioned herein are trademarks or registered trademarks of their respective owners. Information provided in this data sheet is accurate at time of publication and is subject to change without advance notice.