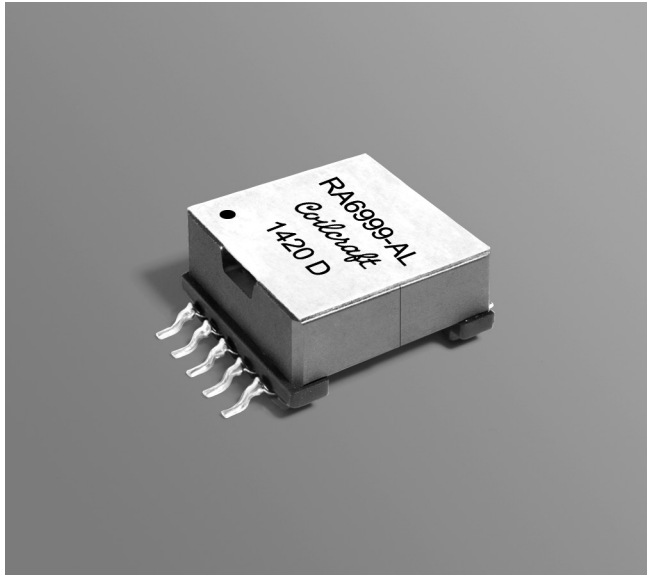


NEW!

Forward Mode Transformer

For Maxim MAX17599
PWM Controller

- Forward mode transformer for the Maxim MAX17599 Active Clamp Current-Mode PWM Controller
- 18 – 36 V input; 12 V, 3.3 A output
- 1500 Vrms, one minute isolation from primary to secondary and gate windings
- Specified on reference design MAXREFDES48#

Core material Ferrite**Terminations** RoHS tin-silver (96.5/3.5) over tin over nickel over phos bronze.**Weight** 10.5 g**Ambient temperature** –40°C to +85°C**Storage temperature** Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 175 per 13" reel Plastic tape: 44 mm wide, 0.4 mm thick, 28 mm pocket spacing, 11.9 mm pocket depth**PCB washing** Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf.

Part number ¹	Inductance at 0A ² min (μH)	DCR max (mOhms)			Leakage inductance max (μH)	Turns ratio		Output ³
		pri	sec	gate		pri : sec	pri : gate	
RA6999-AL_	70	20.5	29.5	36.4	0.35	1:1.125	1:0.375	12 V, 3.3 A

1. When ordering, please specify a **packaging** code:**RA6999-ALD****Packaging:** D = 13" machine ready reel. EIA-481 embossed plastic tape (175 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

2. Inductance is measured at 250 kHz, 0.1 Vrms.

3. Output is for the secondary winding. Output of the gate winding is 12 V, 0.25 A

4. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

