




The Timken Company
 4500 Mt Pleasant St. NW
 N. Canton, OH 44720
 Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • Web site: www.timken.com

Timken Part Number RCJ1 3/8, Fafnir® Four-Bolt Flanged Units Eccentric Locking Collar

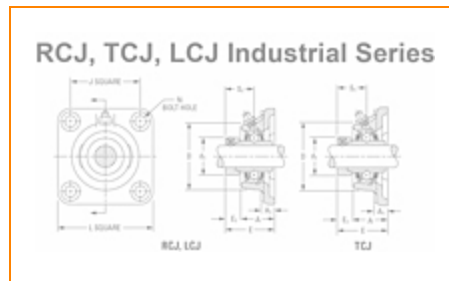

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Shaft Size d	1 3/8 in 34.9 mm
Bearing Number	G1106KRRB
Dimension D	3.500 in 88.9 mm
Dimension E	2.106 in 53.5 mm
Inside Ring Outside Diameter	2.110 in 53.6 mm
Series	Industrial
Weight	3.94 lb 1.787 Kg
Seal Type	Shroud Seal

Housing Construction	Four-Bolt Square Flange
-----------------------------	-------------------------

Alternate Part Name	RCJ13/8
----------------------------	---------

Dimensions

Total Length L	117.5 mm 4.626 in
-----------------------	----------------------

Housing Width A	1.252 in 31.8 mm
------------------------	---------------------

Bolt Hole Spacing J	92.1 mm 3.626 in
----------------------------	---------------------

Bolt Hole Size N	12 mm 0.472 in
-------------------------	-------------------

Flange Thickness A1	13.5 mm 0.531 in
----------------------------	---------------------

Center of Bearing from Housing End A2	21 mm 0.827 in
--	-------------------

Inside Ring Width B	N/A
----------------------------	-----


Bolt Size	M12
------------------	-----

Center of Bearing from Bearing End S	21 mm 0.827 in
---	-------------------

Basic Load Ratings

Static Load Rating	3440 lbf 15300 N
---------------------------	---------------------

Dynamic Load Rating	6400 lbf 28500 N
----------------------------	---------------------

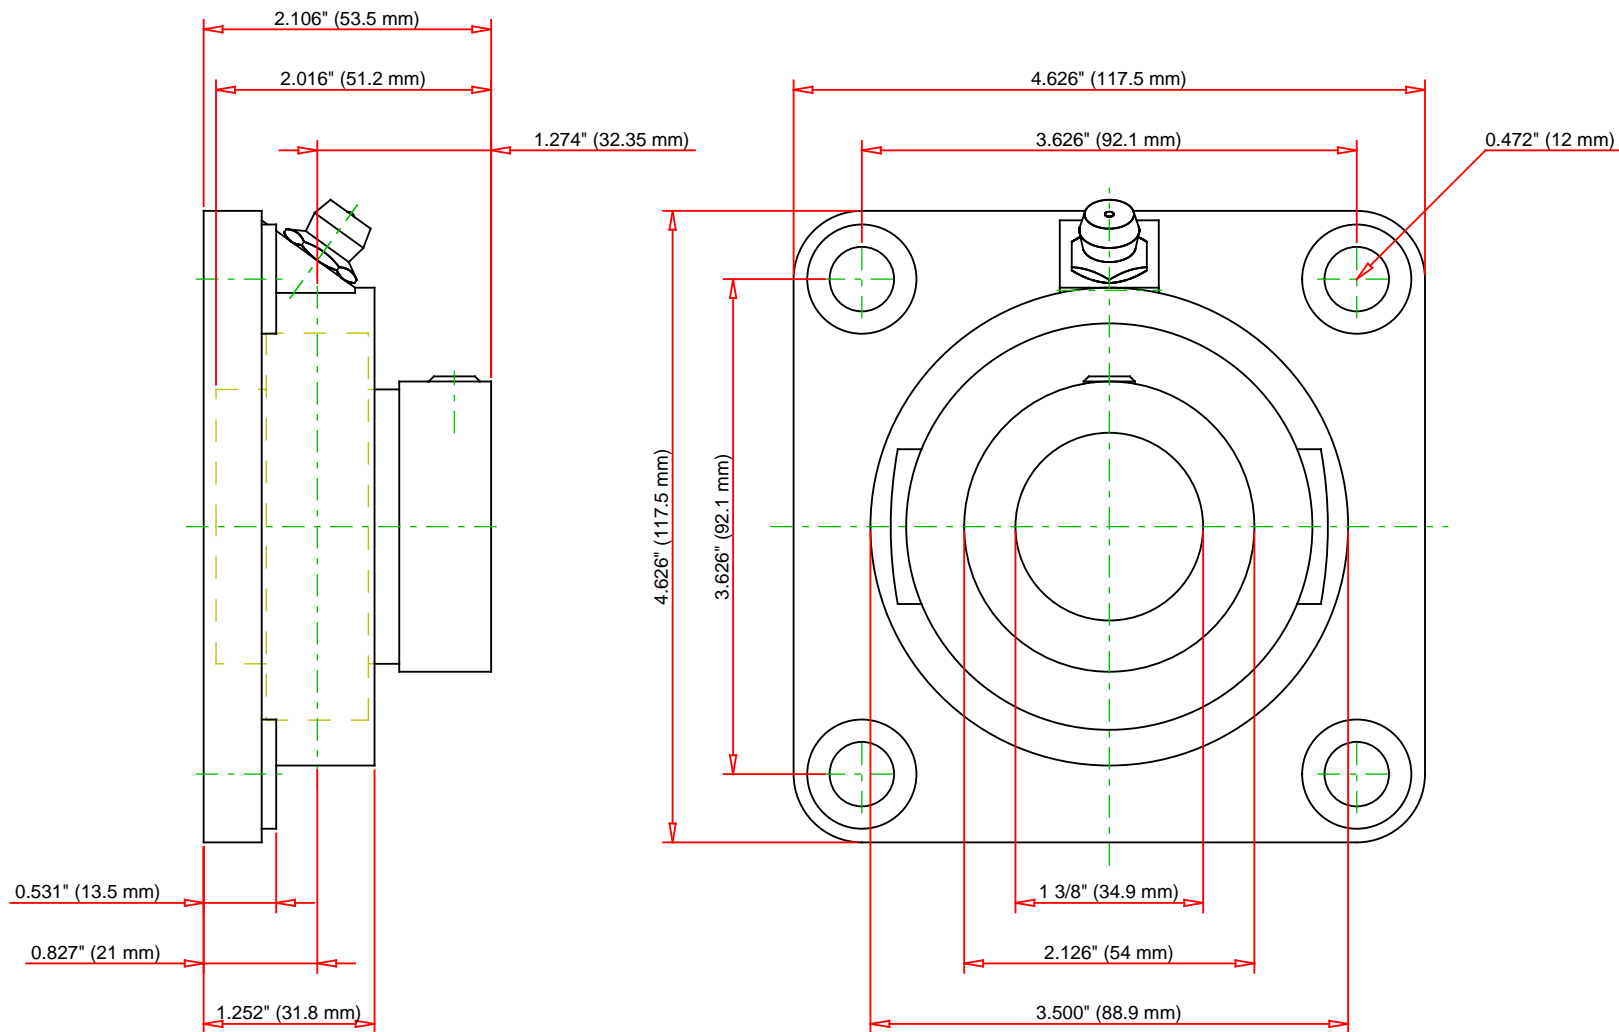

Bearing Number	G1106KRRB			
Load Ratings - C _r	6400	lbf	28500	N
Load Ratings - C _{0r}	3400	lbf	15100	N
Weight	3.94	lb	1.787	kg

TIMKEN
 THE TIMKEN COMPANY
 NORTH CANTON, OHIO USA

RCJ1 3/8
 Fafnir® Four-Bolt Flanged Units Eccentric Locking Collar

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY