

RE-260RA

MABUCHI MOTOR

OUTPUT : 0.4W ~ 4.0W (APPROX)

金属ブラシ | Metal-brush motors | 金属电刷

代表的用途 玩具・模型


Typical Applications Toys and Models

主要用途 玩具、模型

WEIGHT : 28g (APPROX)

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
			r/min	A	r/min	A	mN-m	g-cm	W	mN-m	g-cm	A
RE-260RA-2670	1.5~3.0	1.5V CONSTANT	6300	0.16	5040	0.64	0.98	10.0	0.52	4.90	50	2.56
RE-260RA-18130	1.5~4.5	3V CONSTANT	6900	0.095	5470	0.36	0.97	9.9	0.56	4.70	48	1.40
RE-260RA-2295	1.5~4.5	3V CONSTANT	9400	0.15	7610	0.64	1.31	13.3	1.04	6.86	70	2.70


DIRECTION OF ROTATION

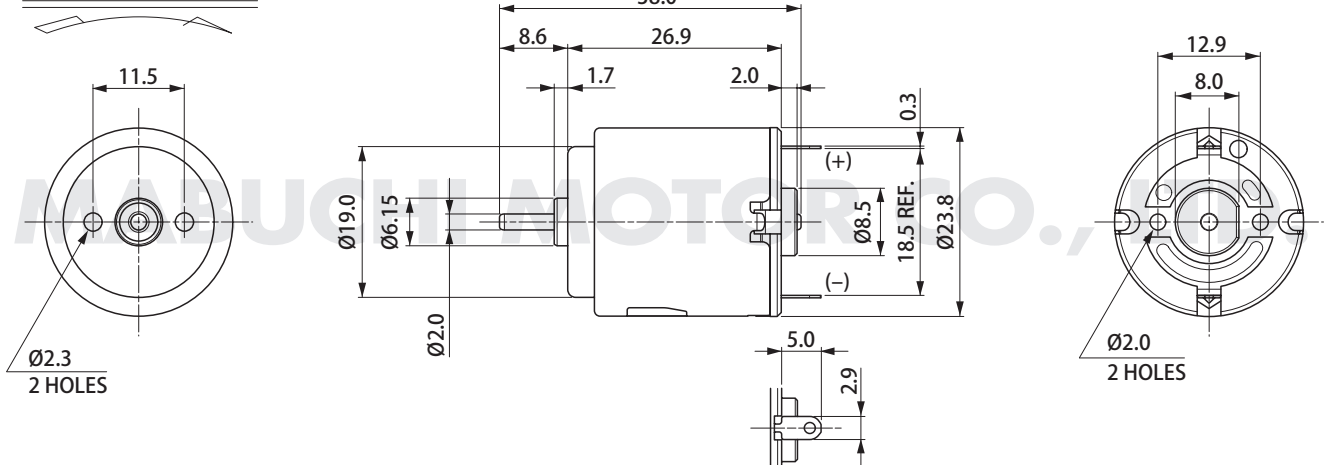

UNIT : MILLIMETERS


RE-260RA-2670

1.5V

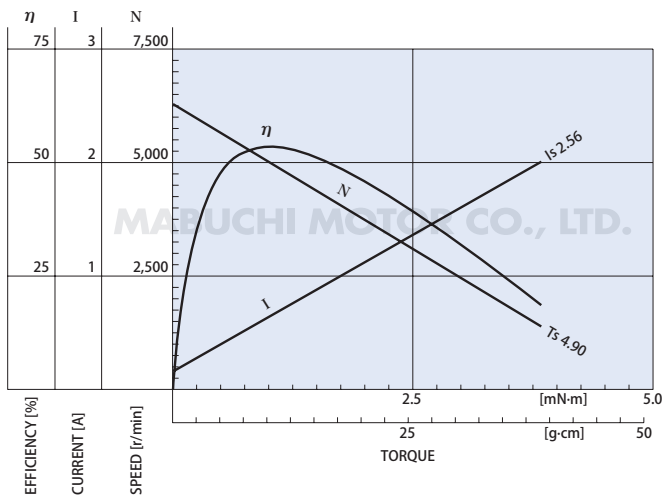

RE-260RA-18130

3.0V

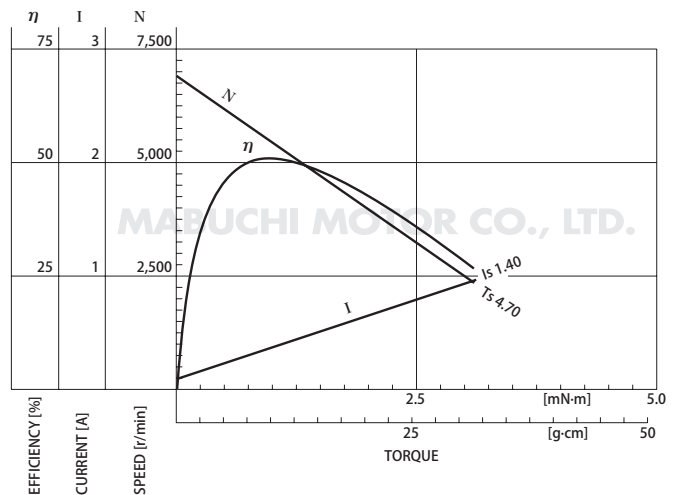

マブチモーター株式会社 (本社 営業部)
MABUCHI MOTOR CO., LTD.
(Headquarters Sales Dept. | 总公司 営業部)

千葉県松戸市松飛台 430 番地 〒270-2280 Tel. 047-710-1868 Fax. 047-710-1132
430 Matsuhidai, Matsudo City, Chiba 270-2280, Japan Tel. 81-47-710-1868 Fax. 81-47-710-1132
E-mail : slsingq@mabuchi-motor.co.jp