

Features

Regulated Converter

- 10:1 ultra wide input voltage range
- 3kVAC/1 minute reinforced insulation
- UL/IEC/EN60950-1 certified
- CE marked, CB report
- Efficiency up to 93%
- -40°C to +97°C baseplate temperature range

RECOM
DC/DC Converter

RPA100H-RUW

**100 Watt
Half Brick
Single Output**



C **UL** **US**
E224736



UL60950-1 certified
CAN/CSA No. 60950-1-07
IEC/EN60950-1 certified
EN50155 compliant
CB report

Description

The half-brick RPA100H series DC/DC converter is designed for railway rolling stock and high voltage battery applications. It has a 10:1 input voltage range to cover all input voltages from nominal 24VDC up to 110VDC in a single product (including EN50155 transients) and offers isolated and regulated 12V, 15V, 24V or 48VDC outputs. The converter has a consistently high efficiency over the entire input voltage range and comes with a metal baseplate to permit a wide operating temperature range from -40°C to +97°C (when baseplate cooled). The case is fitted with threaded inserts to allow secure mounting to the PCB or bulkhead for use in high shock and vibration environments. The converter is certified to UL/IEC/EN60950 and comes with a three year warranty.

Selection Guide

Part Number	Input Voltage Range ⁽¹⁾ [VDC]	Output Voltage [VDC]	Output Current [A]	Efficiency typ. ⁽²⁾ [%]	Max. Capacitive Load ⁽³⁾ [μF]
RPA100H-11012SRUW ⁽⁴⁾	16.5-140	12	8.5	90	2200
RPA100H-11015SRUW ⁽⁴⁾	16.5-140	15	6.7	93	2200
RPA100H-11024SRUW ⁽⁴⁾	16.5-140	24	4.2	88	1000
RPA100H-11048SRUW ⁽⁴⁾	16.5-140	48	2.1	90	100


Notes:

Note1: Refer to input voltage graph on page PB-3

Note2: Efficiency is tested at nominal input (110V) and full load at +25°C ambient

Note3: Max. Cap Load is tested at nominal input and full resistive load

Model Numbering

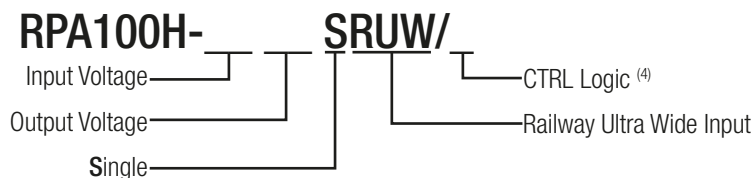

Ordering Examples

RPA100H-11012SRUW/P = 110V Input, 12V Output, Single, Pos. CTRL function

RPA100H-11012SRUW/N = 110V Input, 12V Output, Single, Neg. CTRL function

Notes:

Note4: add suffix "P" for positive logic (1=ON, 0=OFF) or add suffix "N" instead for negative logic (0=ON, 1=OFF)

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Internal Input Filter				Pi-Type
Input Voltage Range		16.5VDC	110VDC	140VDC
Input Surge Voltage	<1s			156VDC
Under Voltage Lockout (UVLO) ⁽⁵⁾	DC-DC ON	15.6VDC	16.0VDC	16.4VDC
	DC-DC OFF	13.6VDC	14.0VDC	14.4VDC
Over Voltage Lockout (OVLO)	DC-DC ON	142VDC	146VDC	150VDC
	DC-DC OFF	154VDC	156VDC	160VDC
Input Current Range	Vin = 16.5V	7A	7.2A	7.5A
Notes:				
Note5: please refer to Under Voltage Lockout Adjustability on page PB-3				
continued on next page				

Specifications (measured @ $T_a = 25^\circ\text{C}$, nom. V_{in} (110V), full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS


Parameter	Condition		Min.	Typ.	Max.
Quiescent Current	$V_{in} = 110\text{V}$	12, 15, 24Vout 48Vout	30mA 50mA	60mA 80mA	90mA 150mA
Output Voltage Trimming			-20%		+10%
Minimum Load			0%		
Start-up Time			200ms		460ms
Rise Time	V_{out} from 10% to 90%			50ms	100ms
ON/OFF Control ⁽⁶⁾	Positive Logic	DC-DC ON DC-DC OFF	Open or $3 < V_r < 5\text{VDC}$ Short or $0 < V_r < 0.4\text{VDC}$		
	Negative Logic	DC-DC ON DC-DC OFF	Short or $0 < V_r < 0.4\text{VDC}$ Open or $3 < V_r < 5\text{VDC}$		
Input Current of CTRL pin	DC-DC ON DC-DC OFF			0.1mA 0.1mA	0.2mA 0.1mA
Standby Current				20mA	
Internal Operating Frequency				140kHz	
Output Ripple & Noise	20MHz BW limited			250mVp-p	
Remote Sense ⁽⁶⁾					$\pm 10\%$

Notes:


Note6: see page PB-5

RPA100H-11012SRUW

Efficiency vs. Output Current

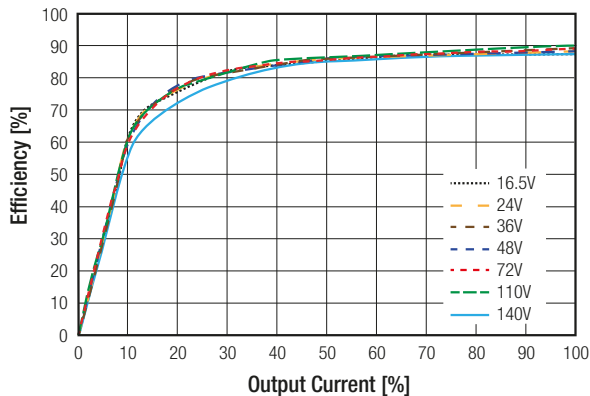


Power Dissipation vs. Output Current

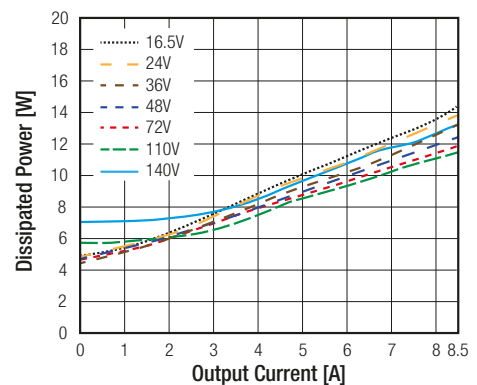


RPA100H-11015SRUW

Efficiency vs. Output Current

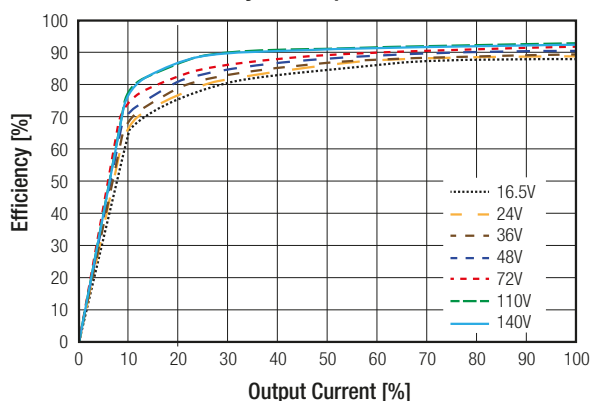



Power Dissipation vs. Output Current

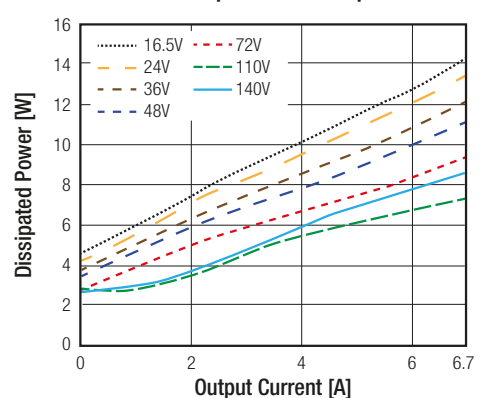



continued on next page

Specifications (measured @ $T_a = 25^\circ\text{C}$, nom. V_{in} (110V), full load and after warm-up unless otherwise stated)


RPA100H-11024SRUW

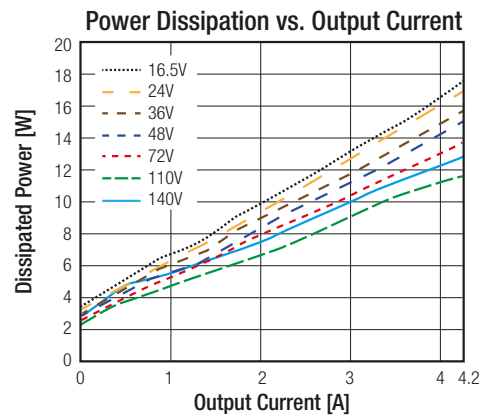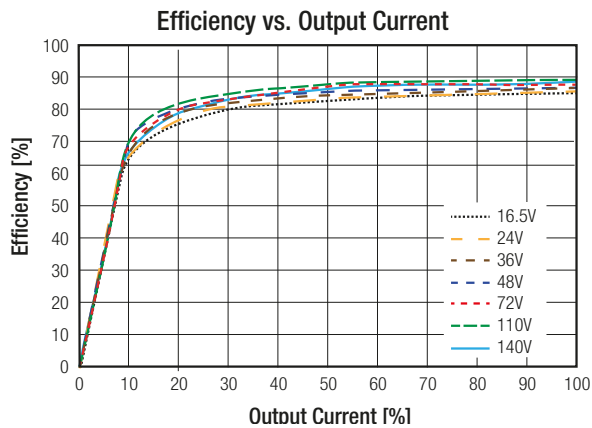

RPA100H-11048SRUW

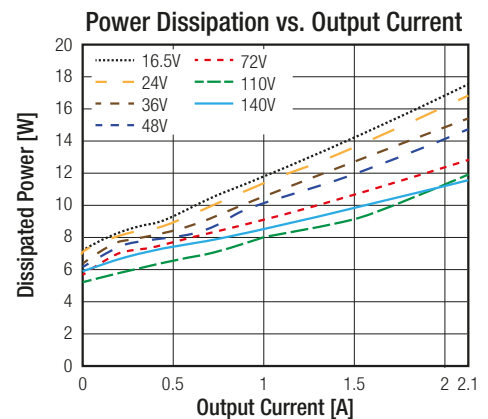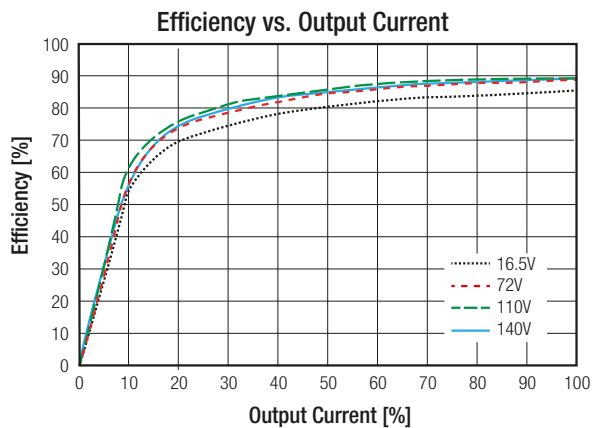


Input Voltage Range

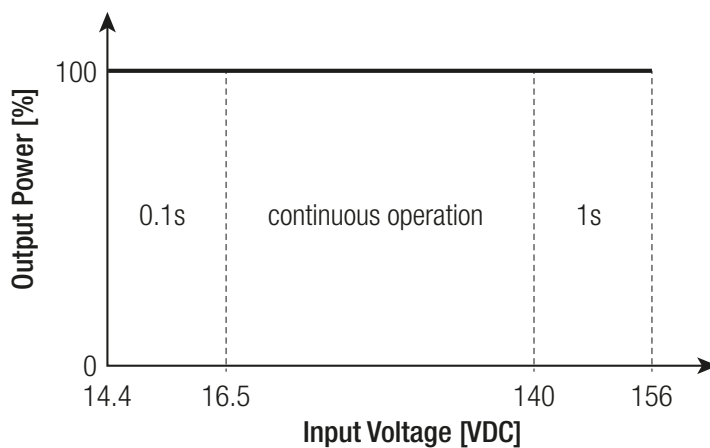

Continuous full power operation is rated between 16.5V and 140V, including full load start-up.

Once running, the converter will operate for short periods of time over an extended input voltage range down to 14.4V and up to 156V, thus covering all EN50155 under-voltage and over-voltage transient conditions.

UNDER VOLTAGE LOCKOUT ADJUSTABILITY

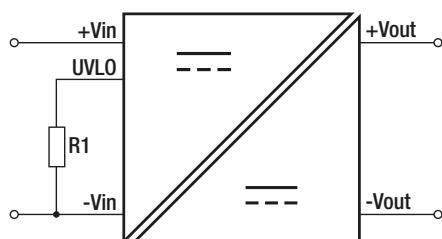

The RPA100H series has an adjustable under voltage lockout which will shut down the converter according to following settings.

Nom. Input Voltage [VDC]	24	36	48	72	110
Turn Off Threshold [VDC]	$14 \pm 0.4\text{V}$	$20.6 \pm 1\text{V}$	$27.5 \pm 1\text{V}$	$40 \pm 1\text{V}$	$64 \pm 2\text{V}$
Turn On Threshold [VDC]	$16 \pm 0.4\text{V}$	$24 \pm 1\text{V}$	$32 \pm 1\text{V}$	$46.5 \pm 1\text{V}$	$74 \pm 2\text{V}$
Resistor R1 [k Ω]	open	24.9	12.4	6.19	3.48

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

OUTPUT VOLTAGE TRIMMING

Output Voltage Trimming

RPA100H-RUW converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. The values for trim resistors shown in trim tables below are according to standard E96 values; therefore, the specified voltage may slightly vary; they also can be calculated with below shown equation.


Trim Calculation

V_{out} = nom. Output Voltage

ΔV_{out} = Output Voltage Change in %

R_{up} = trim up resistor

R_{down} = trim down resistor

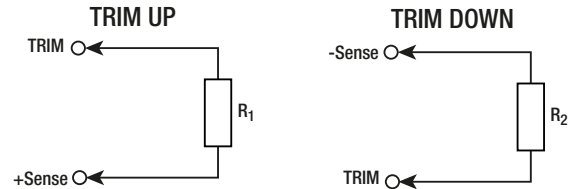

Trim up

$$R_{up} = \left[\frac{45}{\Delta V_{out}} + 40 \right] k\Omega$$

$$R_{up} = \left[\frac{95}{\Delta V_{out}} + 90 \right] k\Omega$$

$$R_{up} = \left[\frac{57.46}{\Delta V_{out}} + 52.35 \right] k\Omega$$

$$R_{up} = \left[\frac{195}{\Delta V_{out}} + 190 \right] k\Omega$$

Trim down

$$R_{down} = \left[\frac{5.11}{\Delta V_{out}} - 10.22 \right] k\Omega$$

Practical Example

Trim Up:

V_{out} = 12V, ΔV_{out} = +10% (13.2V)

$$R_{up} = \left[\frac{45}{10\%} + 40 \right] k\Omega = 490k\Omega \quad (E96 = 490)$$

Trim down:

V_{out} = 24V, ΔV_{out} = -8% (22V)

$$R_{down} = \left[\frac{5.11}{8\%} - 10.22 \right] k\Omega = 53.66k\Omega \quad (E96 = 53.6)$$

Trim up

RPA100H-11012SRUW

Trim up	[%]	1	2	3	4	5	6	7	8	9	10
V _{out} =	[VDC]	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20
R ₁ =	[kΩ]	4530	2320	1540	1150	931	787	681	604	536	487

RPA100H-11015SRUW

Trim up	[%]	1	2	3	4	5	6	7	8	9	10
V _{out} =	[VDC]	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50
R ₁ =	[kΩ]	5760	2940	1960	1500	1210	1010	866	768	681	619

RPA100H-11024SRUW

Trim up	[%]	1	2	3	4	5	6	7	8	9	10
V _{out} =	[VDC]	24.24	24.48	24.72	24.96	25.20	25.44	25.68	25.92	26.16	26.40
R ₁ =	[kΩ]	9530	4870	3240	2490	2000	1690	1430	1270	1150	1050

RPA100H-11048SRUW


Trim up	[%]	1	2	3	4	5	6	7	8	9	10
V _{out} =	[VDC]	48.48	48.96	49.44	49.92	50.40	50.88	51.36	51.84	52.32	52.80
R ₁ =	[kΩ]	19600	9880	6650	5110	4120	3480	3010	2610	2370	2150

Trim down RPA100H series

Trim down	[%]	1	2	3	4	5	6	7	8	9	10
R ₂ =	[kΩ]	499	243	162	118	90.9	75	63.4	53.6	46.4	41.2
Trim down	[%]	11	12	13	14	15	16	17	18	19	20
R ₂ =	[kΩ]	36.5	32.4	28.7	26.1	23.7	22.1	20	18.2	16.5	15.4

Specifications (measured @ $T_a = 25^\circ\text{C}$, nom. V_{in} (110V), full load and after warm-up unless otherwise stated)


EXTERNAL CAPACITOR

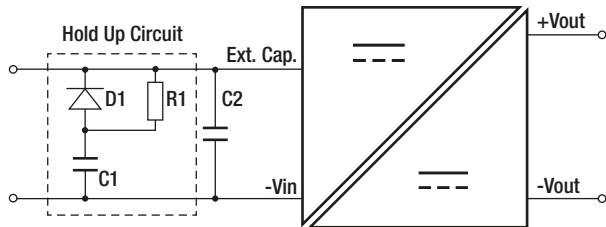

A 240 μF /200V capacitor (C2) is required for normal operation.
To meet power supply interruptions, an external circuit comprised of a capacitor (C1), a 100 Ω /10W resistor (R1) and a diode (D1) is required.

C1	24Vin	36Vin	48Vin	72Vin	96Vin	110Vin
For 10ms	2400 μF	2400 μF	2400 μF	2400 μF	820 μF	560 μF
For 30ms	7200 μF	7200 μF	7200 μF	7200 μF	2460 μF	1680 μF


ON/OFF CONTROL

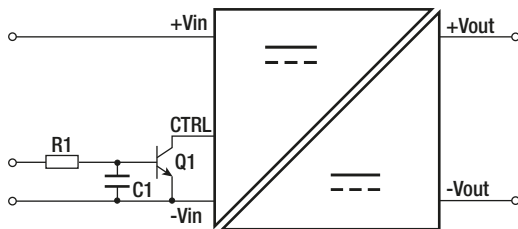

For negative logic, if the remote on/off feature is not used, short the on/off pin to -Vin.

For positive logic, if the remote on/off feature is not used, leave the on/off pin floating.

REMOTE SENSE

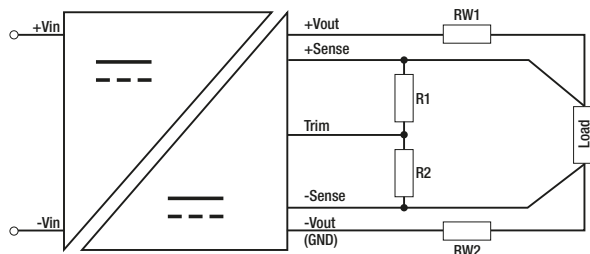

The output voltage can be adjusted by both trim and remote sense. The maximum combined adjustment range is $\pm 10\%$. Derate the maximum output power if using the trim or sense function to increase the output voltage.

R_{W1} ... wire losses +
 R_{W2} ... wire losses -
 R_1 ... trim up resistor
 R_2 ... trim down resistor





REGULATION

Parameter	Condition	Value
Output Accuracy		$\pm 1.0\%$ max.
Line Regulation	$V_{in} = 16.5$ to 140V , $I_o = \text{full load}$	$\pm 0.01\%$ typ. to $\pm 0.2\%$ max.
Load Regulation	10 - 90% load	$\pm 0.05\%$ typ. to $\pm 0.2\%$ max.
Transient Response	25% load step change	12Vout 450mV/40 μs typ.
		15Vout 450mV/30 μs typ.
		24Vout 500mV/20 μs typ.
		48Vout 600mV/10 μs typ.

continued on next page

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

Accuracy vs. Load

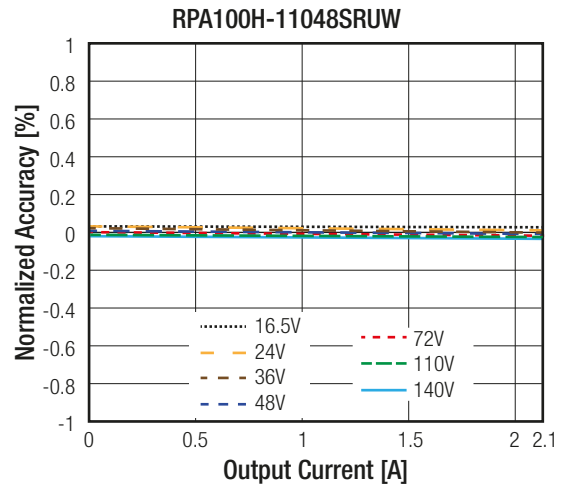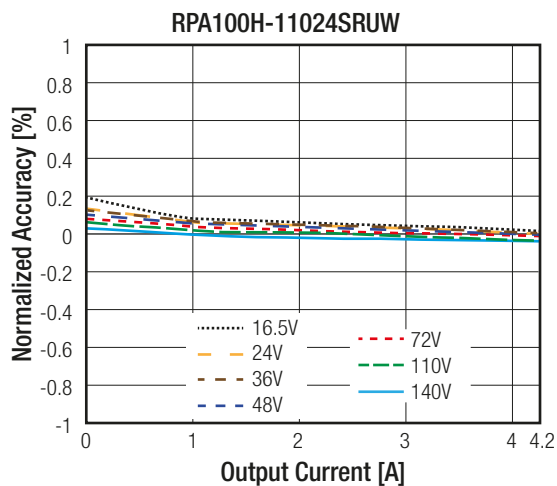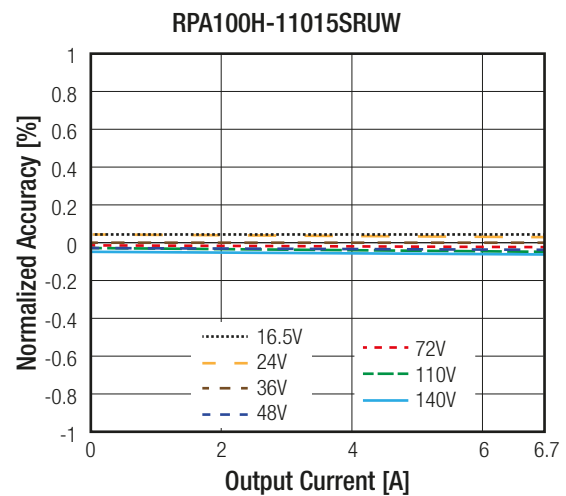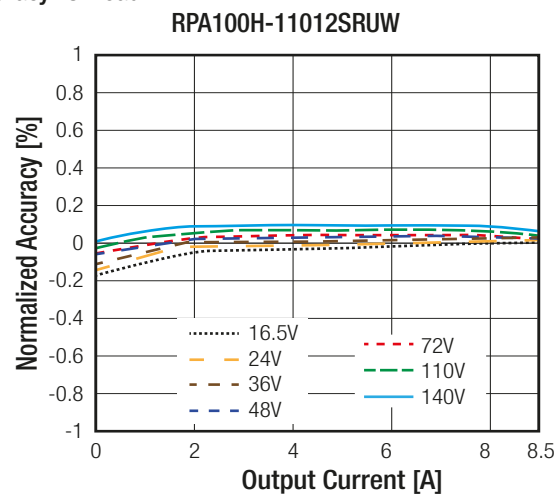

PROTECTION

Parameter	Condition			Value
Over Voltage Protection (OVP)				110-130%, automatic recovery
Over Current Protection (OCP)				hiccup mode, automatic recovery
Over Temperature Protection (OTP)	@ tc point			+105°C, automatic recovery after cooling down
Isolation Voltage ⁽⁷⁾	I/P to O/P, O/P to baseplate	rated for 1 minute	12, 15, 24Vout	4.242kVDC
			48Vout	3kVDC
Isolation Resistance				10MΩ typ.
Isolation Capacitance				500pF
Leakage Current				0.42mA
Insulation Grade				reinforced

Notes:

Note7: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note8: An input fuse is required if the mains supply is not over-current protected. Recommended fuse T20A slow blow type

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

ENVIRONMENTAL

Parameter	Condition	Value
Operating Temperature Range	refer to derating graphs	-40°C to +97°C
Maximum Baseplate Temperature		+100°C
Temperature Coefficient		0.007%/°C
Thermal Impedance		refer to Rth tables
Operating Altitude		5000m
Operating Humidity		5%-95% RH
Pollution Degree (PD)		PD2
Fire protection on Railway Vehicles	refer to page PB-9	according to EN45545-2 standard
MTBF	according to Telcordia SR332 Issue 2 Method I, 25°C	1480 x 10 ³ hours

Notes:

Note9: Following calculations are made with RPA100H-11012SRUW/P.
Test PCB: Eurocard 160x100mm 105µm copper, double layer

Thermal Derating with Fan Cooling, Double Layer PCB and Heat-sink

Thermal Impedance	
airflow [m/s]	Rth [°C/W]
0.1	3.3
0.2	2.62
0.5	2.0
0.8	1.57
1.0	1.22
1.5	0.75



Thermal Calculation Example

$I_{out} = 50\%$
 $R_{th} = 3.3^{\circ}\text{C/W}$
 $P_{DISS} = 7.87\text{W}$
 $T_{ICmax} = 100^{\circ}\text{C}$

$$T_{OVER} = R_{th} \times P_{DISS} = 3.3^{\circ}\text{C/W} \times 7.87\text{W} = +26^{\circ}\text{C}$$

$$T_{AMBmax} = T_{ICmax} - T_{OVER} = 100^{\circ}\text{C} - 26^{\circ}\text{C} = +74^{\circ}\text{C}$$

Dimension Drawing Heat-sink (mm)

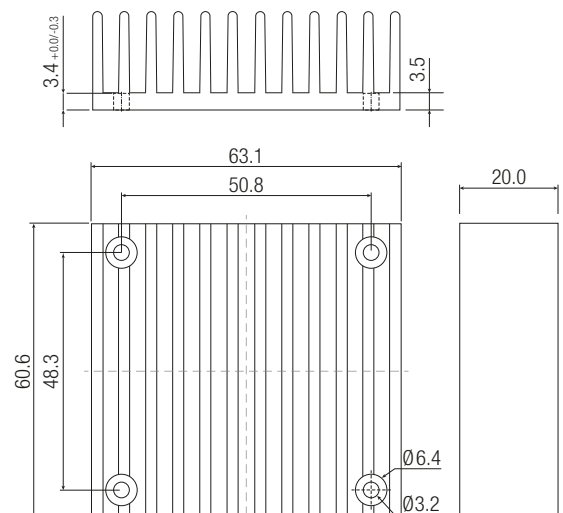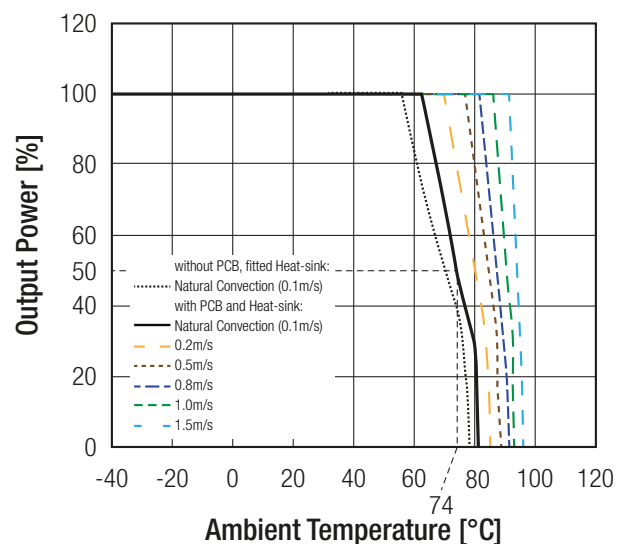

continued on next page

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

Thermal Derating with Fan Cooling and Double Layer PCB

Thermal Impedance	
airflow [m/s]	Rth [°C/W]
0.1	3.8
0.2	3.12
0.5	2.5
0.8	2.07
1.0	1.72
1.5	1.25

Thermal Calculation Example

$$I_{out} = 50\%$$

$$R_{th} = 2.5^{\circ}\text{C/W}$$

$$P_{DISS} = 7.87\text{W}$$

$$T_{ICmax} = 100^{\circ}\text{C}$$

$$T_{OVER} = R_{th} \times P_{DISS} = 2.5^{\circ}\text{C/W} \times 7.87\text{W} = +20^{\circ}\text{C}$$

$$T_{AMBmax} = T_{ICmax} - T_{OVER} = 100^{\circ}\text{C} - 20^{\circ}\text{C} = +80^{\circ}\text{C}$$

Thermal Derating with Water Cooling

Thermal Impedance	
liquid flow [l/min]	Rth [°C/W]
2.3	0.31

Thermal Calculation Example

$$I_{out} = 100\%$$

$$R_{th} = 0.31^{\circ}\text{C/W}$$

$$P_{DISS} = 10.94\text{W}$$



$$T_{ICmax} = 100^{\circ}\text{C}$$

$$T_{OVER} = R_{th} \times P_{DISS} = 0.31^{\circ}\text{C/W} \times 10.94\text{W} = +3.4^{\circ}\text{C}$$

$$T_{AMBmax} = T_{ICmax} - T_{OVER} = 100^{\circ}\text{C} - 3.4^{\circ}\text{C} = +97^{\circ}\text{C}$$

Notes:

Note10: For further details please contact our Tech Support Team techsupportAT@recom-power.com

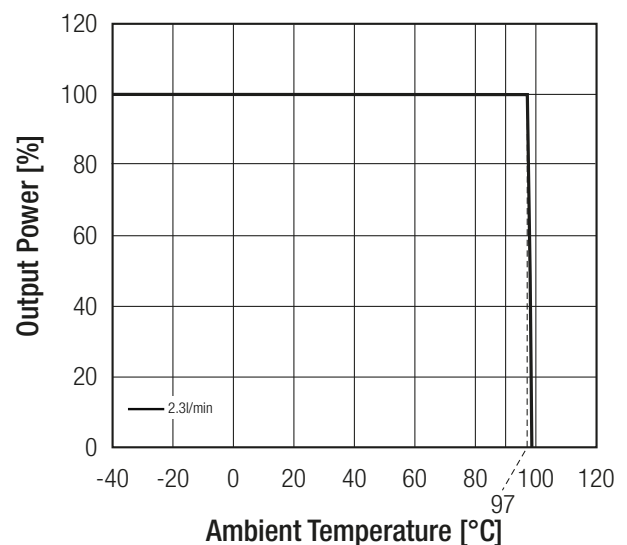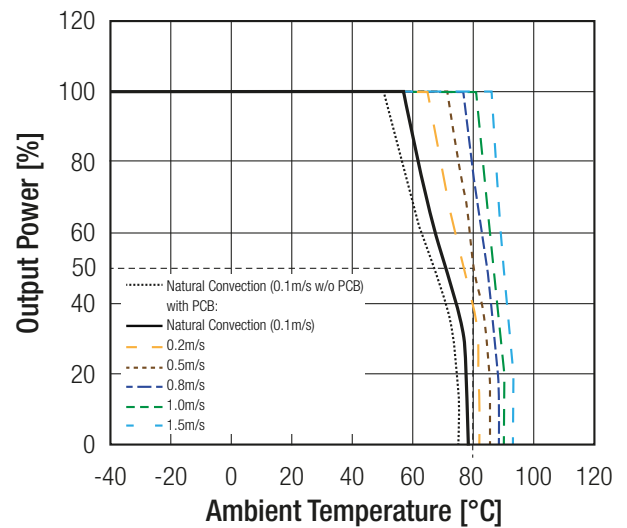

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	E224736-A54-UL and E224736-A57-UL	UL60950-1, 2nd Edition: 2014 CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition: 2014
IEC/EN Information Technology Equipment - General Requirements for Safety (CB Scheme)	E224736-A54-CB-1 and E224736-A57-CB-1	IEC60950-1: 2005, 2nd Edition + AM2: 2013
IEC/EN Information Technology Equipment - General Requirements for Safety		EN60950-1: 2006 + A2: 2013



continued on next page

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

Fire hazard testing - Part 11-10: Test flames - 50W horizontal and vertical flame test methods	Vertical Flame Test	EN60695-11-10: 2013, HL1, HL2, HL3, V-0
Fire hazard testing - Part 2-11: Glowing/hot-wire based test methods; Glow-wire flammability test method for end-products	Glow-Wire Flammability Test 30s ta, 850°C	EN60695-2-11:2000, HL1, HL2, HL3
Plastics - Determination of burning behaviour by oxygen index - Part 2: Ambient-temperature test	OI% (min) 42.6% OI% (min) 36.8%	EN ISO 4589-2:2006, HL1, HL2, HL3 EN ISO 4589-2:1999 + A1:2006, HL1, HL2, HL3
Railway Applications - Electrical Equipment used on rolling stock		EN50155:2007
Railway applications - Fire protection on railway vehicles Part 2: Requirements for fire behaviour of materials and components		EN45545-2:2013 + A1:2015
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS 2+		RoHS 2011/65/EU

EMC Compliance	Condition	Standard / Criterion
Railway applications - Electromagnetic compatibility - Part 3-2: Rolling stock - Apparatus	with external components	EN50121-3-2:2015
ESD Electrostatic discharge immunity test	Air ±8kV, Contact ±6kV	EN61000-4-2, Criteria B
Radiated, radio-frequency, electromagnetic field immunity test	80-1000MHz, 20V/m 800-1000MHz, 20V/m 1400-2100MHz, 10V/m 2100-2500MHz, 5V/m	EN61000-4-3, Criteria A
Fast Transient and Burst Immunity	±2kV	EN61000-4-4, Criteria A
Surge Immunity	±1kV (diff), ±2kV (com)	EN61000-4-5, Criteria B
Immunity to conducted disturbances, induced by radio-frequency fields	10V	EN61000-4-6, Criteria A
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external components	EN55032, Class B


EMC Filtering according to EN50121-3-2

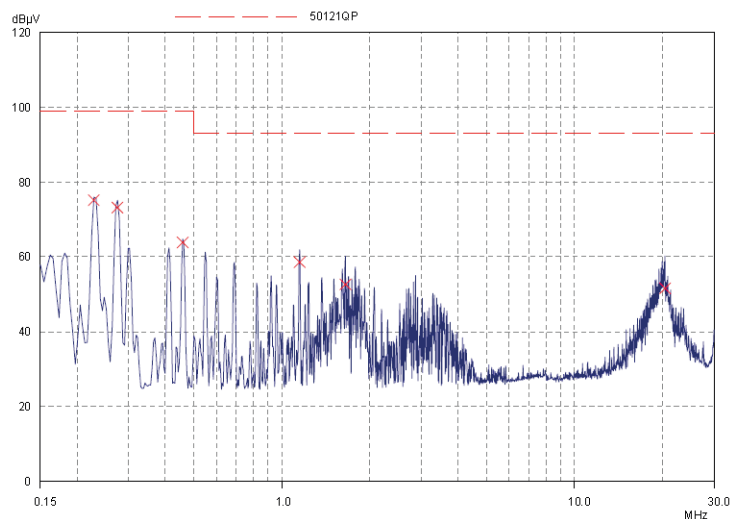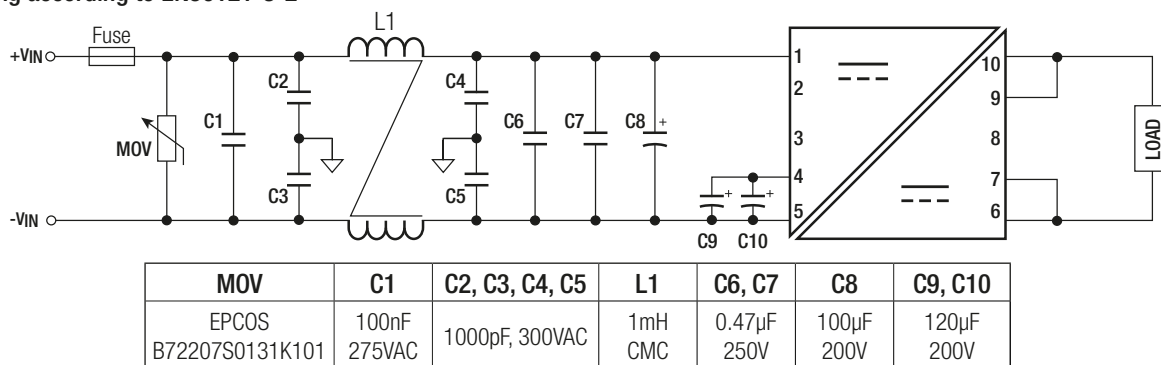


continued on next page

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

EMC Filtering according to EN55032 Class B

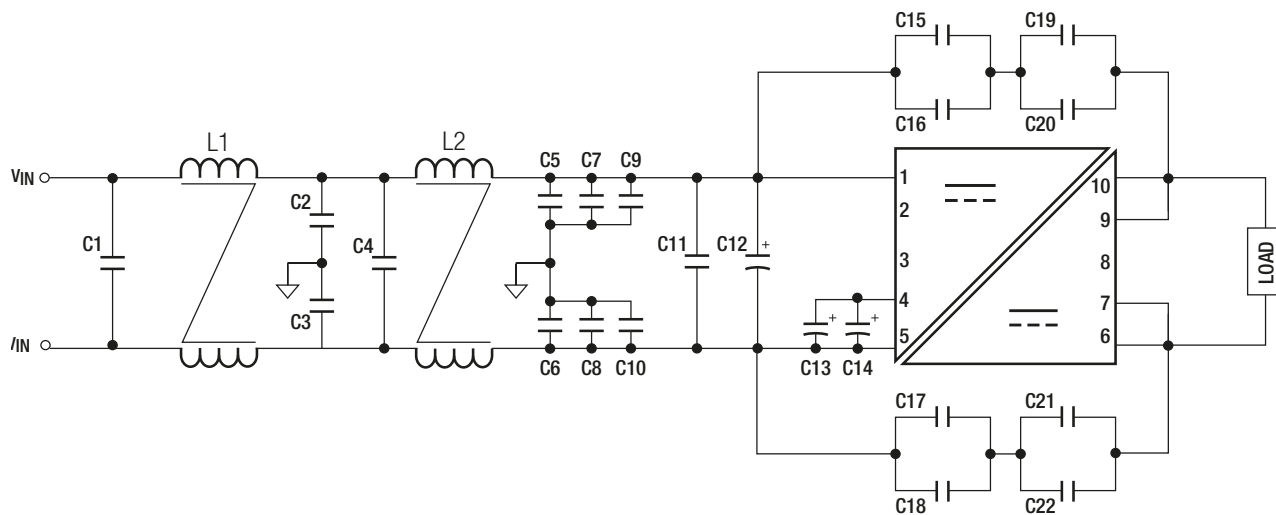

C1, C4, C11	L1, L2	C2, C3, C5, C6, C7, C8, C9, C10	C12	C13, C14	C15, C16, C17, C18, C19, C20
0.47µF, 250V MLCC	1mH CMC	1.5pF, 3kV	100µF 200V	120µF 200V	6.8pF, 2kV

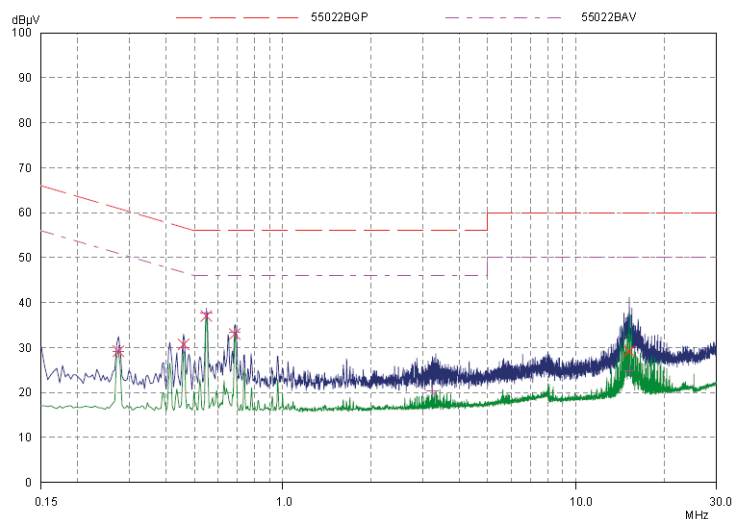





DIMENSIONS and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	baseplate case potting	aluminum plastic (UL94V-2) low smoke silicone (UL94V-0)
Package Dimensions (LxWxH)		60.6 x 63.1 x 13.0mm
Package Weight		125.0g typ.

continued on next page

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

Dimension Drawing (mm)

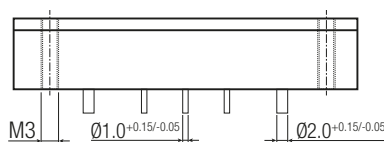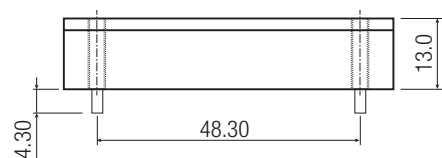
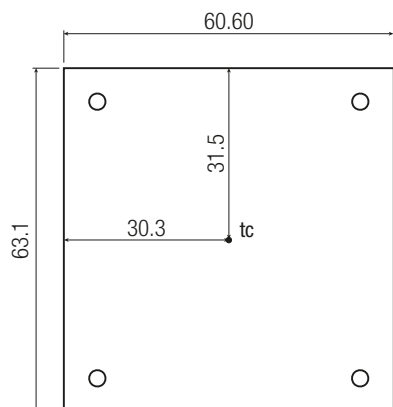


Pin Connections

Pin #	Single
1	+Vin
2	UVLO
3	CTRL
4	Ext. Cap.
5	-Vin
6	-Vout
7	-Sense
8	Trim
9	+Sense
10	+Vout

XX.X ± 0.5mm
XX.XX ± 0.25mm
FC= fixing center

Recommended Footprint Details

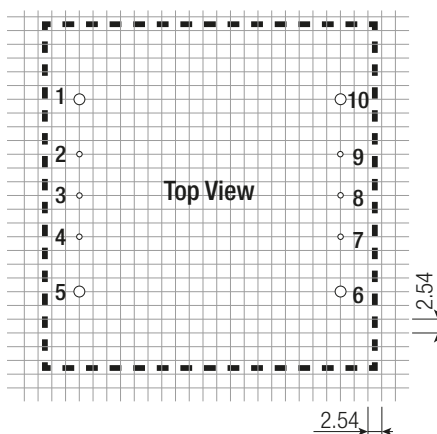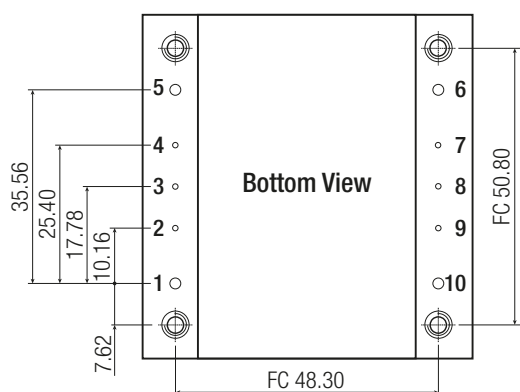

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimensions (LxWxH)	tube	355.0 x 63.5 x 20.6mm
Packaging Quantity		5pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity		95% RH

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.