



Features

- 200V/60A,
 $R_{DS(ON)} = 36m\Omega$ (Type) @ $V_{GS}=10V$
- Low Gate Charge
- Fast Switching
- 100% avalanche tested
- 175°C Operating Temperature
- Lead Free,RoHS compliant

Applications

- Switching Application

Pin Description

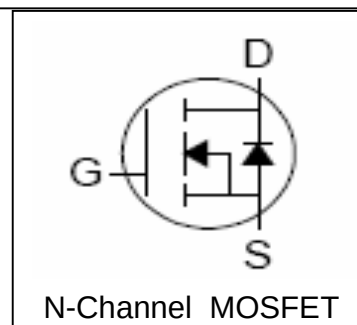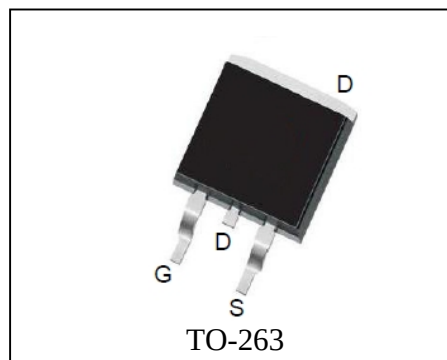

Absolute Maximum Ratings





Symbol	Parameter		Rating	Unit
Common Ratings (T _A =25°C Unless Otherwise Noted)				
V _{DSS}	Drain-Source Voltage		200	V
V _{GSS}	Gate-Source Voltage		±25	
T _J	Maximum Junction Temperature		175	°C
T _{STG}	Storage Temperature Range		-55 to 175	°C
I _S	Diode Continuous Forward Current	T _C =25°C	60	A
Mounted on Large Heat Sink				
I _{DP}	300μs Pulse Drain Current Tested	T _C =25°C	230 ^①	A
I _D	Continuous Drain Current	T _C =25°C	60 ^②	A
		T _C =100°C	45 ^②	
P _D	Maximum Power Dissipation	T _C =25°C	312	W
		T _C =100°C	156	
R _{θJC}	Thermal Resistance-Junction to Case		0.48	°C/W
Drain-Source Avalanche Ratings				
E _{AS} ^③	Avalanche Energy, Single Pulsed		140	mJ

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ Unless Otherwise Noted)

Symbol	Parameter	Test Condition	RU2H50S			Unit
			Min.	Typ.	Max.	
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	200			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 200V, V _{GS} =0V			1	μA
		T _J =85°C			30	
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	2	3	4	V
I _{GSS}	Gate Leakage Current	V _{GS} =±25V, V _{DS} =0V			±100	nA
R _{DS(ON)} ^④	Drain-Source On-state Resistance	V _{GS} = 10V, I _{DS} =28A		36	43	mΩ
Diode Characteristics						
V _{SD} ^④	Diode Forward Voltage	I _{SD} =28A, V _{GS} =0V			1.2	V
t _{rr}	Reverse Recovery Time	I _{SD} =28A, dI _{SD} /dt=100A/μs		212		ns
Q _{rr}	Reverse Recovery Charge			980		nC
Dynamic Characteristics ^⑤						
R _G	Gate Resistance	V _{GS} =0V,V _{DS} =0V,F=1MHz		3.8		Ω
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =50V, Frequency=1.0MHz		4550		pF
C _{oss}	Output Capacitance			620		
C _{rss}	Reverse Transfer Capacitance			155		
t _{d(ON)}	Turn-on Delay Time	V _{DD} =100V, R _L =35Ω, I _{DS} =28A, V _{GEN} = 10V, R _G =6Ω		18		ns
t _r	Turn-on Rise Time			70		
t _{d(OFF)}	Turn-off Delay Time			56		
t _f	Turn-off Fall Time			45		
Gate Charge Characteristics ^⑤						
Q _g	Total Gate Charge	V _{DS} =160V, V _{GS} = 10V, I _{DS} =28A		160	208	nC
Q _{gs}	Gate-Source Charge			29		
Q _{gd}	Gate-Drain Charge			70		


- Notes:
- ① Pulse width limited by safe operating area.
 - ② Calculated continuous current based on maximum allowable junction temperature. Current limited by bond wire.
 - ③ Limited by $T_{Jmax}, I_{AS}=20A, V_{DD}=60V, R_G=47\Omega$, Starting $T_J=25^{\circ}\text{C}$.
 - ④ Pulse test; Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
 - ⑤ Guaranteed by design, not subject to production testing.

Typical Characteristics

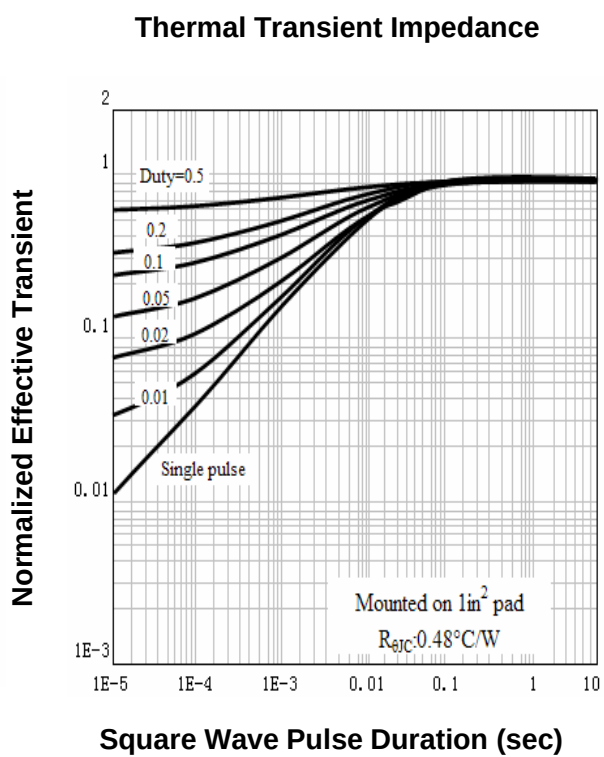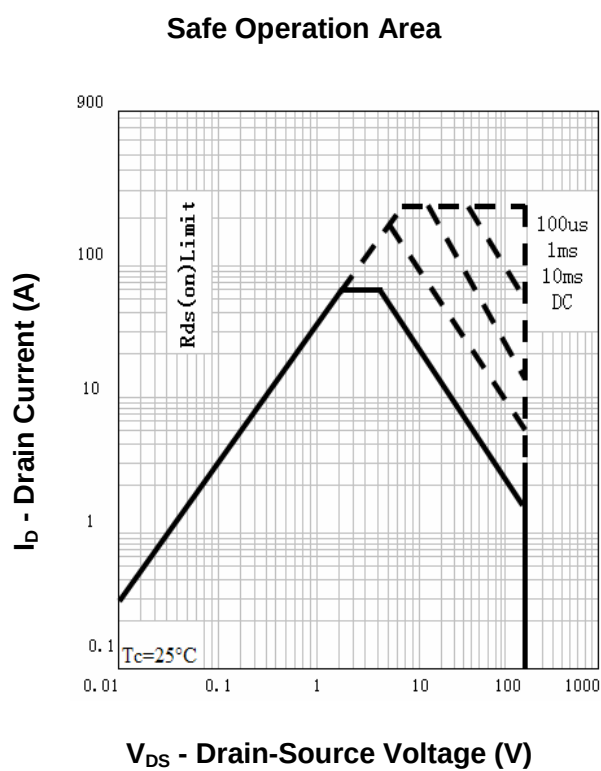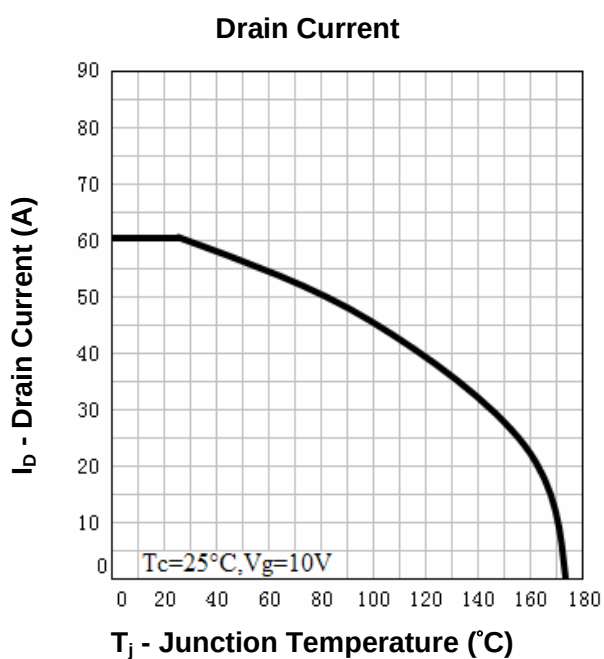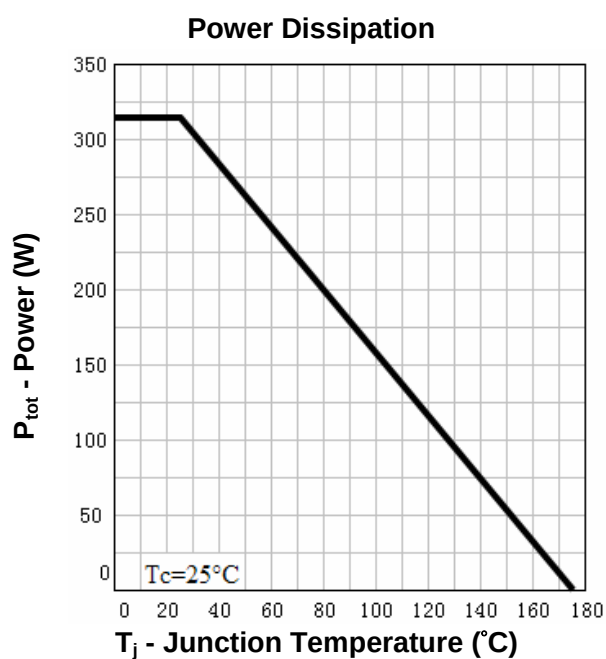


Typical Characteristics


Output Characteristics

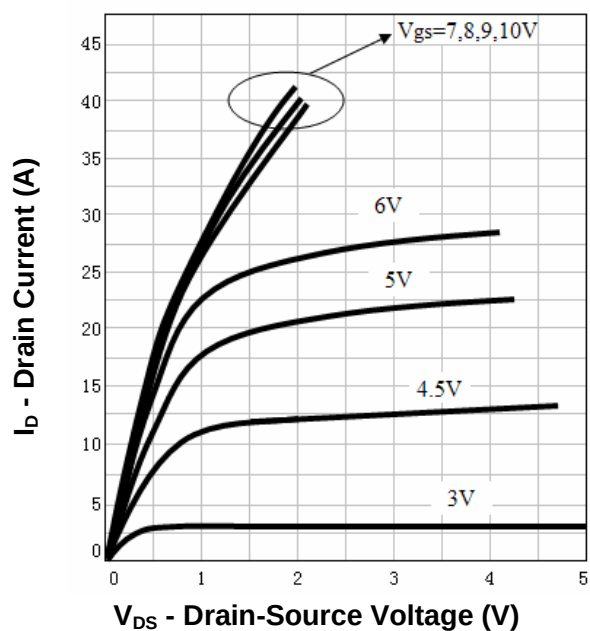


Drain-Source On Resistance

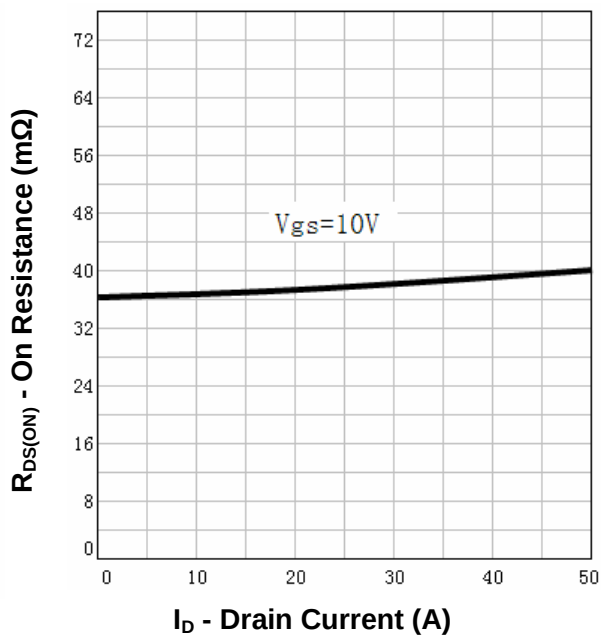

Drain-Source On Resistance

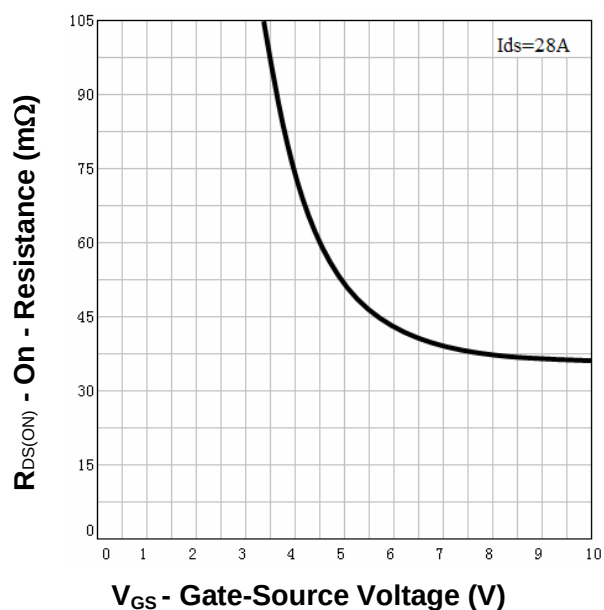


Gate Threshold Voltage

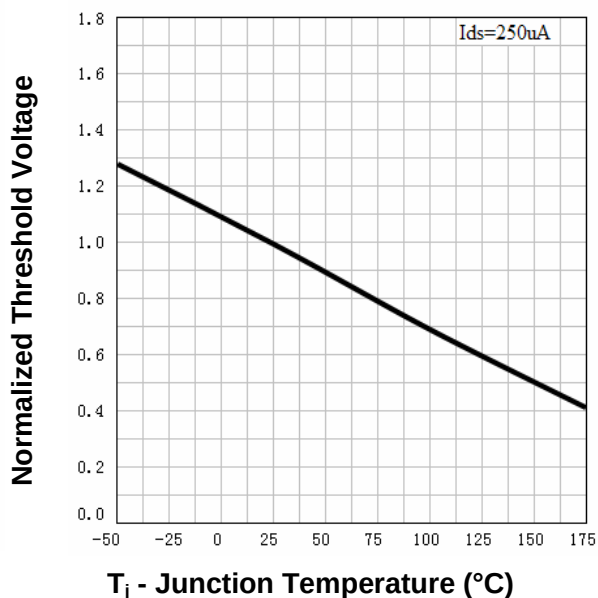


Typical Characteristics


Drain-Source On Resistance

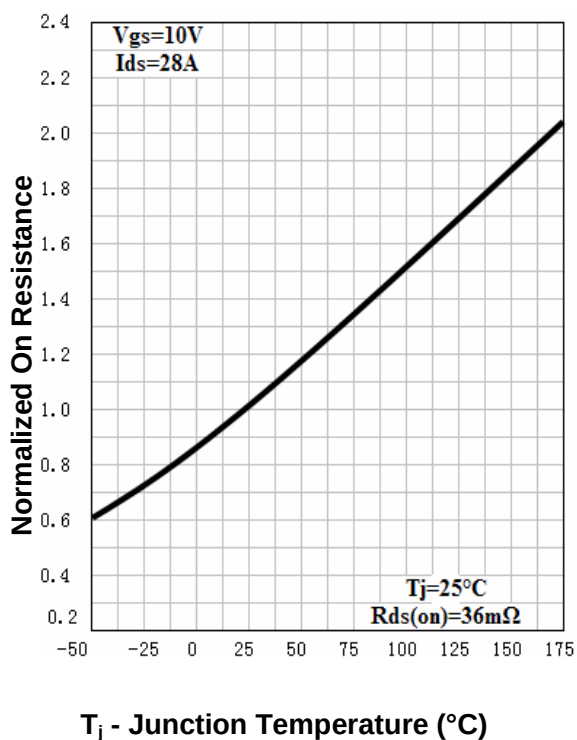


Source-Drain Diode Forward

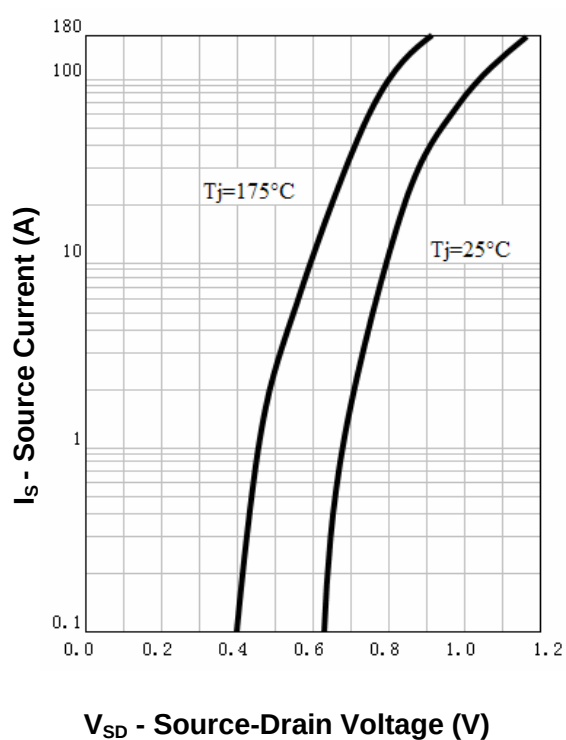



Capacitance

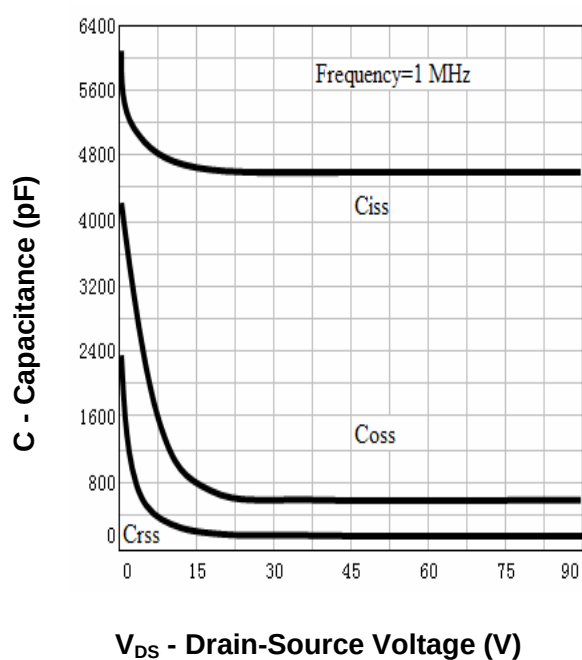



Gate Charge

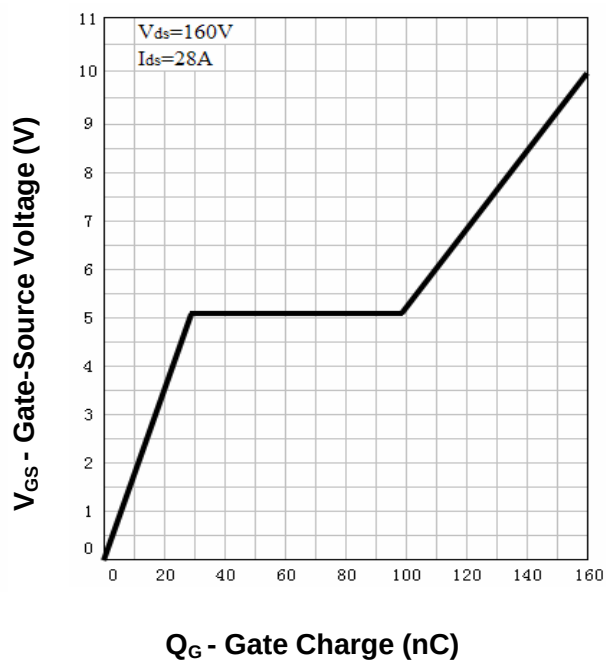

Avalanche Test Circuit and Waveforms

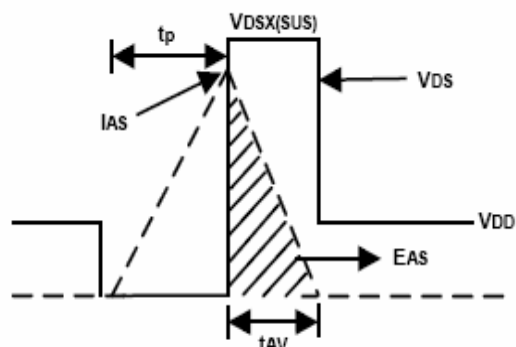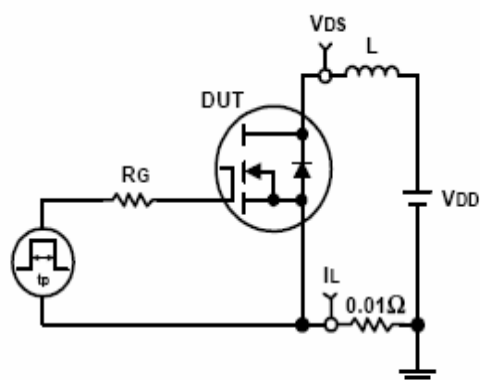

Switching Time Test Circuit and Waveforms

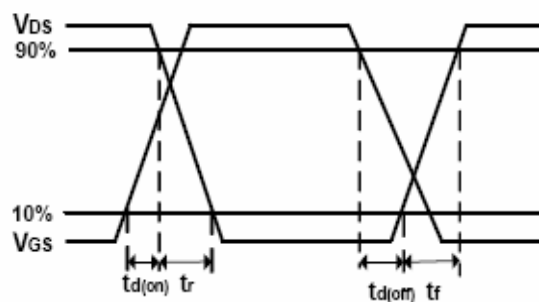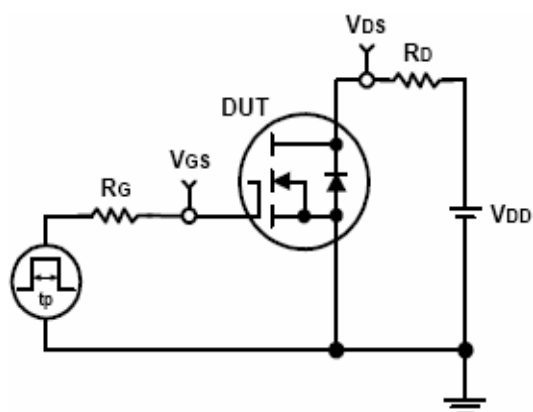


Ordering and Marking Information

Device	Marking	Package	Packaging	Quantity	Reel Size	Tape width
RU2H50S	RU2H50S	TO-263	Tube	50	-	-

Package Information

TO-263-2L

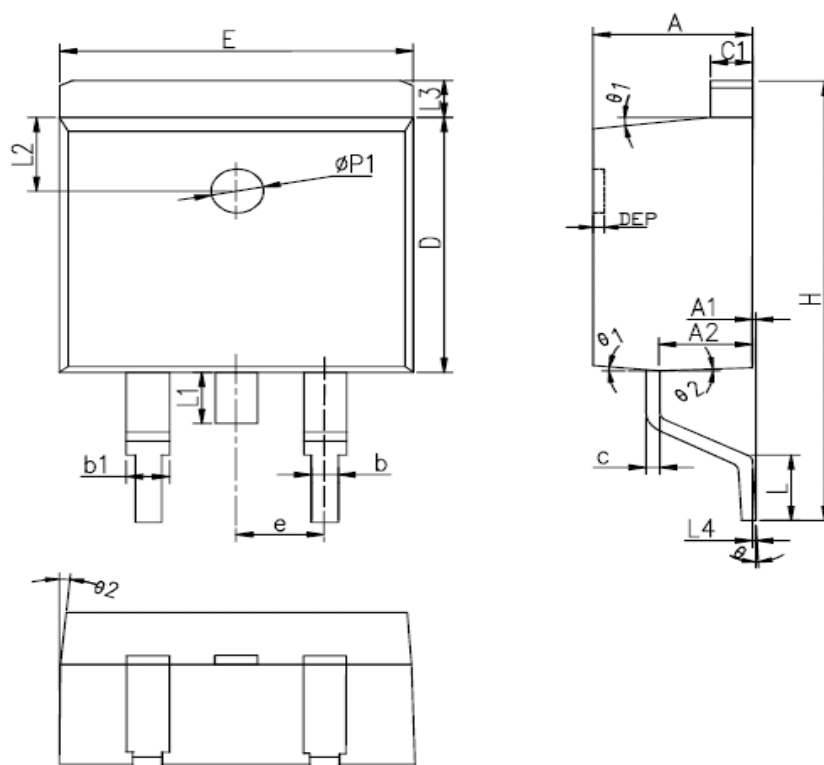

SYMBOL	MM			INCH			SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX		MIN	NOM	MAX	MIN	NOM	MAX
A	4.40	4.57	4.70	0.173	0.180	0.185	L	2.00	2.30	2.60	0.079	0.090	0.102
A1	0	0.10	0.25	0	0.004	0.010	L3	1.17	1.27	1.40	0.046	0.050	0.055
A2	2.59	2.69	2.79	0.102	0.106	0.110	L1	-	-	1.70	-	-	0.067
b	0.77	-	0.90	0.030	-	0.035	L4	0.25BSC			0.01BSC		
b1	1.23	-	1.36	0.048	-	0.052	L2	2.50REF.			0.098REF.		
c	0.34	-	0.47	0.013	-	0.019	θ	0°	-	8°	0°	-	8°
C1	1.22	-	1.32	0.048	-	0.052	θ 1	5°	7°	9°	5°	7°	9°
D	8.60	8.70	8.80	0.338	0.343	0.346	θ 2	1°	3°	5°	1°	3°	5°
E	10.00	10.16	10.26	0.394	0.4	0.404	DEP	0.05	0.10	0.20	0.002	0.004	0.008
e	2.54BSC			0.1BSC			Øp1	1.40	1.50	1.60	0.055	0.059	0.063
H	14.70	15.10	15.50	0.579	0.594	0.610							

ALL DIMENSIONS REFER TO JEDEC STANDARD
DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS

Customer Service

Worldwide Sales and Service:

Sales@ruichips.com

Technical Support:

Technical@ruichips.com

Investor Relations Contacts:

Investor@ruichips.com

Marcom Contact:

Marcom@ruichips.com

Editorial Contact:

Editorial@ruichips.com

HR Contact:

HR@ruichips.com

Legal Contact:

Legal@ruichips.com

Shen Zhen RUICHIPS Semiconductor CO., LTD

Room 501, the 5floor An Tong Industrial Building,
NO.207 Mei Hua Road Fu Tian Area Shen Zhen City, CHINA

TEL: (86-755) 8311-5334

FAX: (86-755) 8311-4278

E-mail: Sales-SZ@ruichips.com