


CE32 Type

Features


- Vertical chip type miniaturized for 5.5mm, high capacitors

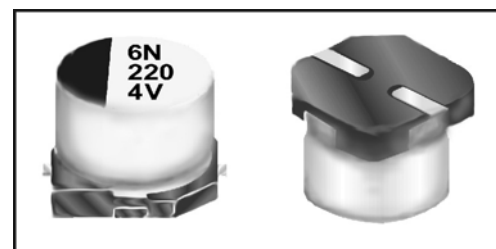

SPECIFICATIONS

Items	Performance																																							
Operating Temperature Range	-40℃ ~ +85℃																																							
Capacitance Tolerance	±20% (at 120Hz, 20℃)																																							
Leakage Current (at 20℃)	I = 0.01CV or 3 (μ A) whichever is greater (after 2 minutes) Where, C= rated capacitance in μ F. V = rated DC working voltage in V.																																							
Dissipation Factor (Tan δ at 120Hz, 20℃)	<table><tr><td>Rated Voltage</td><td>4</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>Tan δ (max)</td><td>0.42</td><td>0.28</td><td>0.24</td><td>0.20</td><td>0.14</td><td>0.12</td><td>0.10</td></tr></table>								Rated Voltage	4	6.3	10	16	25	35	50	Tan δ (max)	0.42	0.28	0.24	0.20	0.14	0.12	0.10																
Rated Voltage	4	6.3	10	16	25	35	50																																	
Tan δ (max)	0.42	0.28	0.24	0.20	0.14	0.12	0.10																																	
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below. <table><tr><td colspan="2">Rated Voltage</td><td>4</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td rowspan="2">Impedance Ratio</td><td>Z(-25℃)/Z(+20℃)</td><td>7</td><td>3</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-40℃)/Z(+20℃)</td><td>15</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td><td>3</td></tr></table>								Rated Voltage		4	6.3	10	16	25	35	50	Impedance Ratio	Z(-25℃)/Z(+20℃)	7	3	3	2	2	2	2	Z(-40℃)/Z(+20℃)	15	8	5	4	3	3	3						
Rated Voltage		4	6.3	10	16	25	35	50																																
Impedance Ratio	Z(-25℃)/Z(+20℃)	7	3	3	2	2	2	2																																
	Z(-40℃)/Z(+20℃)	15	8	5	4	3	3	3																																
Load Life Test	<table><tr><td>Test Time</td><td colspan="7">2000 Hrs</td></tr><tr><td>Capacitance Change</td><td colspan="7">Within ±20% of initial value (4WV : ±30%)</td></tr><tr><td>Dissipation Factor</td><td colspan="7">Less than 200% of specified value (4WV : 300%)</td></tr><tr><td>Leakage Current</td><td colspan="7">Within specified value</td></tr></table> * The above specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied for 2000 hrs at 85℃.								Test Time	2000 Hrs							Capacitance Change	Within ±20% of initial value (4WV : ±30%)							Dissipation Factor	Less than 200% of specified value (4WV : 300%)							Leakage Current	Within specified value						
Test Time	2000 Hrs																																							
Capacitance Change	Within ±20% of initial value (4WV : ±30%)																																							
Dissipation Factor	Less than 200% of specified value (4WV : 300%)																																							
Leakage Current	Within specified value																																							
Shelf Life Test	Test time: 1000 hrs; other items are the same as those for the load life test.																																							
Ripple Current & Frequency Multipliers	<table><tr><td>Freq.(Hz) V.DC(V)</td><td>50</td><td>120</td><td>1K</td><td>10K up</td></tr><tr><td>Under 16</td><td>0.8</td><td>1.0</td><td>1.15</td><td>1.25</td></tr><tr><td>25 ~ 35</td><td>0.8</td><td>1.0</td><td>1.25</td><td>1.40</td></tr><tr><td>50</td><td>0.8</td><td>1.0</td><td>1.35</td><td>1.50</td></tr></table>								Freq.(Hz) V.DC(V)	50	120	1K	10K up	Under 16	0.8	1.0	1.15	1.25	25 ~ 35	0.8	1.0	1.25	1.40	50	0.8	1.0	1.35	1.50												
Freq.(Hz) V.DC(V)	50	120	1K	10K up																																				
Under 16	0.8	1.0	1.15	1.25																																				
25 ~ 35	0.8	1.0	1.25	1.40																																				
50	0.8	1.0	1.35	1.50																																				
Other Standards	JIS C 5101-18																																							

DIAGRAM OF DIMENSIONS

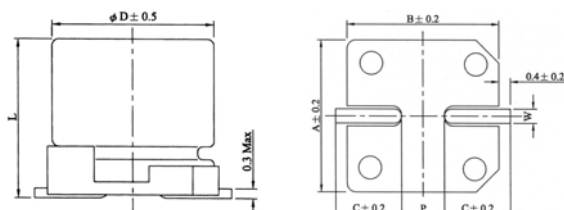

Unit: mm

φ D	L	A	B	C	W	P±0.2
4	5.3±0.2	4.3	4.3	2.0	0.5 to 0.8	1.0
5	5.3±0.2	5.3	5.3	2.3	0.5 to 0.8	1.5
6.3	5.3±0.2	6.6	6.6	2.7	0.5 to 0.8	2.0

DIMENSION & PERMISSIBLE RIPPLE CURRENT

Dimension: φ D × L(mm)

Ripple Current: mA/rms at 120 Hz, 85°C

V.DC μF	Contents	4V (0G)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
		φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D	mA
0.1	0R1													4×5.3	3
0.22	R22													4×5.3	5
0.33	R33													4×5.3	6
0.47	R47													4×5.3	7
1	010													4×5.3	10
2.2	2R2													4×5.3	15
3.3	3R3													4×5.3	19
4.7	4R7									4×5.3	19	4×5.3	20	5×5.3	26
10	100					4×5.3	23	4×5.3	26	5×5.3	32	5×5.3	34	6.3×5.3	44
22	220			4×5.3	31	5×5.3	39	5×5.3	44	5×5.3	55	6.3×5.3	59		
33	330	4×5.3	31	5×5.3	44	5×5.3	48	6.3×5.3	63	6.3×5.3	67				
47	470	4×5.3	37	5×5.3	52	6.3×5.3	67	6.3×5.3	75						
100	101	5×5.3	63	6.3×5.3	89	6.3×5.3	98	6.3×5.3	103						
220	221	6.3×5.3	110												

Remark: VE2 is the new series name, RV2 is still effective.