

## Switchmode Schottky Barrier Power Rectifiers

Using the Schottky Barrier principle with high temperature operation metal. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical application are in switching Mode Power Supplies such as adaptators, Photovoltaic Solar cell protection, free-wheeling and polarity protection diodes.

### Features


- \* Ultra Low Forward Voltage.
- \* Low Switching noise.
- \* High Current Capacity
- \* Low Power Loss & High efficiency.
- \* 150°C Operating Junction Temperature
- \* Low Stored Charge Majority Carrier Conduction.
- \* Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O




\* In compliance with EU RoHs 2002/95/EC directives

### SCHOTTKY BARRIER RECTIFIERS

**30 AMPERES  
60VOLTS**



TO-220AB



DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.32
B	9.78	10.42
C	5.02	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	2.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.98
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

### MAXIMUM RATINGS


Characteristic	Symbol	S30C60CL	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	60	V
RMS Reverse Voltage	$V_{R(RMS)}$	42	V
Average Rectifier Forward Current (per diode) Total Device (Rated $V_R$ ), $T_C=125^\circ\text{C}$	$I_{F(AV)}$	15 30	A
Peak Repetitive Forward Current (Rate $V_R$ , Square Wave, 20kHz)	$I_{FM}$	30	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfware, single phase, 60Hz)	$I_{FSM}$	275	A
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-65 to +150	°C

### THERMAL RESISTANCES

Typical Thermal Resistance junction to case( per diode )	$R_{\theta J-C}$	3.0	°C/w
--	------------------	-----	------

### ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	S30C60CL			Unit
		Min	Typ.	Max.	
Maximum Instantaneous Forward Voltage ( per diode ) ( $I_F=0.1$ Amp $T_C=25^\circ\text{C}$ ) ( $I_F=7.5$ Amp $T_C=25^\circ\text{C}$ ) ( $I_F=15$ Amp $T_C=25^\circ\text{C}$ )	$V_F$	---	0.24 0.44 0.50	0.30 0.48 0.59	V
Maximum Instantaneous Reverse Current ( Rated DC Voltage, $T_C=25^\circ\text{C}$ ) ( Rated DC Voltage, $T_C=100^\circ\text{C}$ )	$I_R$		0.5 30		mA



# S30C60CL

FIG-1 FORWARD CURRENT DERATING CURVE

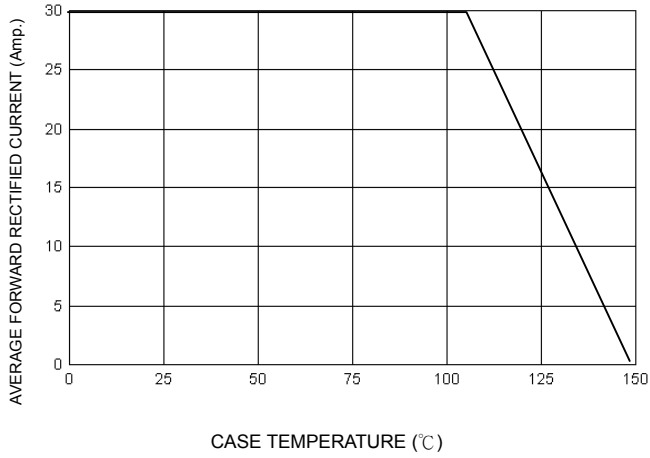


FIG-2 TYPICAL FORWARD CHARACTERISTICS

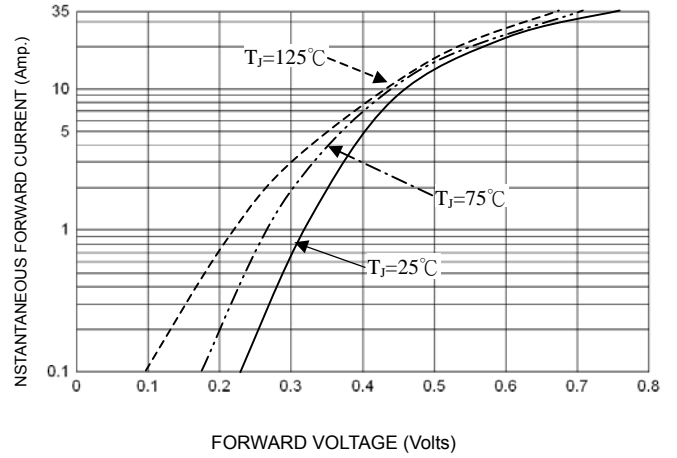


FIG-3 TYPICAL REVERSE CHARACTERISTICS

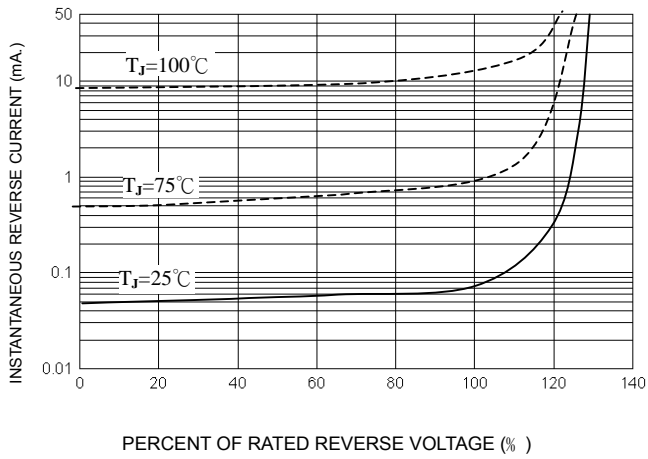


FIG-4 TYPICAL JUNCTION CAPACITANCE

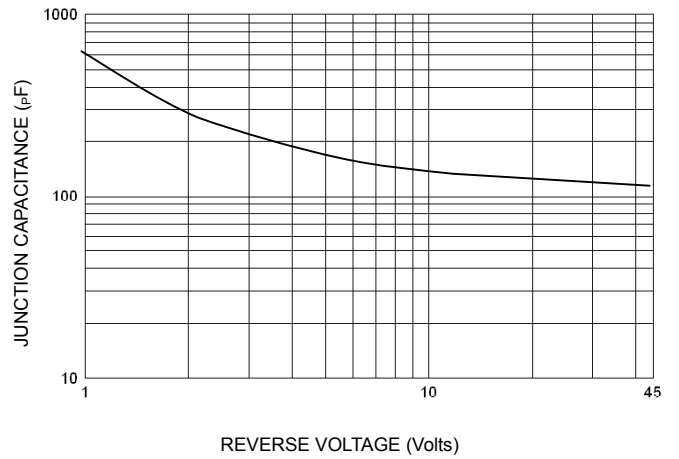


FIG-5 PEAK FORWARD SURGE CURRENT

