

## Switchmode Dual Schottky Barrier Power Rectifiers

Using the Schottky Barrier principle with high temperature operation metal. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical application are in switching Mode Power Supplies such as adaptators, Photovoltaic Solar cell protection, free-wheeling and polarity protection diodes.

### Features


- \* Ultra Low Forward Voltage.
- \* Low Switching noise.
- \* High Current Capacity
- \* Low Power Loss & High efficiency.
- \* 150°C Operating Junction Temperature
- \* Low Stored Charge Majority Carrier Conduction.
- \* Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O



\* In compliance with EU RoHs 2002/95/EC directives

### SCHOTTKY BARRIER RECTIFIERS

**40 AMPERES  
60VOLTS**



TO-3P

### MAXIMUM RATINGS


Characteristic	Symbol	S40D60CL	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	60	V
RMS Reverse Voltage	$V_{R(RMS)}$	42	V
Average Rectifier Forward Current (per diode) Total Device (Rated $V_R$ ), $T_C=100^\circ\text{C}$	$I_{F(AV)}$	20 40	A
Peak Repetitive Forward Current (Rate $V_R$ , Square Wave, 20kHz)	$I_{FM}$	40	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfware, single phase, 60Hz)	$I_{FSM}$	300	A
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-65 to +150	°C

### THERMAL RESISTANCES


Maximum Thermal Resistance junction to case	$R_{\theta J-C}$	3.2	°C/w
---	------------------	-----	------

### ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	S40D60CL			Unit
		Min	Typ.	Max.	
Maximum Instantaneous Forward Voltage ( per diode ) ( $I_F=0.1$ Amp $T_C=25^\circ\text{C}$ ) ( $I_F=10$ Amp $T_C=25^\circ\text{C}$ ) ( $I_F=20$ Amp $T_C=25^\circ\text{C}$ )	$V_F$	---	0.24 0.44 0.55	0.28 0.48 0.60	V
Maximum Instantaneous Reverse Current ( Rated DC Voltage, $T_C=25^\circ\text{C}$ ) ( Rated DC Voltage, $T_C=100^\circ\text{C}$ )	$I_R$		0.5	50	mA



DIM	MILLIMETERS	
	MIN	MAX
A	20.63	22.38
B	15.38	16.20
C	1.90	2.70
D	5.10	6.10
E	14.81	15.22
F	11.72	12.84
G	4.20	4.50
H	1.82	2.46
I	2.92	3.23
J	0.89	1.53
K	5.26	5.66
L	18.50	21.50
M	4.68	5.36
N	2.40	2.80
O	3.25	3.65
P	0.55	0.70



# S40D60CL

FIG-1 FORWARD CURRENT DERATING CURVE

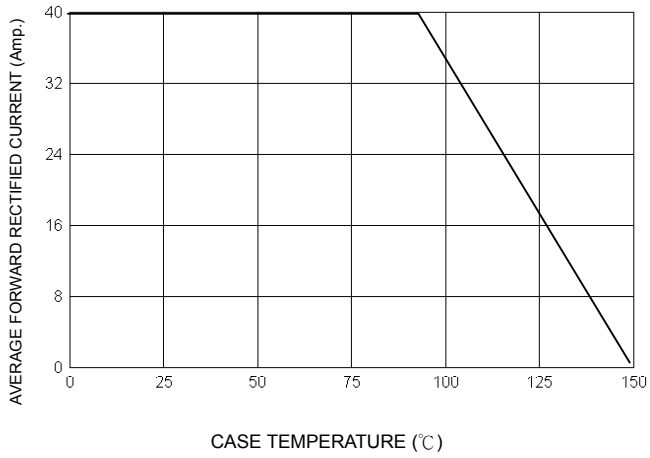


FIG-2 TYPICAL FORWARD CHARACTERISTICS

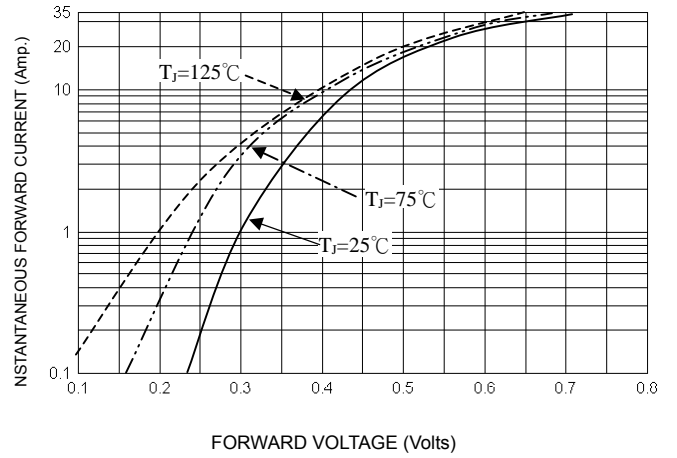


FIG-3 TYPICAL REVERSE CHARACTERISTICS

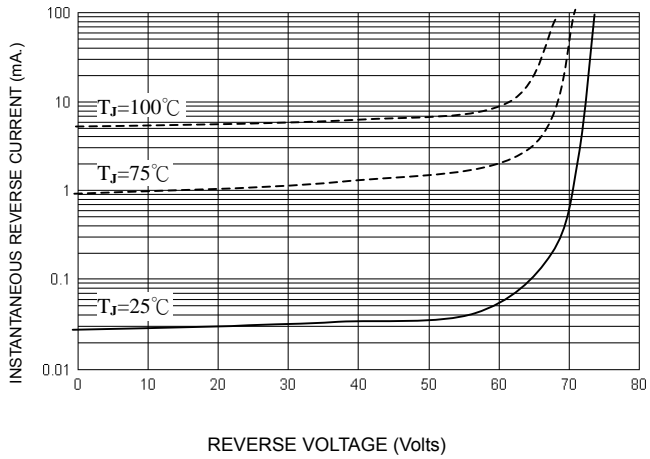


FIG-4 TYPICAL JUNCTION CAPACITANCE

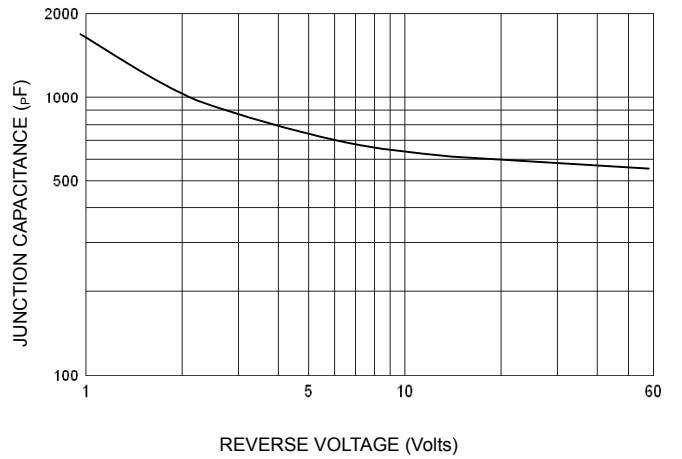


FIG-5 PEAK FORWARD SURGE CURRENT

