


Reverse Voltage 35 to 100V Forward Current 20A

Feature & Dimensions

- * Plastic package has underwriters laboratory
Flammability classification 94V-0
- * Low power loss,high efficiency
- * For use in low voltage high frequency inverters,
free wheeling,and polarity protection applications
- * Guarding for over voltage protection
- * High temperature soldering guaranteed:
260°C/10 seconds at terminals

Mechanical Data

Case : JEDEC R-6, molded plastic over sky die
Terminals : Plated axial leads, solderable per
MIL-STD-750, Method 2026
Polarity : Color band denotes cathode end
Weight : 0.042oz., 1.19 g
Mounting position : Any
Handling precautin : None

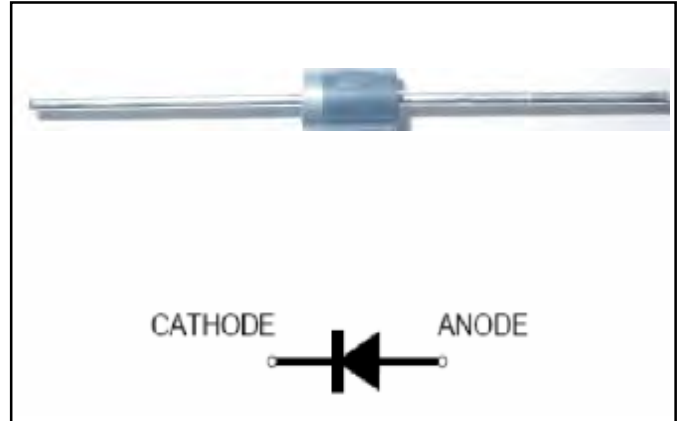

We declare that the material of product compliance
with ROHS requirements

1.Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter symbol	Symbol	SB2035	SB2045	SB2050	SB2060	SB2080	SB20100	Unit
Device marking code		SB2035	SB2045	SB2050	SB2060	SB2080	SB20100	
Maximum repetitive peak reverse voltage	V_{RRM}	35	45	50	60	80	100	V
Maximum RMS voltage	V_{RMS}	35	45	50	60	80	100	V
Maximum DC blocking voltage	V_{DC}	35	45	50	60	80	100	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (See fig. 1)	$I_F(AV)$	20.0						A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM1}	230						A
Thermal resistance, junction to ambient	$R_{\theta JA}$	40						°C/W
Operating junction and storage temperature range	T_J, T_{STG}	-40 to +150						°C

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter symbol	Symbol	SB2035	SB2045	SB2050	SB2060	SB2080	SB20100	Unit
Maximum instantaneous forward voltage at 20.0A	V_F	0.55		0.60	0.70	0.90		V
Maximum DC reverse current $T_C = 25^\circ C$	I_r	200						uA
Maximum DC reverse current $T_C = 100^\circ C$	I_r	1000						uA
Typical junction capacitance at 4.0V, 1MHz	C_J	500			380			PF

Notes:

1. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

2. Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

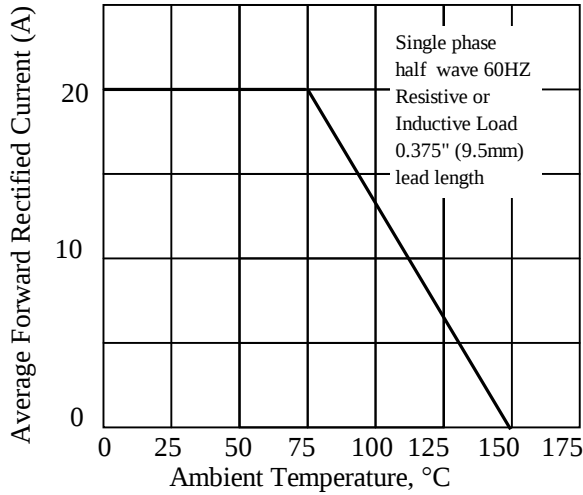


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

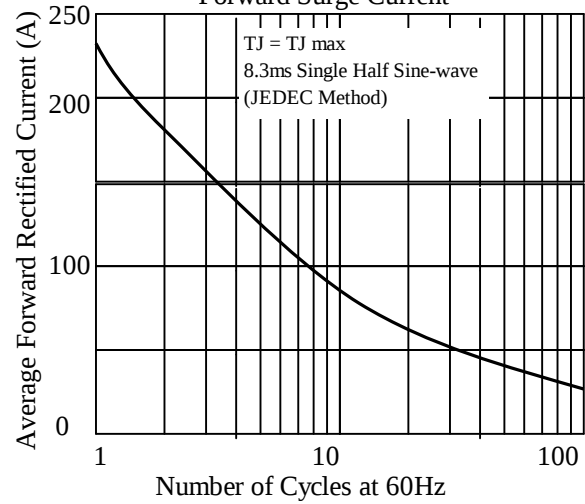


Fig 3. - Typical Instantaneous Forward Characteristics

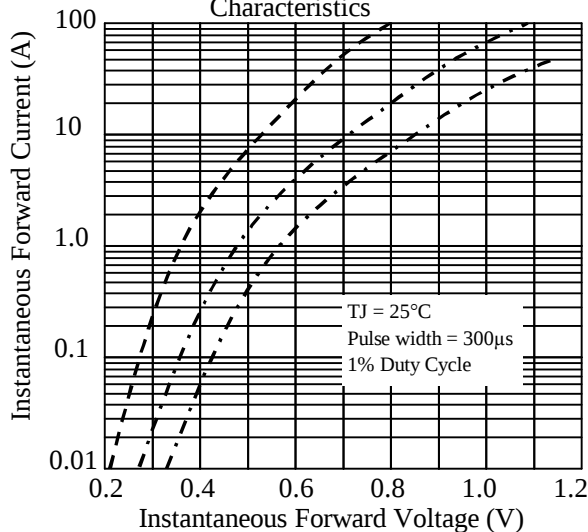


Fig 4. - Typical Reverse Characteristics

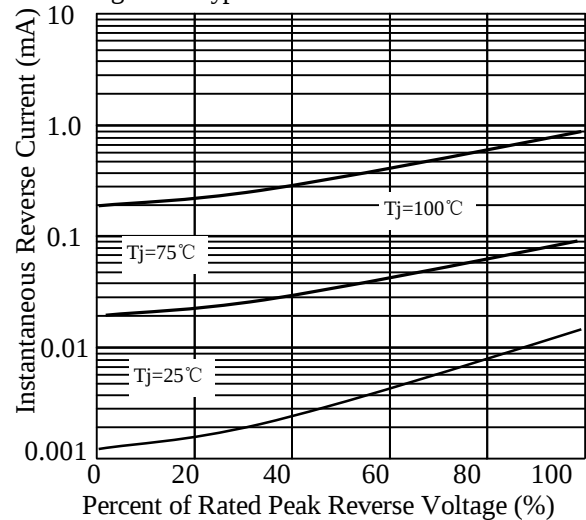


Fig 5. - typical transient thermal impedance


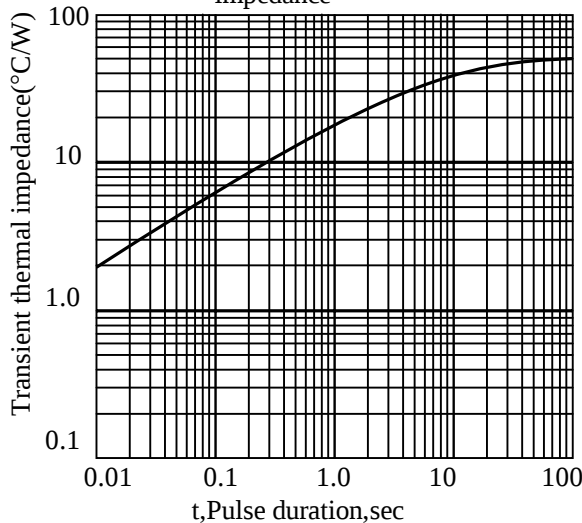


Fig 6. - Typical Junction Capacitance



3. dimension:

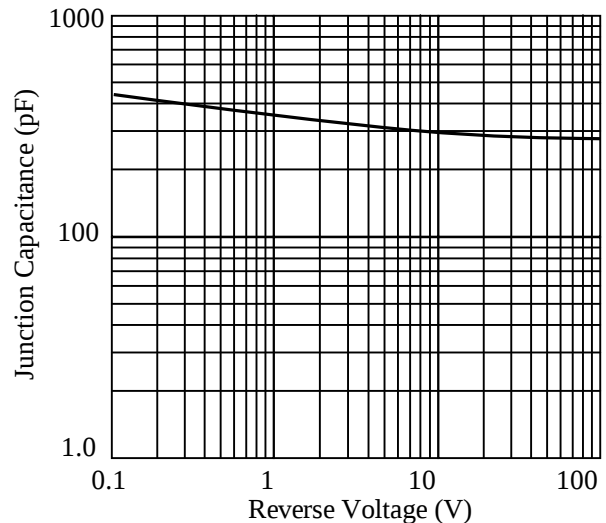