

SB315SVF - SB330SVF

PRV : 15 - 30 Volts
Io : 3.0 Amperes


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * High efficiency
- * Low power loss
- * Low forward voltage drop
- * **Pb / RoHS Free**

MECHANICAL DATA :

- * Case : DO-201AD Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 1.16 grams

SCHOTTKY BARRIER RECTIFIER DIODES

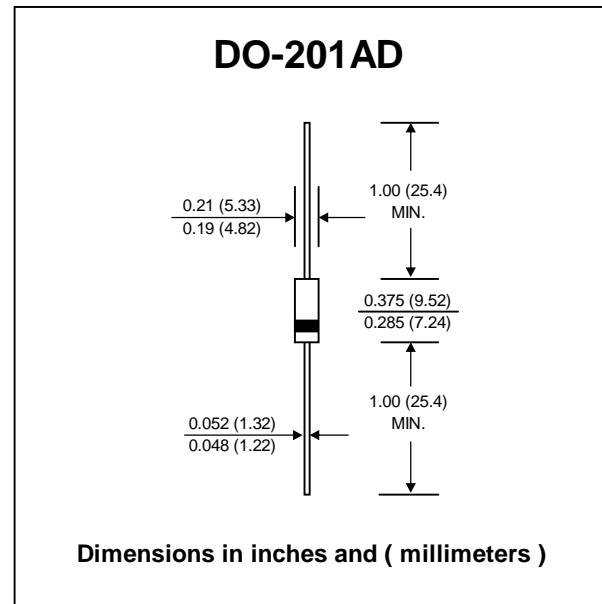

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

RATING	SYMBOL	SB315SVF	SB330SVF	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	15	30	V
Maximum RMS Voltage	V _{RMS}	11	21	V
Maximum DC Blocking Voltage	V _{DC}	15	30	V
Maximum Average Forward Current 0.375", 9.5mm Lead Length See Fig.1	I _{F(AV)}	3.0		A
Maximum Peak Forward Surge Current, 8.3ms single half sine wave Superimposed on rated load (JEDEC Method)	I _{FSM}	80		A
Maximum Forward Voltage at I _F = 3.0 A	V _F	0.39	0.40	V
Maximum Reverse Current at Ta = 25 °C	I _R	0.5		mA
Rated DC Blocking Voltage (Note 1) Ta = 100 °C	I _{R(H)}	20		mA
Junction Temperature Range	T _J	- 65 to + 125		°C
Storage Temperature Range	T _{STG}	- 65 to + 150		°C

Note :

(1) Pulse Test : Pulse Width = 300 μs, Duty Cycle = 2%

RATING AND CHARACTERISTIC CURVES (SB315SVF - SB330SVF)

FIG.1 - FORWARD CURRENT DERATING CURVE

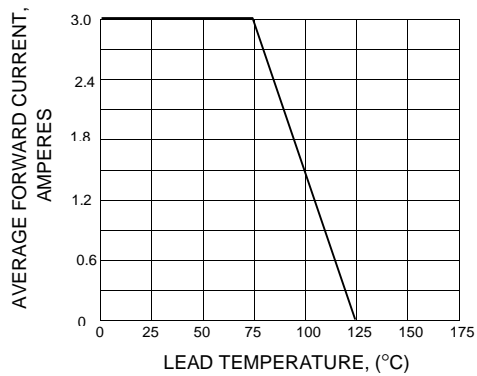


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

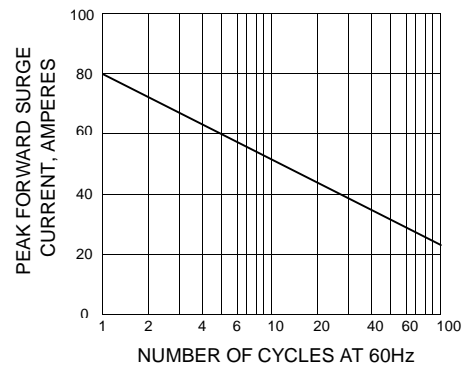


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

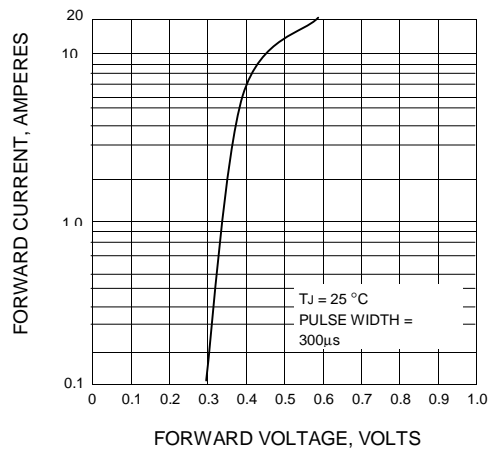


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

