



PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424


**SDR9800S10
thru
SDR9800S20**

Designer's Data Sheet

FEATURES:

- Forward current to 800 Amps
- PIV to 2000 Volts
- Transient Voltage rating of 200 Volts above PIV
- Pressure contact device
- Single Chip construction
- Low forward voltage drop
- Hermetically sealed
- For High Power applications
- For reverse polarity ad suffix "R"
- Fast Recovery version available (0.7 usec typical)
- Higher Voltage versions up to 5000 volts available
- TX, TXV, and Space Level Screening available

**800 AMPS
1000-2000 VOLTS
25µsec
STANDARD RECOVERY
HIGH CURRENT RECTIFIER**

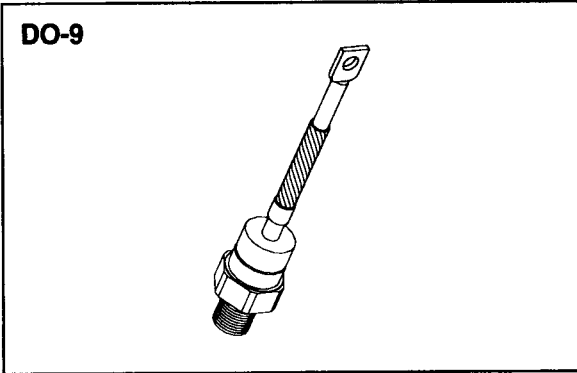

MAXIMUM RATINGS

RATING (Note 1)	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM	1000	Volts
	VRWM	1500	
	VR	2000	
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	800	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave, TA=25°C)	IFSM	6500	Amps
Operating and storage temperature	Top & Tstg	-55 to +175	°C
Maximum Thermal Resistance Junction to Case	RθJC	0.14	°C/W

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET#: RP0011 A

RMD

**SDR9800S10
thru
SDR9800S20**

PRELIMINARY




SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (IF = 800 Adc pulse, TJ=25°C)	VF	1.35	Vdc
Instantaneous Forward Voltage Drop (IF = 800 Adc pulse, TJ= +175°C)	VF	1.30	Vdc
Reverse Leakage Current (Rated VR pulse, TJ=25°C)	IR	2	mA
Reverse Leakage Current (Rated VR pulse, TJ=175°C)	IR	40	mA
Reverse Recovery Time (IFM=800 A, VR=400V, di/dt= -25μs, Rs=10Ω, Cs=0.5μF, TA=25°C)	trr	25	μsec

CASE OUTLINE: DO-9

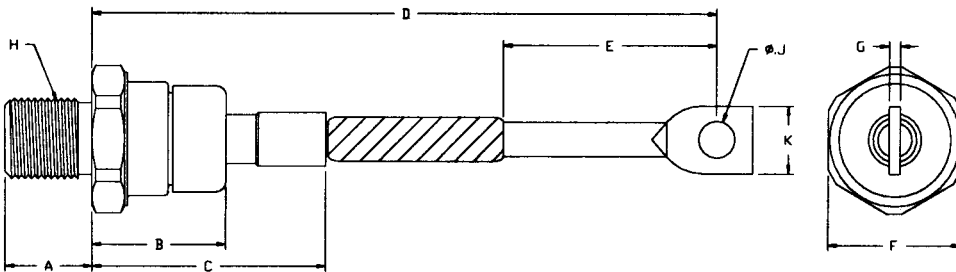

DIM	MIN	MAX
A	0.79"	0.83"
B	---	1.6"
C	---	2.25"
D	5.00"	6.00"
E	0.8"	2.2"typ
F	1.212"	1.250"
G	0.063"	0.172"
H	0.75-16UNF	
J	0.265"	0.350"
K	0.530"	0.755"

TYPICAL OPERATING CURVES

TA=25° C Unless otherwise specified

