
SUBMITTAL INFORMATION



Service Insulator Key Corporation Stops - (SI-F1000-4-AWT-Q style)

AWWA/CC TAPER THREAD INLET BY SERVICE INSULATOR BY QUICK JOINT FOR COPPER OR PLASTIC TUBING OUTLET

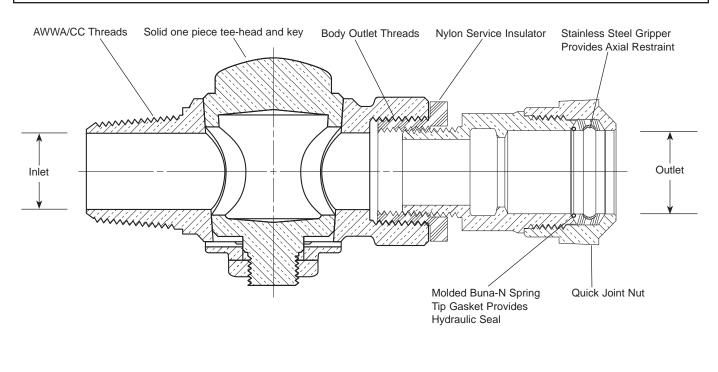

VALVE SIZE	Assembly	Assembly	Approx.	Part	✓ Submitted
	Inlet Size	Inlet Size	Wt. Lbs.	Number	Item(s)
1"	1"	1"	2.9	SI-F1000-4-AWT-Q	



- All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- · Body design provides larger, more rugged wrench flats for proper installation
- Meets 100 PSI working pressure requirement of AWWA Standard C800
- Nylon service insulator provides protection against service line electrolysis

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.

		The Ford Meter Box Company, I P.O. Box 443, Wabash, Indiana U.S.A. 46992 Phone: 260-563-3171 / Fax: 800-826-3487 Overseas Fax: 260-563-0167 http://www.fordmeterbox.com	nc. -0443 12/17/12	Submitted By:
--	--	---	---------------------------------	---------------