



N-Channel 20-V (D-S) MOSFETs

PRODUCT SUMMARY

	V_{DS} (V)	$R_{DS(on)}$ (Ω)	I_D (A)	Q_g (Typ.)
Channel-1	20	0.0086 at $V_{GS} = 10$ V	16 ^a	9.5 nC
		0.0108 at $V_{GS} = 4.5$ V	16 ^a	
Channel-2	20	0.0058 at $V_{GS} = 10$ V	16 ^a	27 nC
		0.0066 at $V_{GS} = 4.5$ V	16 ^a	

FEATURES

- Halogen-free According to IEC 61249-2-21 Definition
- TrenchFET® Power MOSFETs
- 100 % R_g Tested
- Compliant to RoHS Directive 2002/95/EC

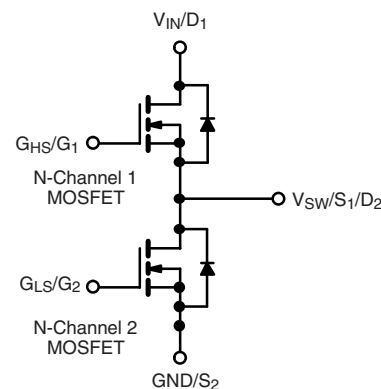
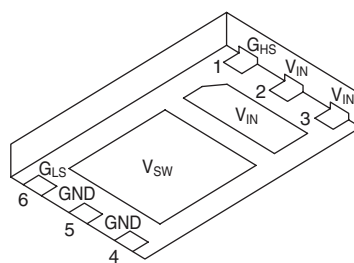
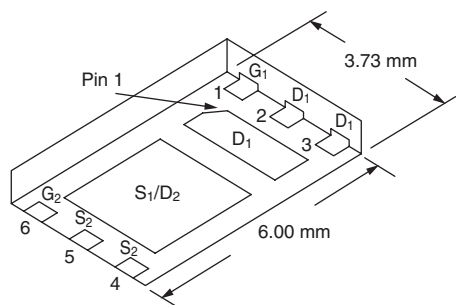
APPLICATIONS

- Notebook System Power



RoHS
COMPLIANT
HALOGEN
FREE

PowerPAIR™ 6 x 3.7



Ordering Information: SiZ700DT-T1-GE3 (Lead (Pb)-free and Halogen-free)

ABSOLUTE MAXIMUM RATINGS $T_A = 25^\circ\text{C}$, unless otherwise noted

Parameter		Symbol	Channel-1	Channel-2	Unit
Drain-Source Voltage		V _{DS}	20	20	V
Gate-Source Voltage		V _{GS}	± 16		
Continuous Drain Current (T _J = 150 °C)	T _C = 25 °C	I _D	16 ^a	16 ^a	A
	T _C = 70 °C		16 ^a	16 ^a	
	T _A = 25 °C		13.1 ^{b, c}	17.3 ^{b, c}	
	T _A = 70 °C		10.5 ^{b, c}	13.9 ^{b, c}	
Pulsed Drain Current		I _{DM}	60	60	
Source Drain Current Diode Current	T _C = 25 °C	I _S	14.7	16 ^a	
	T _A = 25 °C		1.96 ^{b, c}	2.3 ^{b, c}	
Maximum Power Dissipation	T _C = 25 °C	P _D	2.36	2.8	W
	T _C = 70 °C		1.5	1.78	
	T _A = 25 °C		1.4 ^{b, c}	1.47 ^{b, c}	
	T _A = 70 °C		0.9 ^{b, c}	0.94 ^{b, c}	
Operating Junction and Storage Temperature Range		T _J , T _{stg}	- 55 to 150		°C
Soldering Recommendations (Peak Temperature) ^{d, e}			260		

THERMAL RESISTANCE RATINGS

Parameter		Symbol	Channel-1		Channel-2		Unit
			Typ.	Max.	Typ.	Max.	
Maximum Junction-to-Ambient ^{b, f}	t ≤ 10 s	R _{thJA}	39	53	33	45	°C/W
Maximum Junction-to-Case (Drain)	Steady State	R _{thJC}	5.7	7.1	3.7	4.6	

Notes:

a. Package limited.

b. Surface Mounted on 1" x 1" FR4 board.

c. $t = 10$ s.

d. See Solder Profile (www.vishay.com/ppg?73257). The PowerPAIR is a leadless package. The end of the lead terminal is exposed copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper tip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection.

e. Rework Conditions: manual soldering with a soldering iron is not recommended for leadless components.

f. Maximum under Steady State conditions is 90°C/W for Channel-1 and 85°C/W for Channel-2.

SiZ700DT

Vishay Siliconix



SPECIFICATIONS T _J = 25 °C, unless otherwise noted								
Parameter	Symbol	Test Conditions		Min.	Typ.	Max.	Unit	
Static								
Drain-Source Breakdown Voltage	V _{DS}	V _{GS} = 0 V, I _D = 250 μA	Ch-1	20			V	
		V _{GS} = 0 V, I _D = 250 μA	Ch-2	20				
V _{DS} Temperature Coefficient	ΔV _{DS} /T _J	I _D = 250 μA	Ch-1		21		mV/°C	
		I _D = 250 μA	Ch-2		21			
V _{GS(th)} Temperature Coefficient	ΔV _{GS(th)} /T _J	I _D = 250 μA	Ch-1		- 5.8			
		I _D = 250 μA	Ch-2		- 5.8			
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	Ch-1	0.8		2.2	V	
		V _{DS} = V _{GS} , I _D = 250 μA	Ch-2	0.8		2.2		
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ± 16 V	Ch-1			± 100	nA	
			Ch-2			± 100		
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 20 V, V _{GS} = 0 V	Ch-1			1	μA	
		V _{DS} = 20 V, V _{GS} = 0 V	Ch-2			1		
		V _{DS} = 20 V, V _{GS} = 0 V, T _J = 55 °C	Ch-1			10		
		V _{DS} = 20 V, V _{GS} = 0 V, T _J = 55 °C	Ch-2			10		
On-State Drain Current ^b	I _{D(on)}	V _{DS} ≥ 5 V, V _{GS} = 10 V	Ch-1	30			A	
		V _{DS} ≥ 5 V, V _{GS} = 10 V	Ch-2	30				
Drain-Source On-State Resistance ^b	R _{DS(on)}	V _{GS} = 10 V, I _D = 15 A	Ch-1		0.007	0.0086	Ω	
		V _{GS} = 10 V, I _D = 20 A	Ch-2		0.0047	0.0058		
		V _{GS} = 4.5 V, I _D = 10 A	Ch-1		0.0088	0.0108		
		V _{GS} = 4.5 V, I _D = 15 A	Ch-2		0.0054	0.0066		
Forward Transconductance ^b	g _{fs}	V _{DS} = 10 V, I _D = 15 A	Ch-1		60		S	
		V _{DS} = 10 V, I _D = 20 A	Ch-2		100			
Dynamic ^a								
Input Capacitance	C _{iss}	Channel-1 V _{DS} = 10 V, V _{GS} = 0 V, f = 1 MHz	Ch-1		1300		pF	
			Ch-2		3860			
Output Capacitance	C _{oss}		Ch-1		290			
			Ch-2		760			
Reverse Transfer Capacitance	C _{rss}	Channel-2 V _{DS} = 10 V, V _{GS} = 0 V, f = 1 MHz	Ch-1		132			
			Ch-2		350			
Total Gate Charge	Q _g	V _{DS} = 10 V, V _{GS} = 10 V, I _D = 15 A	Ch-1		20	35	nC	
		V _{DS} = 10 V, V _{GS} = 10 V, I _D = 20 A	Ch-2		55	85		
		Channel-1 V _{DS} = 10 V, V _{GS} = 4.5 V, I _D = 15 A	Ch-1		9.5	15		
			Ch-2		27	45		
Gate-Source Charge	Q _{gs}	Channel-2 V _{DS} = 10 V, V _{GS} = 4.5 V, I _D = 20 A	Ch-1		3.2			
			Ch-2		9.2			
Gate-Drain Charge	Q _{gd}		Ch-1		2.4			
			Ch-2		7.1			
Gate Resistance	R _g	f = 1 MHz	Ch-1	0.3	1.3	2.6	Ω	
			Ch-2	0.2	1.0	2.0		

Notes:

a. Guaranteed by design, not subject to production testing.

b. Pulse test; pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$.



SPECIFICATIONS $T_J = 25\text{ }^{\circ}\text{C}$, unless otherwise noted							
Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit	
Dynamic ^a							
Turn-On Delay Time	$t_{d(on)}$	Channel-1 $V_{DD} = 10\text{ V}$, $R_L = 10\text{ }\Omega$ $I_D \cong 1.0\text{ A}$, $V_{GEN} = 4.5\text{ V}$, $R_g = 1\text{ }\Omega$	Ch-1		9	15	ns
			Ch-2		13	20	
Rise Time	t_r		Ch-1		8	15	
			Ch-2		8	15	
Turn-Off Delay Time	$t_{d(off)}$	Ch-1		25	40		
		Ch-2		52	80		
Fall Time	t_f	Ch-1		8	15		
		Ch-2		15	25		
Turn-On Delay Time	$t_{d(on)}$	Channel-1 $V_{DD} = 10\text{ V}$, $R_L = 10\text{ }\Omega$ $I_D \cong 1.0\text{ A}$, $V_{GEN} = 10\text{ V}$, $R_g = 1\text{ }\Omega$	Ch-1		8	15	
			Ch-2		12	20	
Rise Time	t_r		Ch-1		9	15	
			Ch-2		8	15	
Turn-Off Delay Time	$t_{d(off)}$	Ch-1		25	40		
		Ch-2		47	75		
Fall Time	t_f	Ch-1		8	15		
		Ch-2		10	15		
Drain-Source Body Diode Characteristics							
Continuous Source-Drain Diode Current	I_S	$T_C = 25\text{ }^{\circ}\text{C}$	Ch-1			14.7	A
			Ch-2			16	
Pulse Diode Forward Current ^a	I_{SM}		Ch-1			60	
			Ch-2			60	
Body Diode Voltage	V_{SD}	$I_S = 2.0\text{ A}$, $V_{GS} = 0\text{ V}$	Ch-1		0.8	1.2	V
		$I_S = 2.3\text{ A}$, $V_{GS} = 0\text{ V}$	Ch-2		0.8	1.2	
Body Diode Reverse Recovery Time	t_{rr}	Channel-1 $I_F = 2.0\text{ A}$, $dl/dt = 100\text{ A}/\mu\text{s}$, $T_J = 25\text{ }^{\circ}\text{C}$ Channel-2 $I_F = 2.3\text{ A}$, $dl/dt = 100\text{ A}/\mu\text{s}$, $T_J = 25\text{ }^{\circ}\text{C}$	Ch-1		25	50	ns
			Ch-2		40	80	
Body Diode Reverse Recovery Charge	Q_{rr}		Ch-1		13	25	nC
			Ch-2		31	60	
Reverse Recovery Fall Time	t_a		Ch-1		12		ns
			Ch-2		21		
Reverse Recovery Rise Time	t_b		Ch-1		13		
			Ch-2		19		

Notes:

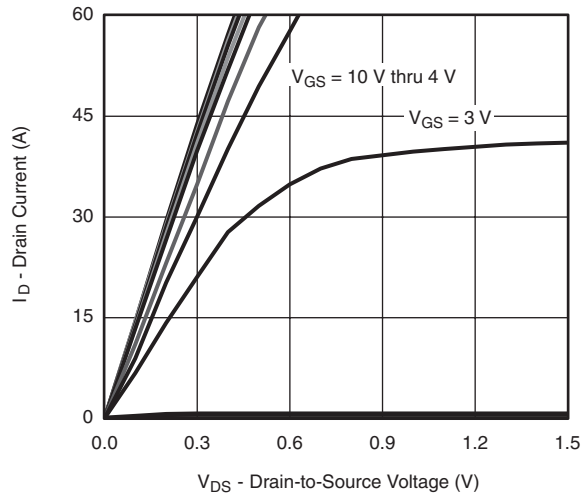
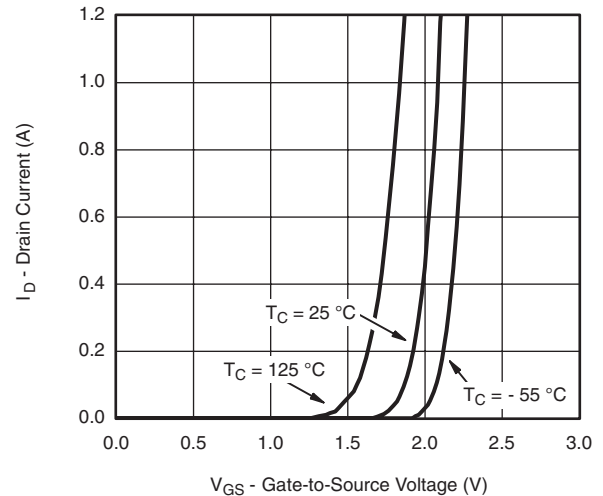
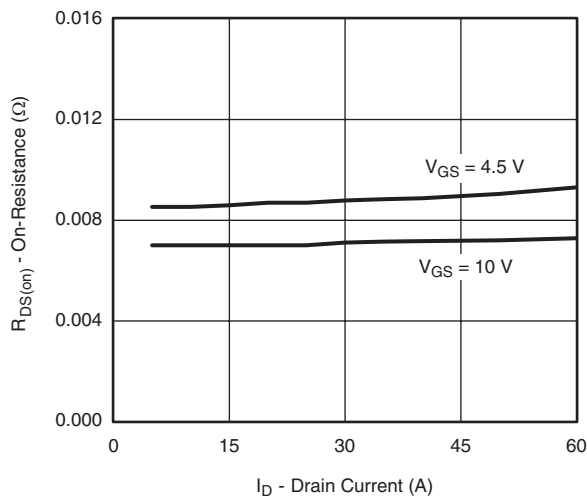
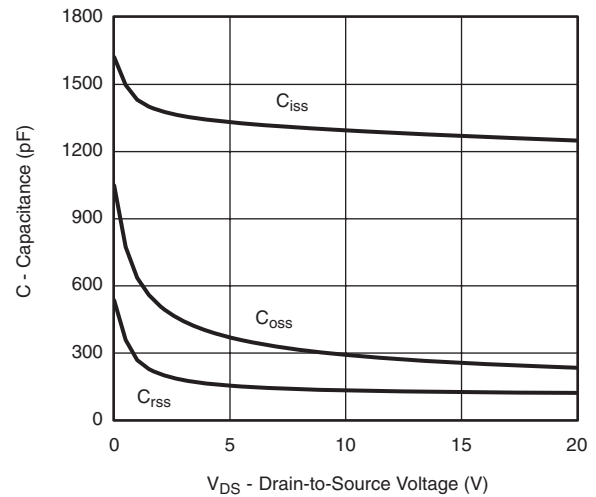
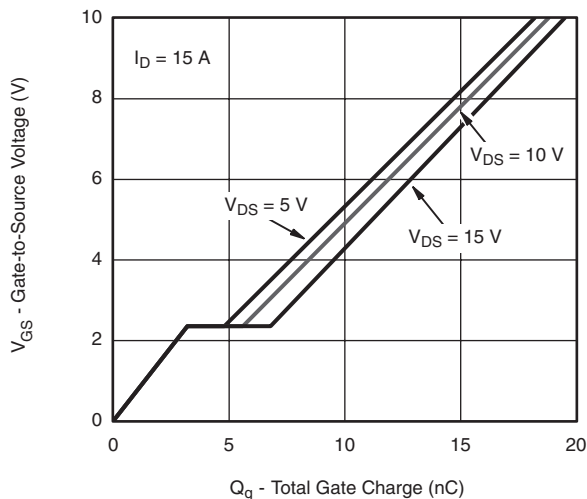
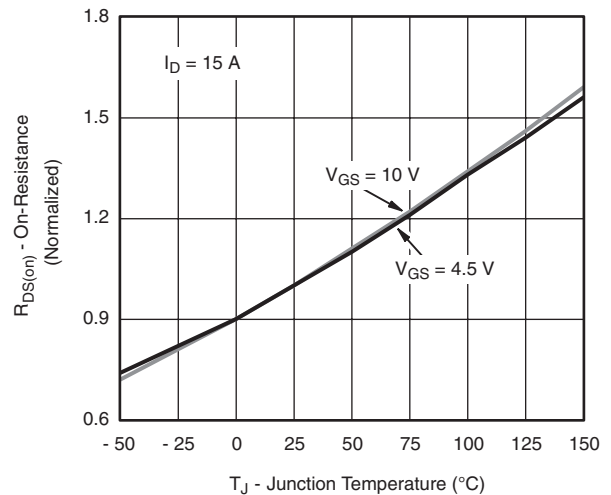
a. Guaranteed by design, not subject to production testing.

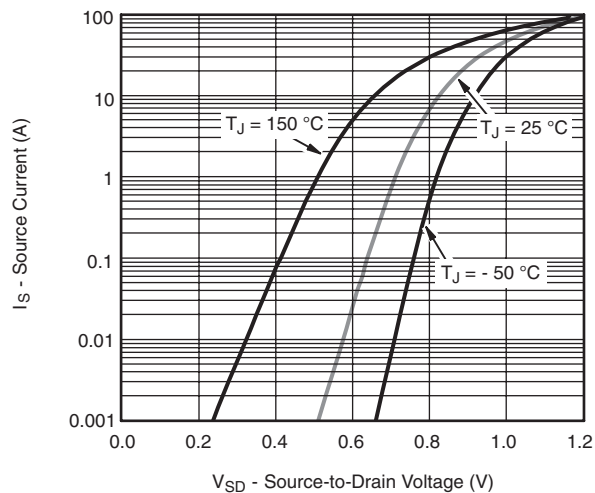
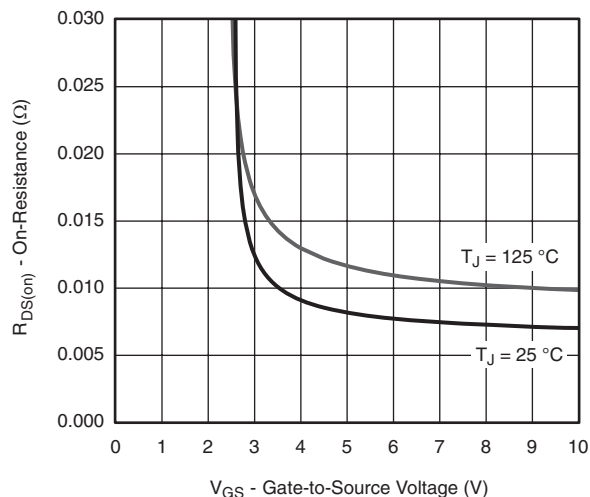
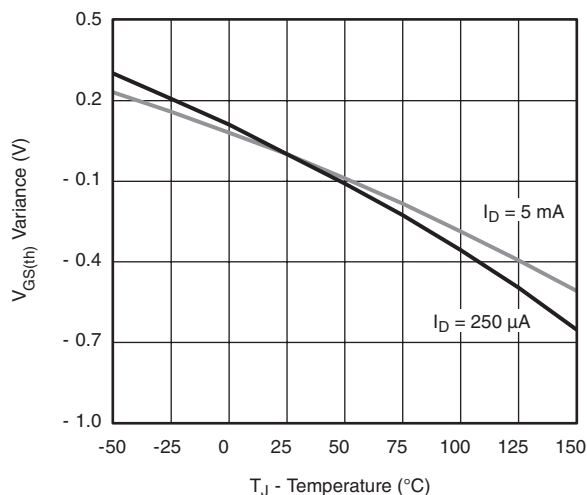
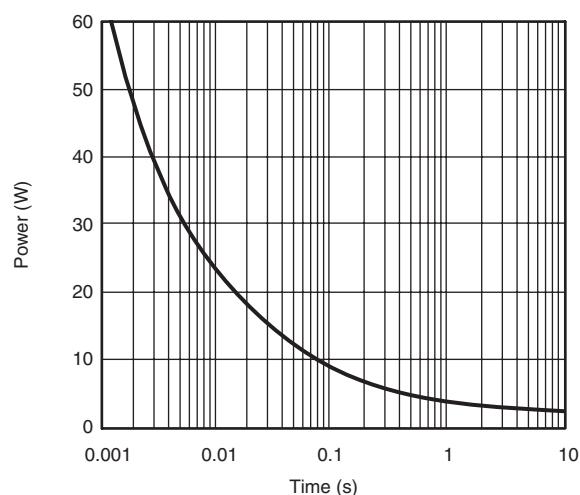
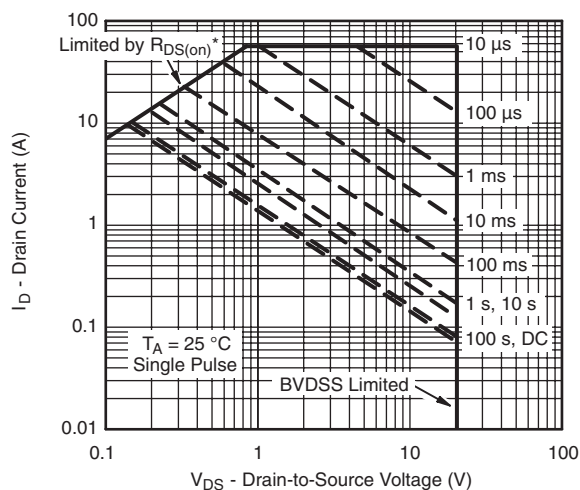
b. Pulse test; pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

SiZ700DT

Vishay Siliconix

**CHANNEL-1 TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted**Output Characteristics****Transfer Characteristics****On-Resistance vs. Drain Current****Capacitance****Gate Charge****On-Resistance vs. Junction Temperature**

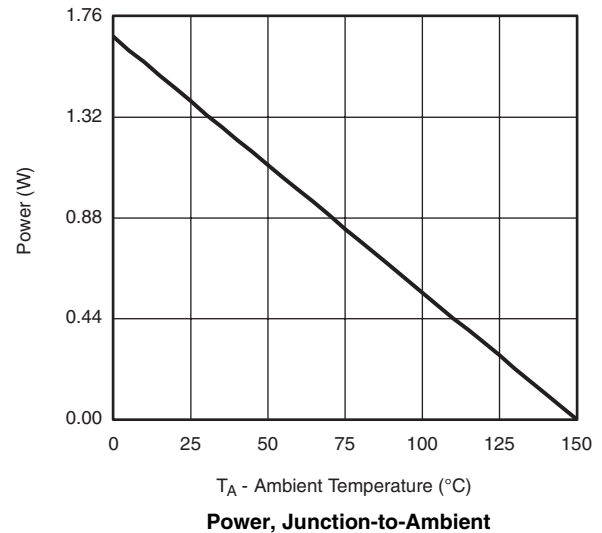
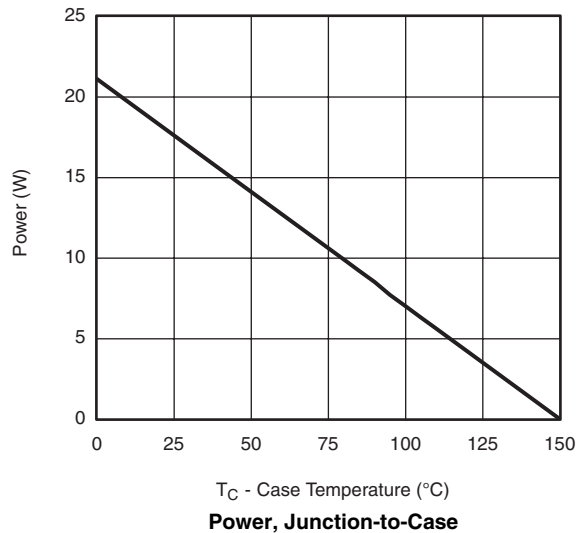
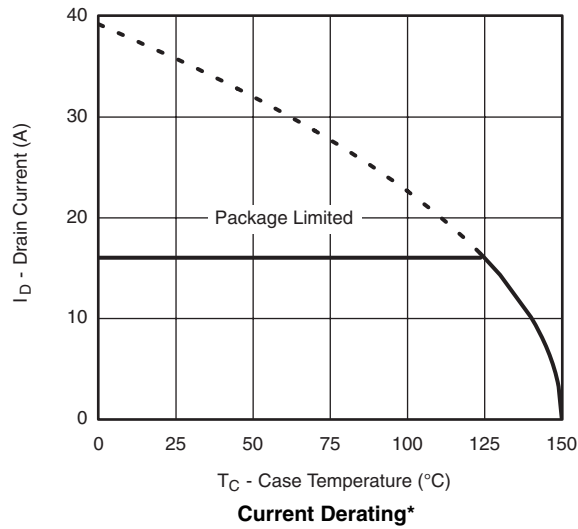

CHANNEL-1 TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

Source-Drain Diode Forward Voltage

On-Resistance vs. Gate-to-Source Voltage

Threshold Voltage

Single Pulse Power


* $V_{GS} >$ minimum V_{GS} at which $R_{DS(on)}$ is specified

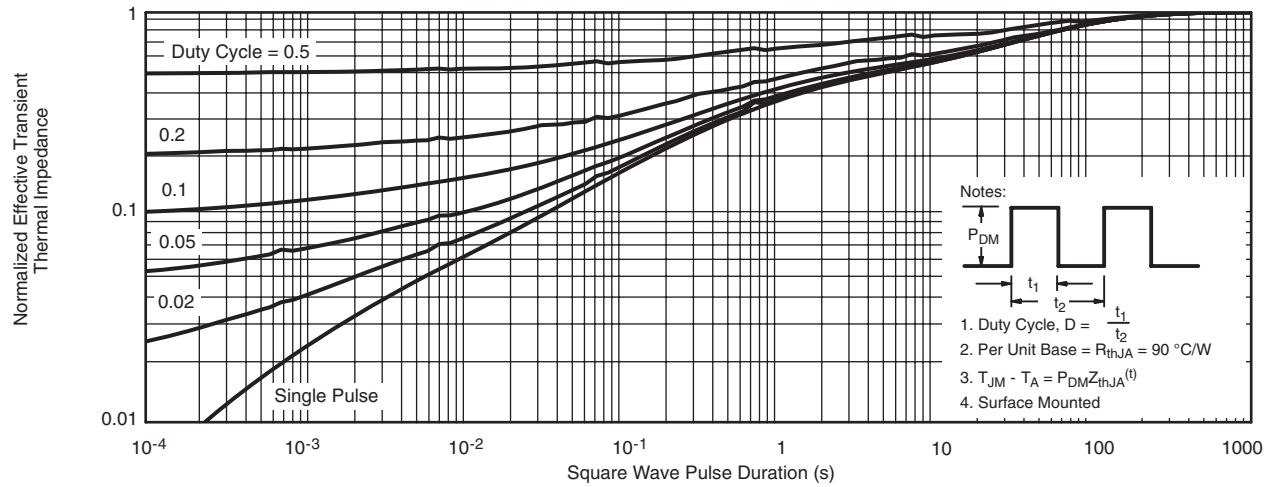
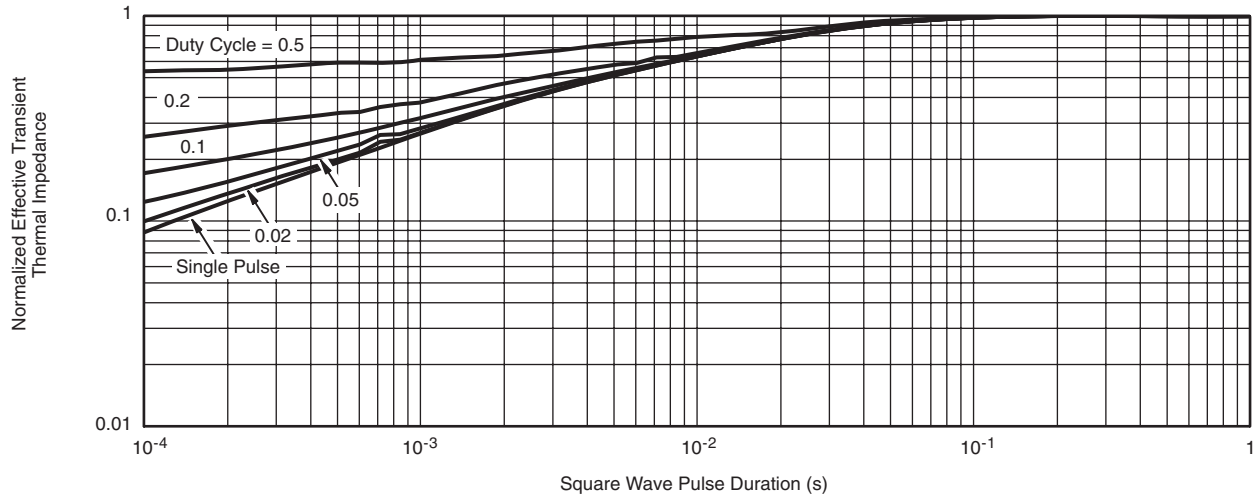
Safe Operating Area, Junction-to-Ambient

SiZ700DT

Vishay Siliconix

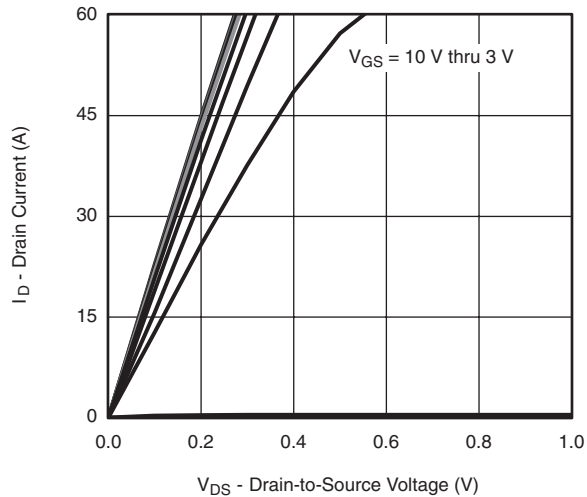
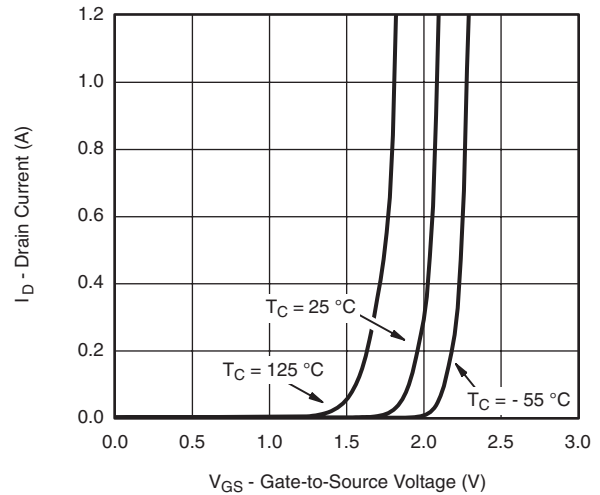
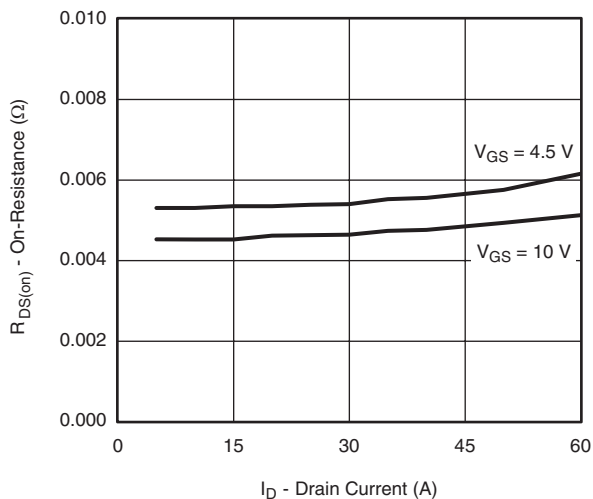
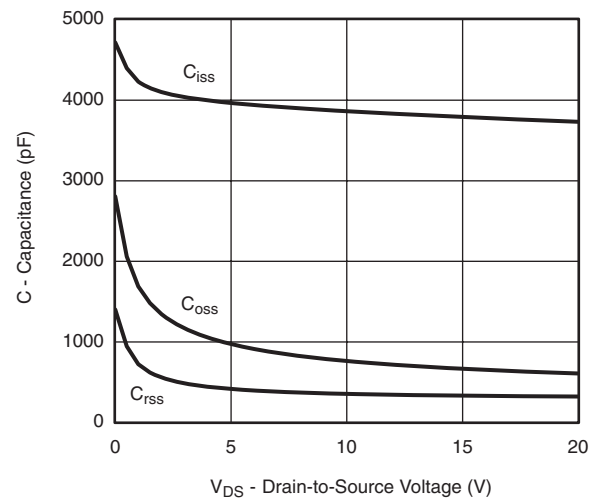
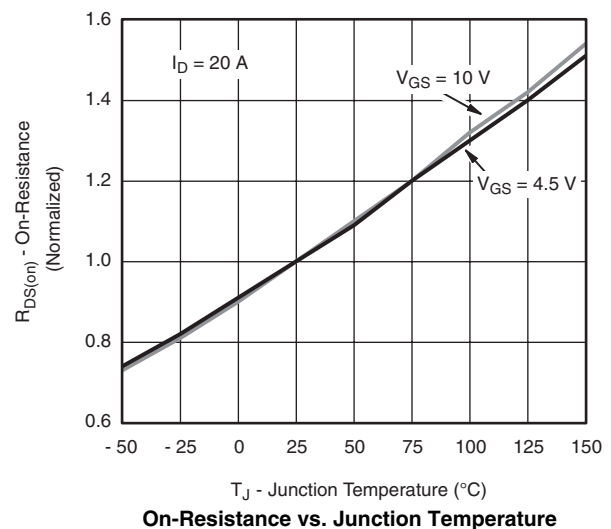
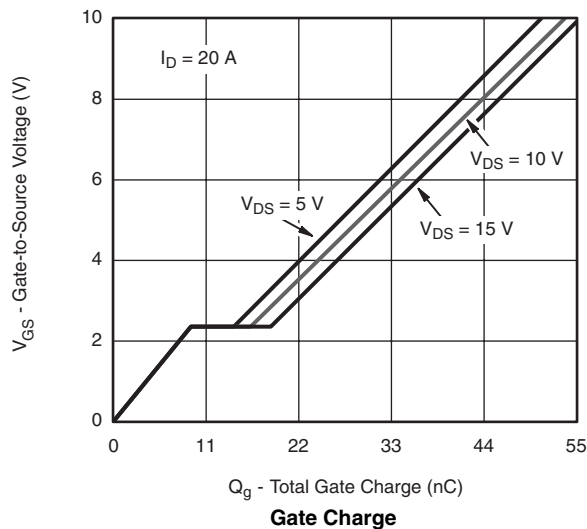
**CHANNEL-1 TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted

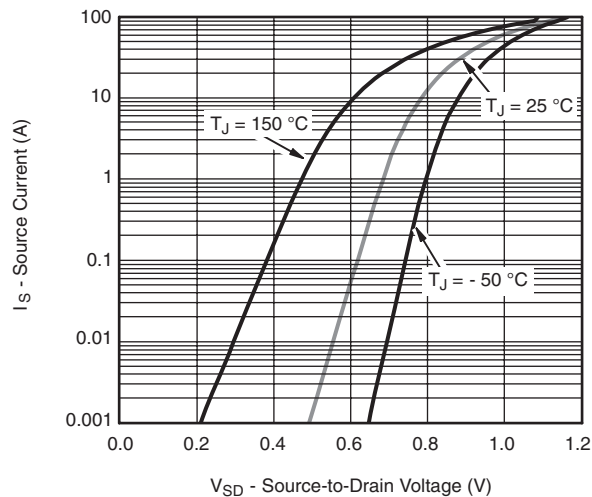
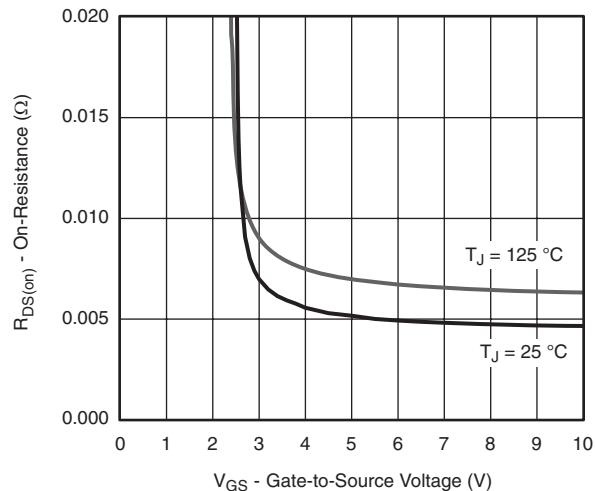
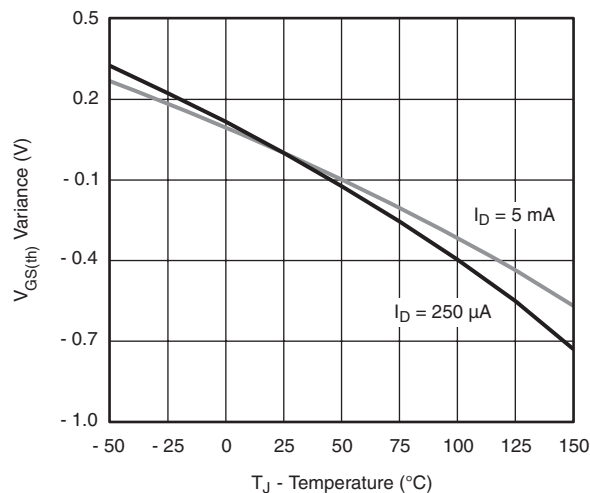
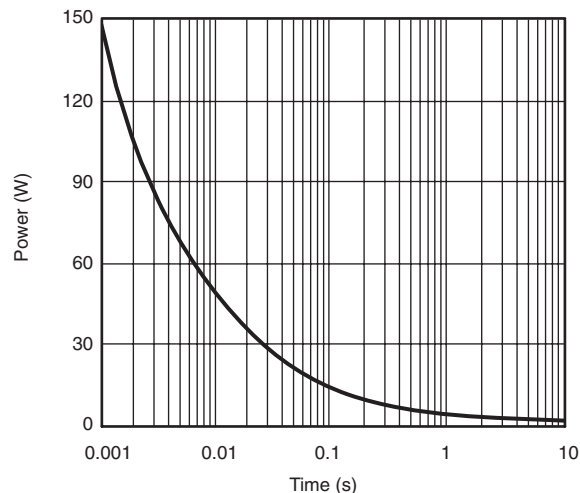
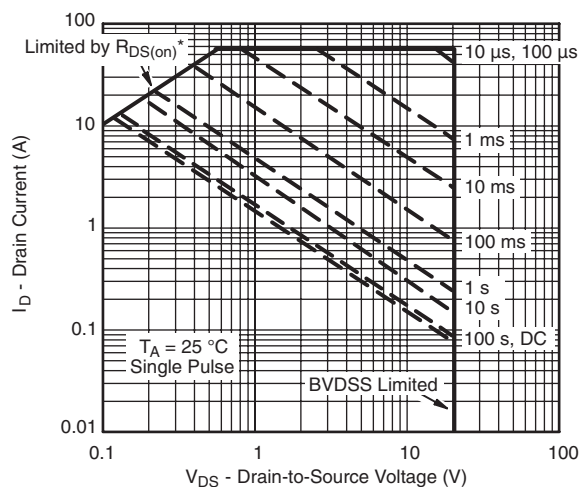
* The power dissipation P_D is based on $T_{J(max)} = 150$ °C, using junction-to-case thermal resistance, and is more useful in settling the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit.


CHANNEL-1 TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

Normalized Thermal Transient Impedance, Junction-to-Ambient

Normalized Thermal Transient Impedance, Junction-to-Case

Si700DT

Vishay Siliconix

**CHANNEL-2 TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted**Output Characteristics****Transfer Characteristics****On-Resistance vs. Drain Current****Capacitance**

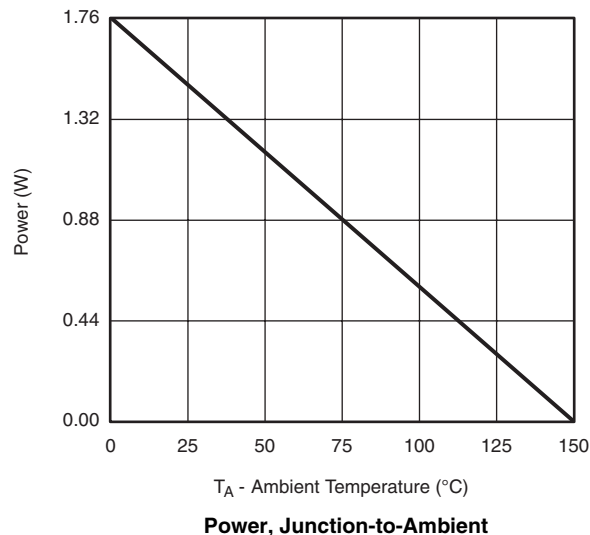
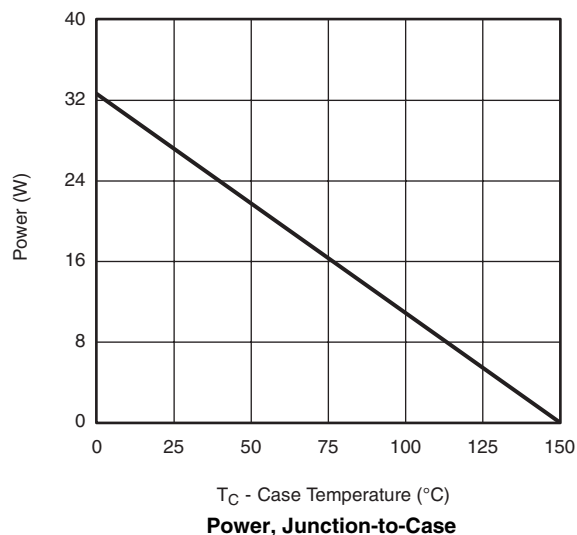
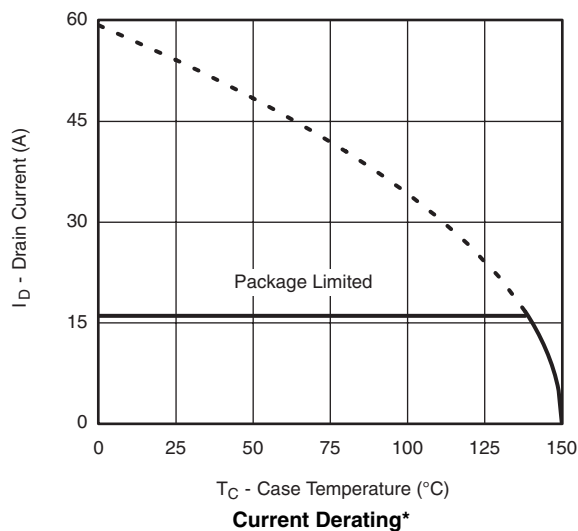

CHANNEL-2 TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

Source-Drain Diode Forward Voltage

On-Resistance vs. Gate-to-Source

Threshold Voltage

Single Pulse Power


* $V_{GS} >$ minimum V_{GS} at which $R_{DS(on)}$ is specified

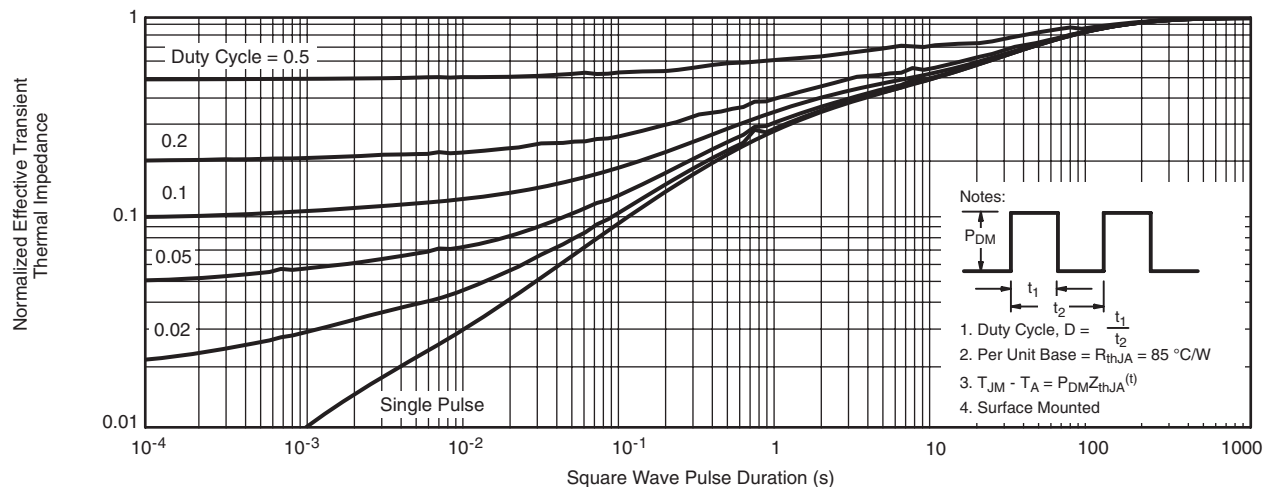
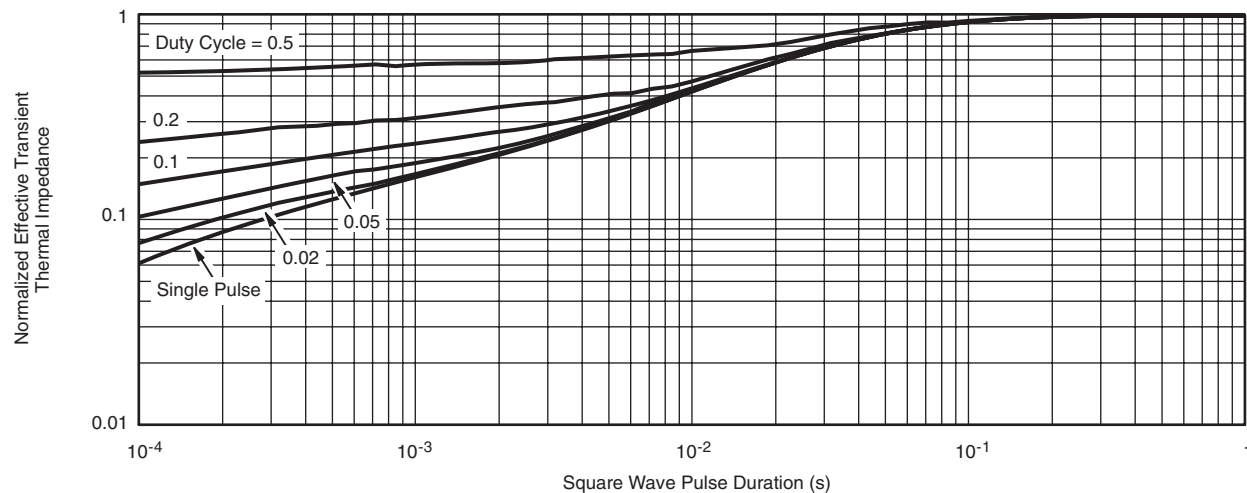
Safe Operating Area, Junction-to-Ambient

SiZ700DT

Vishay Siliconix

**CHANNEL-2 TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted

* The power dissipation P_D is based on $T_{J(max)} = 150$ °C, using junction-to-case thermal resistance, and is more useful in settling the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit.


CHANNEL-2 TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

Normalized Thermal Transient Impedance, Junction-to-Ambient

Normalized Thermal Transient Impedance, Junction-to-Case

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppg269090.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.