

# SJ-A1440 Series



**Size, mm**

9 x 14

**I/O**

4 J Lead

**Supply Voltage**

3.3V / 5V

## LVCMOS SJ-A1440 Series *Rev P* Frequency Range: 10.0 MHz to 250.0 MHz

**Description**

The **SJ-A1440 Series** of quartz crystal oscillators provide enable/disable 3-state LVCMOS compatible signals for bus connected systems. Supplying Pin 1 of the SJ-A1440 units with a logic "1" or open enables its Pin 3 output. In the disable mode, Pin 3 presents a high impedance to the load.

**Features**

- High Reliability - NEL HALT/HASS qualified for crystal oscillator start-up conditions
- Low jitter - Wavcrest jitter characterization available
- Wide frequency range—10.0 MHz to 250.0 MHz
- User specified tolerance available
- Will withstand vapor phase temperatures of 253°C for 4 minutes maximum
- Space-saving alternative to discrete component oscillators
- High shock resistance, to 3000g
- Metal lid electrically connected to ground to reduce EMI
- 3.3 Volt operation
- High Q crystal actively tuned oscillator circuit
- Power supply decoupling internal
- No internal PLL avoids cascading PLL problems
- Low power consumption
- Gold plated leads
- RoHS Compliant, Lead Free Construction

**Creating a Part Number**

**SJ - A144X - FREQ**

**Package Code**

SJ 4 J Lead 9x14 mm SMD


**Input Voltage**

Code	Specification
A	3.3 V
B	5 V

**Tolerance/Performance**

0	±100 ppm 0-70°C
1	±50 ppm 0-70°C
7	±25 ppm 0-70°C
9	Customer Specific
A	±20 ppm 0-70°C
B	±50 ppm -40 to +85°C
C	±100 ppm -40 to +85°C

**Drawing Specifications**

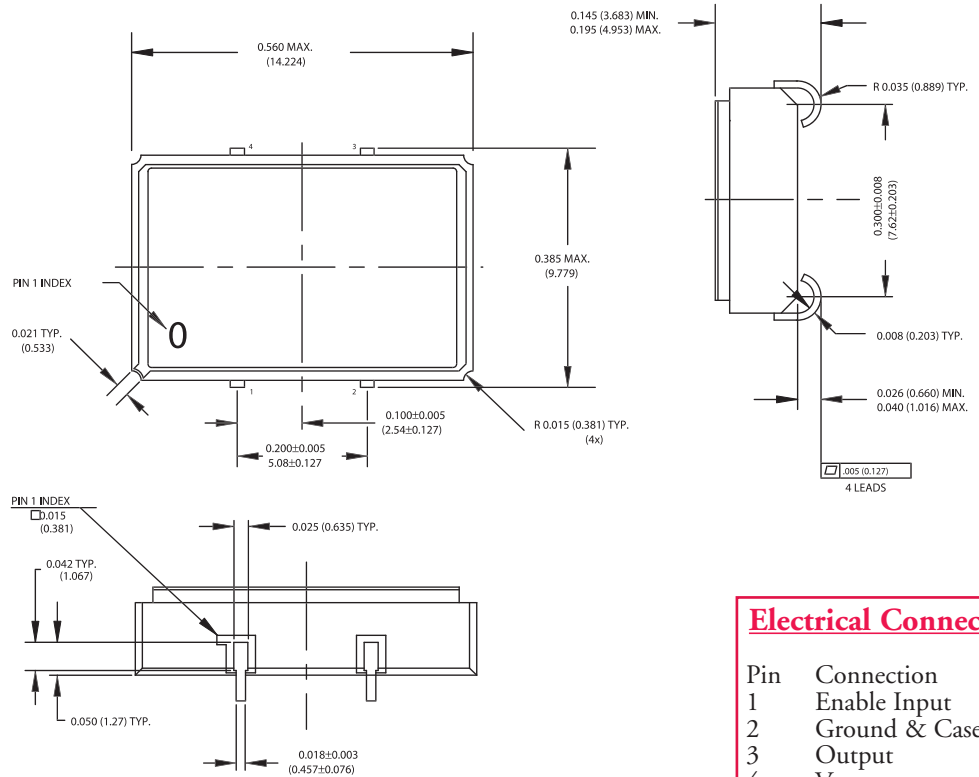

Dimensions shown in inches and millimeters.

**Electrical Connection**

Pin	Connection
1	Enable Input
2	Ground & Case
3	Output
4	V <sub>DD</sub>



For the most up to date specifications on each NEL product, log on to our website—[www.nelfc.com](http://www.nelfc.com)

# LVCMOS

## SJ-A1440 Series Rev P

Frequency Range: 10.0 MHz to 250.0 MHz

### Operating Conditions and Output Characteristics

#### Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Frequency	—	—	10.0 MHz	—	250.0 MHz
Duty Cycle	—	@V <sub>DD</sub> /2	45/55%	—	55/45%
Logic 0	V <sub>OL</sub>	@600 $\mu$ A	—	—	0.2 V
Logic 1	V <sub>OH</sub>	@600 $\mu$ A	V <sub>DD</sub> -0.2 V	—	—
Rise & Fall Time	t <sub>r</sub> , t <sub>f</sub>	10-90%	—	—	2 ns
T <sub>pz</sub>	—	—	—	—	100 ns
Jitter, RMS <sup>(2)</sup>	—	—	—	—	3 psec
Enable Voltage	—	—	2.0V	—	—
Disable Voltage	—	—	—	—	0.8V
Frequency Stability <sup>(1)</sup>	dF/F	Overall conditions including: voltage, calibration, temp., 10 yr aging, shock, vibration	-100 ppm	—	+100 ppm

#### General Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Supply Voltage <sup>(3)</sup>	V <sub>DD</sub>	—	2.97 V	3.3 V	3.63 V
Supply Current	I <sub>DD</sub>	No Load	0.0 mA	40 mA	60 mA
Output Current	I <sub>O</sub>	—	0.0 mA	—	$\pm$ 25.0 mA
Operating Temperature	T <sub>A</sub>	—	0°C	—	70°C
Storage Temperature	T <sub>S</sub>	—	-55°C	—	125°C
Power Dissipation	P <sub>D</sub>	—	—	—	218 mW
Lead Temperature	T <sub>L</sub>	Soldering, 10 sec.	—	—	300°C
Load	—	—	—	—	15 pf
Start-up Time	t <sub>s</sub>	—	—	2 ms	10 ms

#### Environmental and Mechanical Characteristics

Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-833, Method 1011, Condition A
Vibration	0.060" double amplitude 10 Hz to 55 Hz, 35g's 55 Hz to 2000 Hz
Soldering Condition	300°C for 10 seconds
Hermetic Seal	Leak rate less than 1 x 10 <sup>-8</sup> atm.cc/sec of helium

#### Footnotes:

- 1) Standard frequency stability ( $\pm$ 20,  $\pm$ 25,  $\pm$ 50 ppm & others available).
- 2) Jitter performance is frequency dependent. Please contact factory for full Wavecrest characterization.  
RMS jitter bandwidth of 12kHz to 20MHz.
- 3) Internal high frequency power source decoupling.

#### Test Load

