



Description

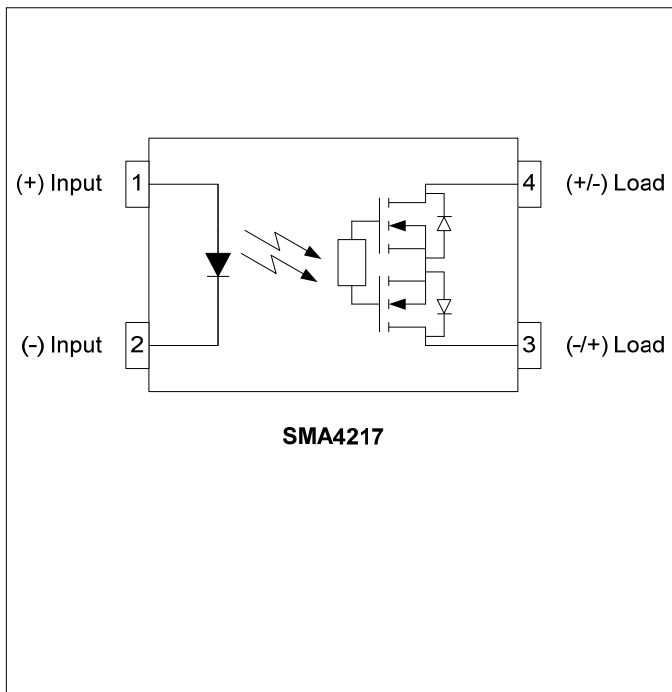
The SMA4217 is a bi-directional, single-pole, single-throw, normally open multipurpose solid-state relay in a miniature 4-pin small outline package. It is designed to be a cost-effective replacement of reed relays in low voltage applications. The relay consists of an AlGaAs LED, optically coupled to a high performance Photo Diode Array (PDA), which in turn drives two low on-resistance, rugged source-to-source enhancement type DMOS transistors. The output MOS transistors are protected with free-wheeling diodes that can handle up to 1.5A of inrush current.

The SMA4217 comes standard in a 4 pin SOP package.

Applications

- Reed Relay Replacement
- Security Systems
- Meter Reading Equipment
- Data Acquisition
- Battery Monitoring
- Multiplexers

Schematic Diagram



Features

- High Input-to-Output Isolation (1500V MIN)
- Low Input Control Current (5mA MAX)
- 200mA Maximum Continuous Load Current
- Low On Resistance (5Ω MAX)
- Ultra Miniature 4SOP Package
- Long Life / High Reliability
- RoHS / Pb-Free / REACH Compliant

Agency Approvals

UL/C-UL: File # E201932
VDE: File # 40035191 (EN 60747-5-2)

Absolute Maximum Ratings

The values indicated are absolute stress ratings. Functional operation of the device is not implied at these or any conditions in excess of those defined in electrical characteristics section of this document. Exposure to absolute Maximum Ratings may cause permanent damage to the device and may adversely affect reliability.

Storage Temperature	-55 to +125°C
Operating Temperature	-40 to +85°C
Continuous Input Current	50mA
Transient Input Current	500mA
Reverse Input Control Voltage	5V
Input Power Dissipation	40mW
Total Power Dissipation	400mW
Solder Temperature – Wave (10sec).....	260°C
Solder Temperature – IR Reflow (10sec).....	260°C







Ordering Information

Part Number	Description
SMA4217	4 pin SOP, (100/Tube)
SMA4217-TR	4 pin SOP, Tape and Reel (2000/Reel)

NOTE: Suffixes listed above are not included in marking on device for part number identification


Electrical Characteristics, $T_A = 25^\circ\text{C}$ (unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Input Specifications						
LED Forward Voltage	V_F	-	1.4	1.8	V	$I_F = 10\text{mA}$
LED Reverse Voltage	BV_R	5	-	-	V	$I_R = 10\mu\text{A}$
Input Reverse Current	I_R	-	-	10	μA	$V_R = 5\text{V}$
Turn-On Current	I_F	-	1	5	mA	$V_O = 20\text{V}$, $I_O = 200\text{mA}$ (within 10mS)
Output Specifications						
Blocking Voltage	V_B	60	-	-	V	$I_O = 1\mu\text{A}$
Continuous Load Current	I_O	-	-	200	mA	$I_F = 5\text{mA}$
On Resistance	R_{ON}	-	2.5	5	Ω	$I_F = 5\text{mA}$, $I_O = 200\text{mA}$
Leakage Current	I_{Oleak}	-	0.01	1	μA	$I_F = 0\text{mA}$, $V_O = 60\text{V}$
Output Capacitance	C_{OUT}	-	20	-	pF	$V_O = 25\text{V}$, $f = 1.0\text{MHz}$
Offset Voltage	V_{OFFSET}	-	-	0.2	mV	$I_F = 1\text{mA}$
Coupled Specifications						
Turn-On Time	T_{ON}	-	0.3	1	mS	$I_F = 10\text{mA}$, $V_O = 20\text{V}$, $I_O = 100\text{mA}$
Turn-Off Time	T_{OFF}	-	0.05	1	mS	$I_F = 0\text{mA}$, $V_O = 20\text{V}$, $I_O = 100\text{mA}$
Coupled Capacitance	$C_{COUPLED}$	-	2	-	pF	
Contact Transient Ratio	-	2,000	7,000	0	V/ μS	dV = 50V
Isolation Specifications						
Isolation Voltage	V_{ISO}	1500	-	-	V_{RMS}	RH \leq 50%, t=1min
Input-Output Resistance	R_{I-O}	-	10^{12}	-	Ω	$V_{I-O} = 500V_{DC}$

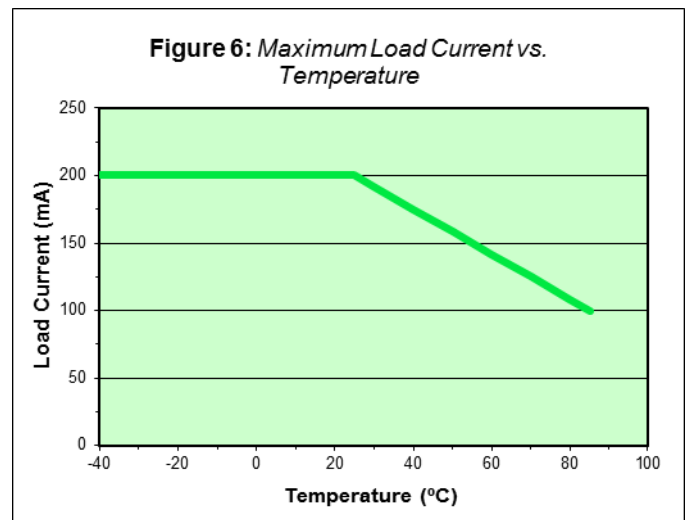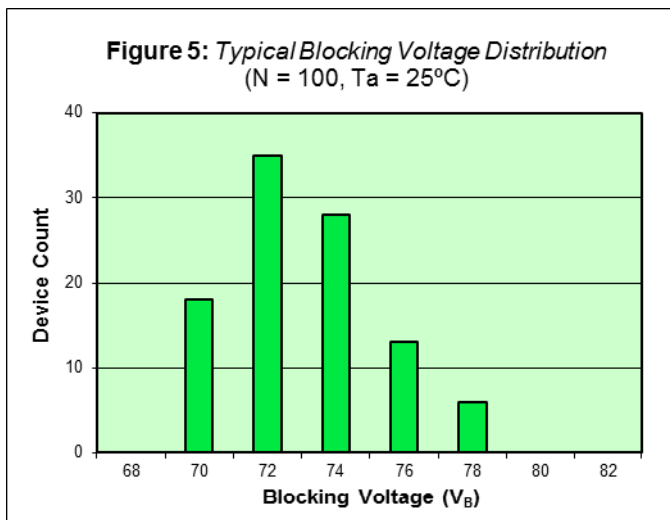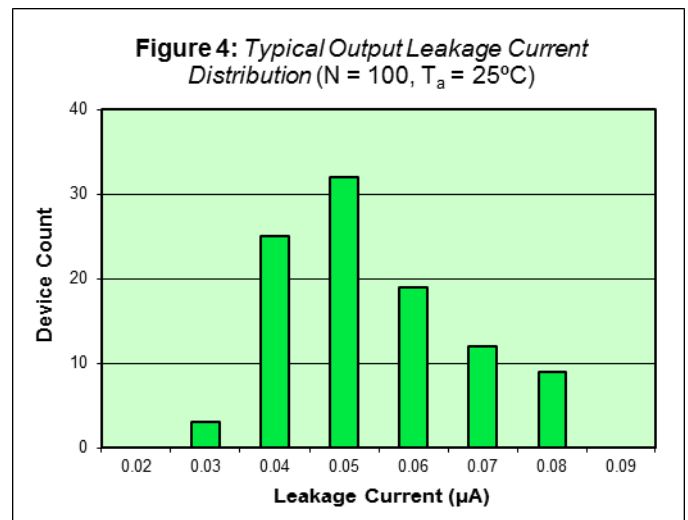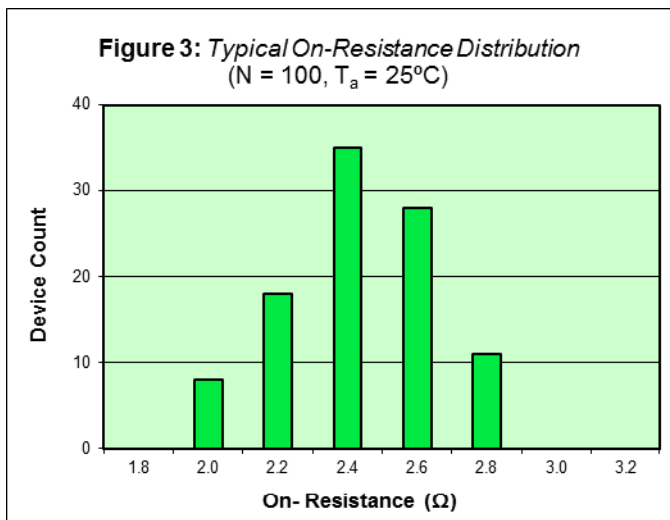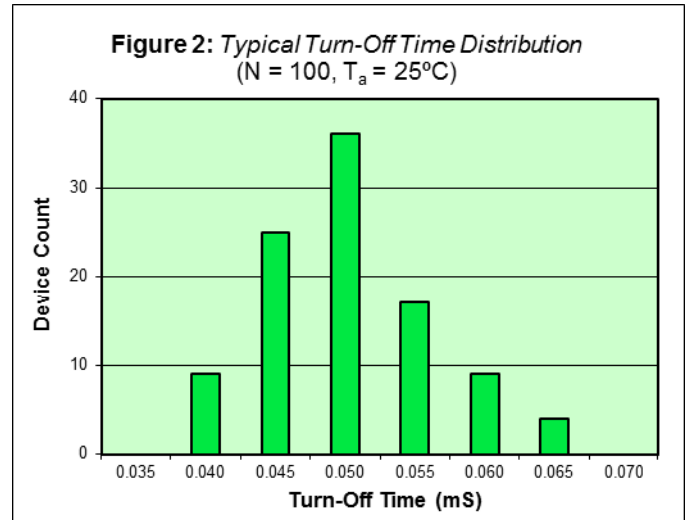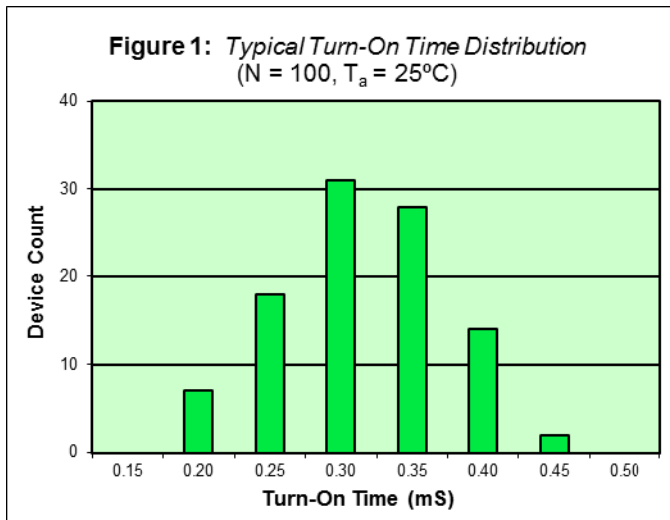SMA4217 Performance & Characteristics Plots, $T_A = 25^\circ\text{C}$ (unless otherwise specified)


SMA4217 Solder Reflow Temperature Profile Recommendations
(1) Infrared Reflow:

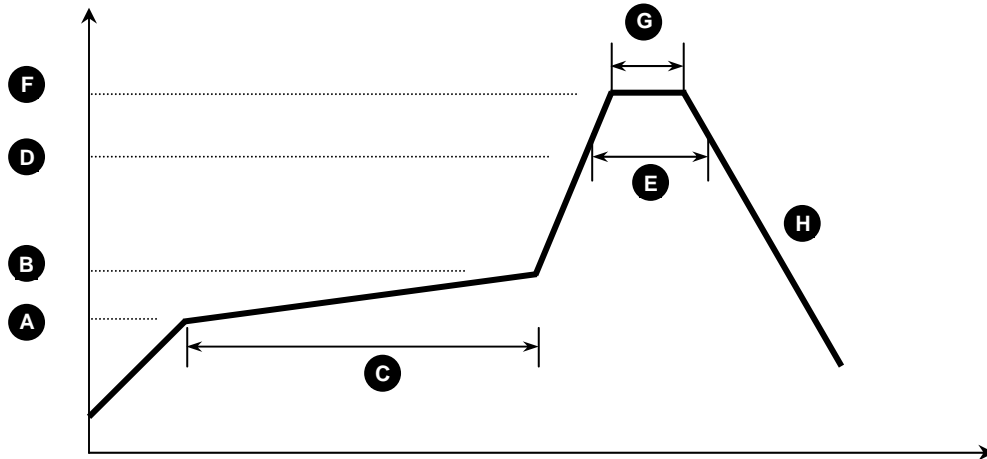Refer to the following figure as an example of an optimal temperature profile for single occurrence infrared reflow. Soldering process should not exceed temperature or time limits expressed herein. Surface temperature of device package should not exceed 250°C:



Process Step	Description	Parameter
A	Preheat Start Temperature (°C)	150°C
B	Preheat Finish Temperature (°C)	180°C
C	Preheat Time (s)	90 - 120s
D	Melting Temperature (°C)	230°C
E	Time above Melting Temperature (s)	30s
F	Peak Temperature, at Terminal (°C)	260°C
G	Dwell Time at Peak Temperature (s)	10s
H	Cool-down (°C/s)	<6°C/s

(2) Wave Solder:

Maximum Temperature: 260°C (at terminal)
 Maximum Time: 10s
 Pre-heating: 100 - 150°C (30 - 90s)
 Single Occurrence

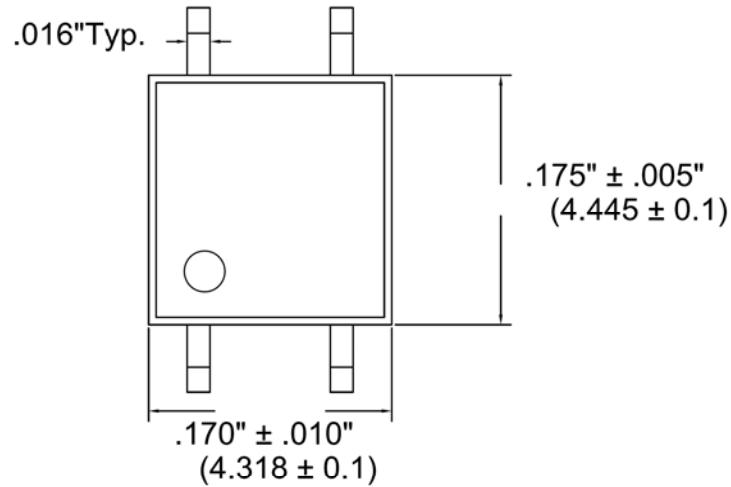
(3) Hand Solder:

Maximum Temperature: 350°C (at tip of soldering iron)
 Maximum Time: 3s
 Single Occurrence


SMA4217 Package Dimensions

4 PIN SOP Package


Note: All dimensions in inches with millimeters [mm] in parenthesis ()




TOP VIEW

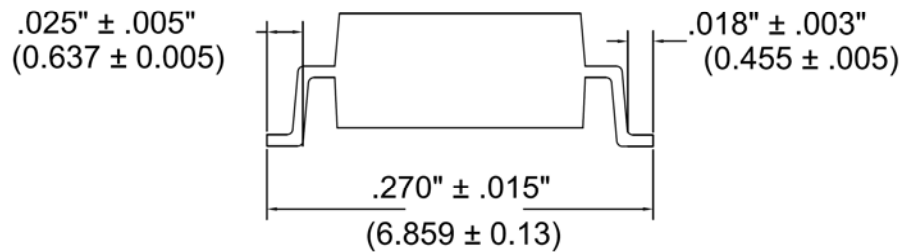

END VIEW

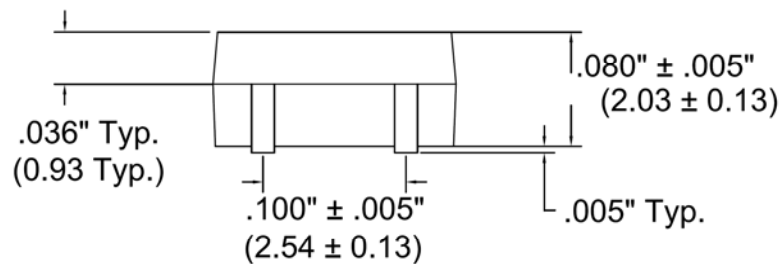

SIDE VIEW

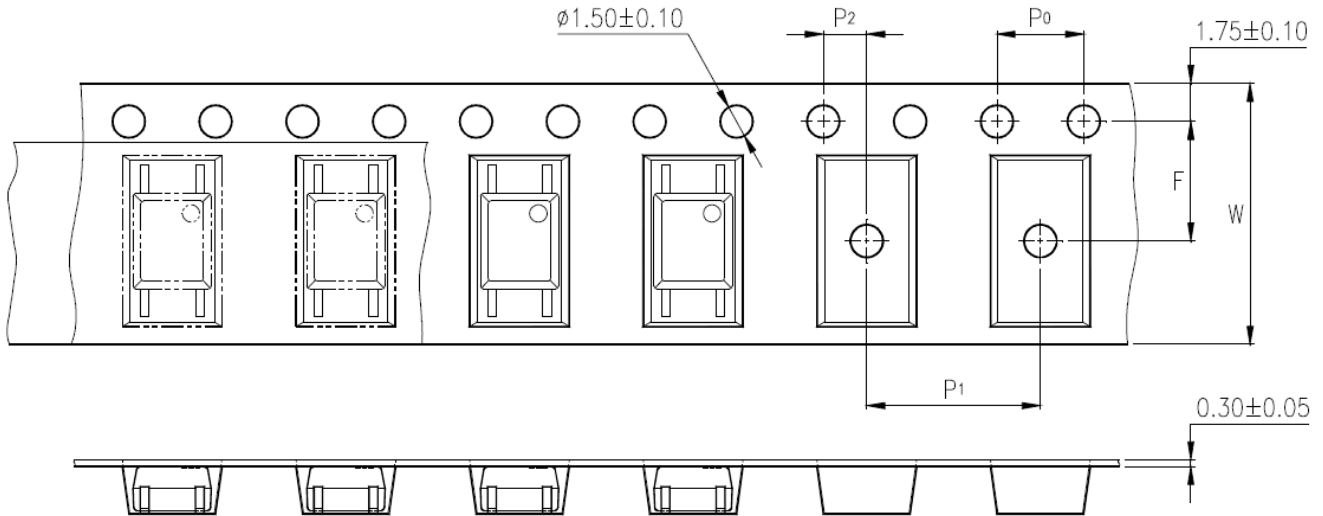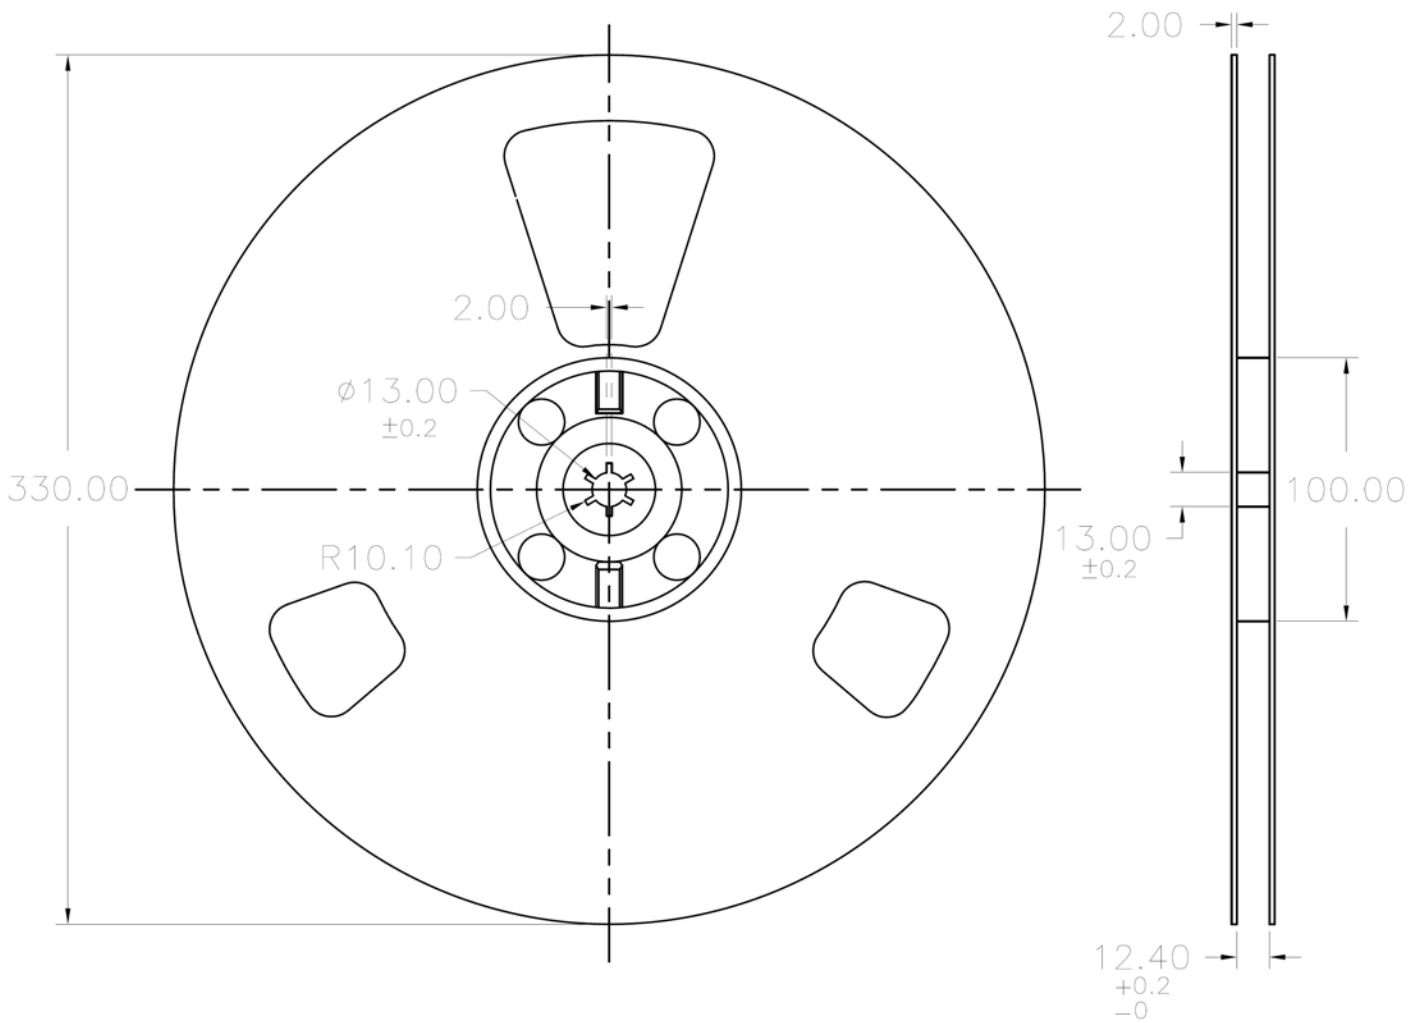
SMA4217 Packaging Specifications
Tape & Reel Specifications (T&R)
Note: All dimensions in millimeters [mm]


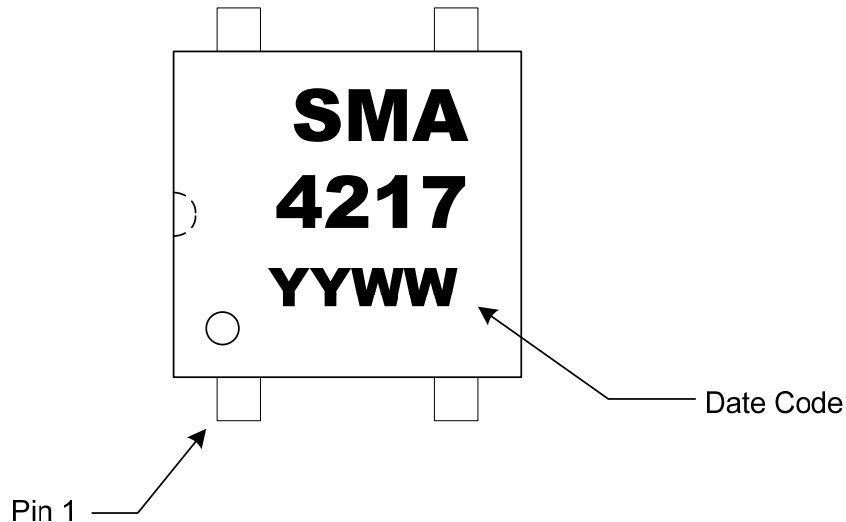
Specification	Symbol	Dimensions, mm (inches)
Tape Width	W	12 ± 0.3 (0.47)
Sprocket Hole Pitch	P0	4 ± 0.1 (0.15)
Compartment Location	F P2	5.5 ± 0.1 (0.217) 2 ± 0.1 (0.079)
Compartment Pitch	P1	8 ± 0.1 (0.315)

SMA4217 Packaging Specifications

Tape & Reel Specifications (T&R)

Note: All dimensions in millimeters [mm]



SMA4217 Package Marking

SMA4217 Package Weights

Device	Single Unit	Full Tube (100pcs)	Full Pouch (10 tubes)	Full Reel (2000pcs)
SMA4217	0.10	23	240	-
SMA4217-TR	0.10	-	-	500

Note: All weights above are in GRAMS, and include packaging materials where applicable

DISCLAIMER

Solid State Optronics (SSO) makes no warranties or representations with regards to the completeness and accuracy of this document. SSO reserves the right to make changes to product description, specifications at any time without further notices. SSO shall not assume any liability arising out of the application or use of any product or circuit described herein. Neither circuit patent licenses nor indemnity are expressed or implied. Except as specified in SSO's Standard Terms & Conditions, SSO disclaims liability for consequential or other damage, and we make no other warranty, expressed or implied, including merchantability and fitness for particular use.

LIFE SUPPORT POLICY

SSO does not authorize use of its devices in life support applications wherein failure or malfunction of a device may lead to personal injury or death. Users of SSO devices in life support applications assume all risks of such use and agree to indemnify SSO against any and all damages resulting from such use. Life support devices are defined as devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when used properly in accordance with instructions for use can be reasonably expected to result in significant injury to the user, or (d) a critical component of a life support device or system whose failure can be reasonably expected to cause failure of the life support device or system, or to affect its safety or effectiveness.