

3 Watt Zener Diode

Features

- Silicon planar power zener diodes
- Ideal for high density
- Low profile mounting
- Withstand large surge stresses
- High temperature Soldering guaranteed: 250°C / 10 seconds at terminals
- RoHS and REACH compliance


**RoHS
COMPLIANT**

DO-214AA (SMB)

Mechanical Data

Case:	JEDEC DO-214AA (SMB), transfer molded plastic
Epoxy:	Meets UL 94V-0 flammability rating
Terminals:	Solder plated, solderable per MIL-STD 750, Method 2026
Polarity:	Cathode band
Mounting position:	Any
Weight:	0.003 ounce, 0.093 gram

Maximum Ratings and Electrical Characteristics ($T_{Ambient}=25^{\circ}\text{C}$)

Steady State Power Dissipation	$P_{(AV)}$	3.0W	(Note:1)
Operation And Storage Temperature	T_J, T_{STG}	-55°C to +150°C	
Thermal Resistance	R	25°C/W	


Note:

Mounted on 4.0mm² copper pads to each terminal.

Electrical Characteristics

MCC PART NUMBER	ZENER VOLTAGE V_z	TEST CURRENT I_{zt}	MAXIMUM DYNAMIC IMPEDANCE $Z_{zt}@I_{zt}$	KNEE CURRENT I_{zk}	KNEE IMPEDANCE Z_{zk}	MAXIMUM REVERSE CURRENT I_R	REVERSE VOLTAGE V_R	MAXIMUM DC CURRENT I_{zm}
	VOLTS	mA	OHMS	mA	OHMS	uA	VOLTS	mA
SMBJ5913	3.3	113.6	10	1.0	500	100	1.0	454
SMBJ5914	3.6	104.2	9.0	1.0	500	75	1.0	416
SMBJ5915	3.9	96.1	7.5	1.0	500	25	1.0	384
SMBJ5916	4.3	87.2	6.0	1.0	500	5.0	1.0	348
SMBJ5917	4.7	79.8	5.0	1.0	500	5.0	1.5	319
SMBJ5918	5.1	73.5	4.0	1.0	350	5.0	2.0	294
SMBJ5919	5.6	66.9	2.0	1.0	250	5.0	3.0	267
SMBJ5920	6.2	60.5	2.0	1.0	200	5.0	4.0	241
SMBJ5921	6.8	55.1	2.5	1.0	200	5.0	5.2	220
SMBJ5922	7.5	50	3.0	0.5	400	5.0	6.0	200
SMBJ5923	8.2	45.7	3.5	0.5	400	5.0	6.5	182
SMBJ5924	9.1	41.2	4.0	0.5	500	5.0	7.0	164
SMBJ5925	10	37.5	4.5	0.25	500	5.0	8.0	150
SMBJ5926	11	34.1	5.5	0.25	550	1.0	8.4	125
SMBJ5927	12	31.2	6.5	0.25	550	1.0	9.1	125
SMBJ5928	13	28.8	7.0	0.25	550	1.0	9.9	115
SMBJ5929	15	25	9.0	0.25	600	1.0	11.4	100
SMBJ5930	16	23.4	10	0.25	600	1.0	12.2	93
SMBJ5931	18	20.8	12	0.25	650	1.0	13.7	83
SMBJ5932	20	18.7	14	0.25	650	1.0	15.2	75
SMBJ5933	22	17	17.5	0.25	650	1.0	16.7	68
SMBJ5934	24	15.6	19	0.25	700	1.0	18.2	62
SMBJ5935	27	13.9	23	0.25	700	1.0	20.6	55
SMBJ5936	30	12.5	28	0.25	750	1.0	22.8	50
SMBJ5937	33	11.4	33	0.25	800	1.0	25.1	45
SMBJ5938	36	10.4	38	0.25	850	1.0	27.4	41
SMBJ5939	39	9.6	45	0.25	900	1.0	29.7	38
SMBJ5940	43	8.7	53	0.25	950	1.0	32.7	34
SMBJ5941	47	8.0	67	0.25	1000	1.0	35.8	31
SMBJ5942	51	7.3	70	0.25	1100	1.0	38.8	29
SMBJ5943	56	6.7	86	0.25	1300	1.0	42.6	26
SMBJ5944	62	6.0	100	0.25	1500	1.0	47.1	24
SMBJ5945	68	5.5	120	0.25	1700	1.0	51.2	22
SMBJ5946	75	5.0	140	0.25	2000	1.0	56	20
SMBJ5947	82	4.6	160	0.25	2500	1.0	62.2	18
SMBJ5948	91	4.1	200	0.25	3000	1.0	69.2	16
SMBJ5949	100	3.7	250	0.25	3100	1.0	76	15
SMBJ5950	110	3.4	300	0.25	4000	1.0	83.6	13
SMBJ5951	120	3.1	380	0.25	4500	1.0	91.2	12
SMBJ5952	130	2.9	450	0.25	5000	1.0	98.8	11
SMBJ5953	150	2.5	600	0.25	6000	1.0	114	10
SMBJ5954	160	2.3	700	0.25	6500	1.0	121.6	9.0
SMBJ5955	180	2.1	900	0.25	7000	1.0	136.8	8.0
SMBJ5956	200	1.9	1200	0.25	8000	1.0	152	7.0

Dimensions in inch (mm)

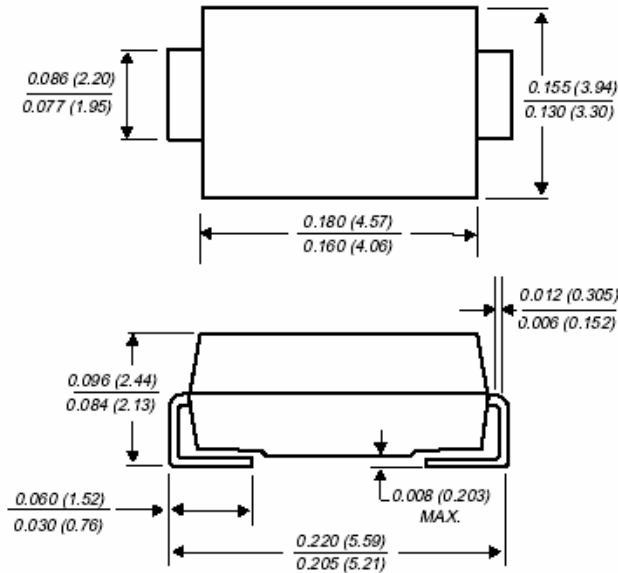

Dimensions in inches and (millimeters)

DO-214AA(SMB)

Contact us:

US HEADQUARTERS

MEI SEMI INC.

2902 Corvin Drive, Santa Clara, CA95051, USA

Tel: 1-408-733-0808 Fax: 1-408-733-2828