

■ DESCRIPTION

The SMC3400 is the N-Channel logic enhancement mode power field effect transistor is produced using high cell density advanced trench technology to provide excellent $R_{DS(ON)}$.low gate charge and operation gate as 2.5V.

This device is suitable for use as a load switch or other general applications.

SMC3400S-TRG ROHS Compliant This is Halogen Free

30V N-Channel Enhancement Mode MOSFET

■ FEATURE



- ◆ $30V/5A, R_{DS(ON)} = 25m\Omega(\text{typ.}) @ V_{GS} = 10V$
- ◆ $30V/4A, R_{DS(ON)} = 28m\Omega(\text{typ.}) @ V_{GS} = 4.5V$
- ◆ $30V/3A, R_{DS(ON)} = 37m\Omega(\text{typ.}) @ V_{GS} = 2.5V$
- ◆ Super high density cell design for extremely low $R_{DS(ON)}$
- ◆ Exceptional on-resistance and Maximum DC current capability

■ APPLICATIONS

- ◆ Power Management in Note book
- ◆ Portable Equipment
- ◆ DSC
- ◆ LCD Display inverter
- ◆ Battery Powered System
- ◆ DC/DC Converter



■ PIN CONFIGURATION



■ PART NUMBER INFORMATION

SMC 3400 S - TR G
 a b c d e

a : Company name.
 b : Product Serial number.
 c : Package code
 d : Handling code
 e : Green produce code

■ ORDERING INFORMATION

Part Number	Package Code	Handling Code	Shipping
SMC3400S-TRG	S : SOT-23L	TR : Tape&Reel	3K/Reel

※ Year Code : 0 ~ 9, 2010 : 0

※ Week Code : A(1~2) ~ Z(53~54)

※ SOT-23L : Only available in tape and reel packaging.

■ ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ Unless otherwise noted)

Symbol	Parameter		Typical	Unit
V_{DSS}	Drain-Source Voltage		30	V
V_{GSS}	Gate-Source Voltage		± 12	V
I_D	Continuous Drain Current ($T_c=25^\circ C$) ^A	$V_{GS}=10V$	5	A
	Continuous Drain Current ($T_c=70^\circ C$) ^A		4	A
I_{DM}	Pulsed Drain Current ^B		20	A
P_D	Power Dissipation	$T_A=25^\circ C$ $T_A=70^\circ C$	1.4 0.9	W
T_J	Operation Junction Temperature		-55 to 150	$^\circ C$
T_{STG}	Storage Temperature Range		-55 to 150	$^\circ C$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

Symbol	Parameter	Typ	Max	Unit
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient ^A Steady-State	-	120	$^\circ C/W$
$R_{\theta JL}$	Thermal Resistance Junction to Lead ^A Steady-State	-	80	$^\circ C/W$

ELECTRICAL CHARACTERISTICS($T_J = 25^\circ C$ Unless otherwise noted)

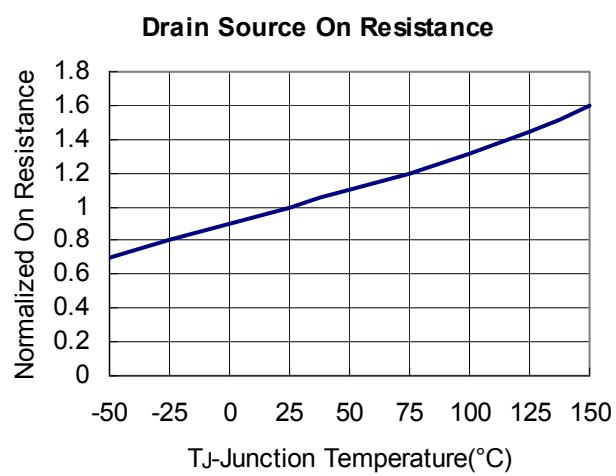
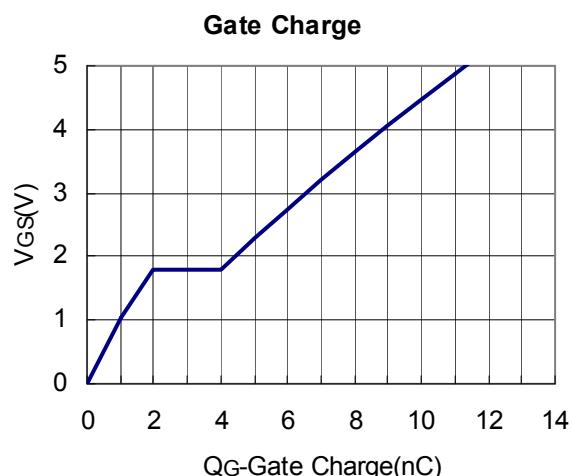
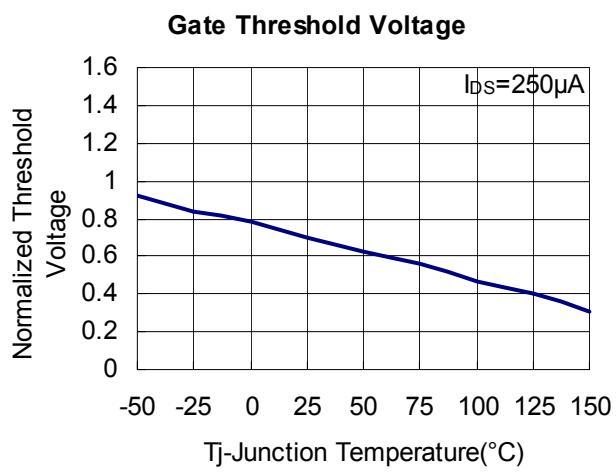
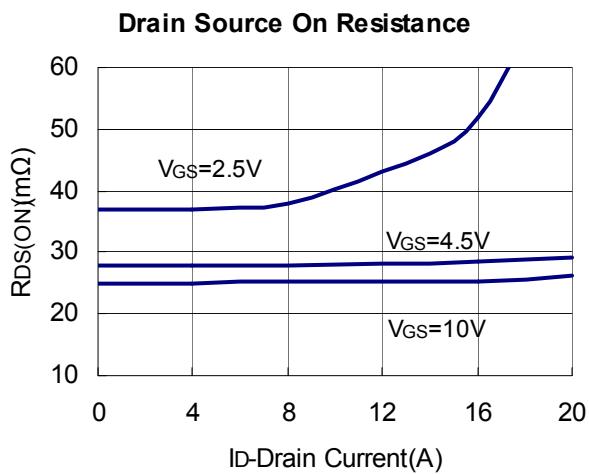
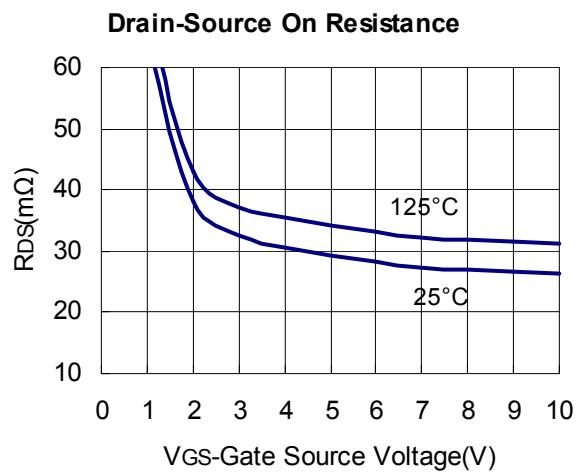
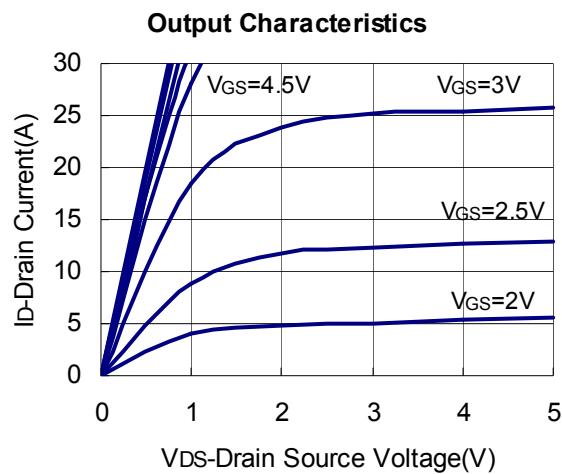
Symbol	Parameter	Condition	Min	Typ	Max	Unit	
Static Parameters							
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	30			V	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	0.6		1.2	V	
I_{GSS}	Gate Leakage Current	$V_{DS}=0V, V_{GS}=\pm 12V$			± 100	nA	
I_{DSS}	Zero Gate Voltage, Drain-Source Leakage Current	$V_{DS}=24V, V_{GS}=0V$ $T_J=25^\circ C$			1	μA	
		$V_{DS}=24V, V_{GS}=0V$ $T_J=55^\circ C$			5		
$R_{DS(ON)}$	Drain-source On-Resistance ^B	$V_{GS}=10V, I_D=5A$		25	29	$m\Omega$	
		$V_{GS}=4.5V, I_D=4A$		28	32		
		$V_{GS}=2.5V, I_D=3A$		37	44		
G_f	Forward Transconductance	$V_{DS}=15V, I_D=5.0A$		12		S	
R_g	Gate Resistance	$V_{GS}=0V, V_{DS}=0V, f=1MHz$		1.5	3	Ω	
Source-Drain Diode							
V_{SD}	Diode Forward Voltage	$I_S=1.0A, V_{GS}=0V$		0.7	1.0	V	
I_S	Continuous Source Current ^{AD}				5	A	
Dynamic Parameters							
$Q_g (4.5V)$	Total Gate Charge	$V_{DS}=20V$ $V_{GS}=4.5V$ $I_D=5A$		7.5	10.2	nC	
Q_{gs}	Gate-Source Charge			1.2	1.78		
Q_{gd}	Gate-Drain Charge			1.82	2.5		
C_{iss}	Input Capacitance	$V_{DS}=15V$ $V_{GS}=0V$ $f=1MHz$		710		pF	
C_{oss}	Output Capacitance			68			
C_{rss}	Reverse Transfer Capacitance			55			
$t_{d(on)}$	Turn-On Time	$V_{DD}=15V$ $I_D=4A$		3.9	6.3	nS	
t_r				42.1	78		
$t_{d(off)}$	Turn-Off Time			22.1	43.5		
t_f				6.6	12.7		

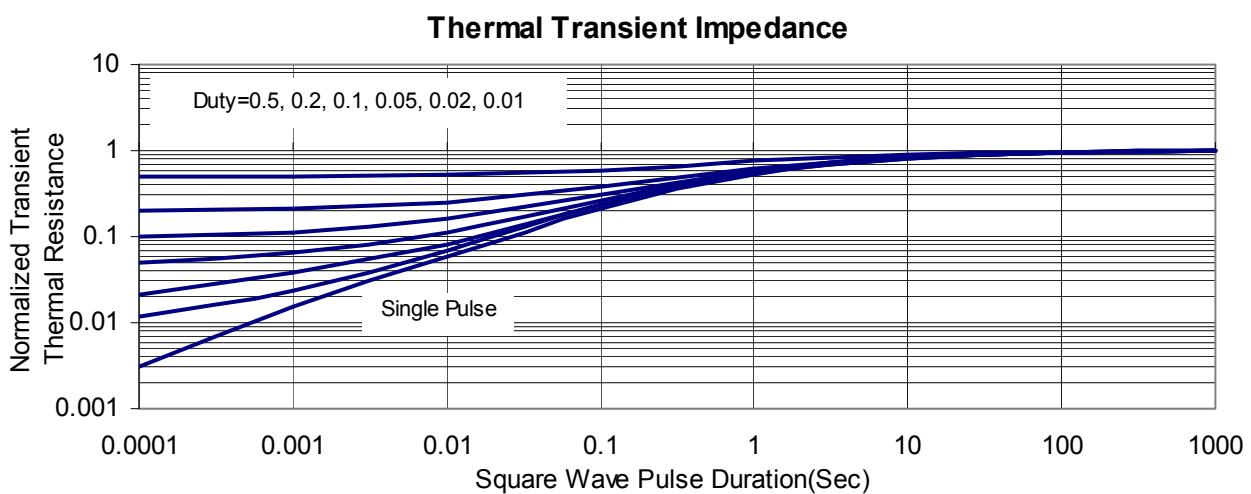
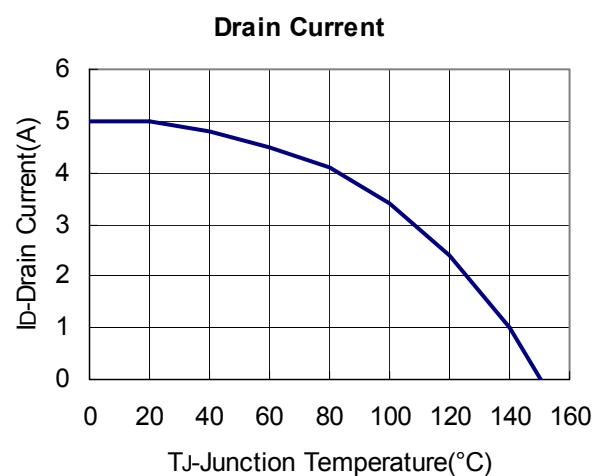
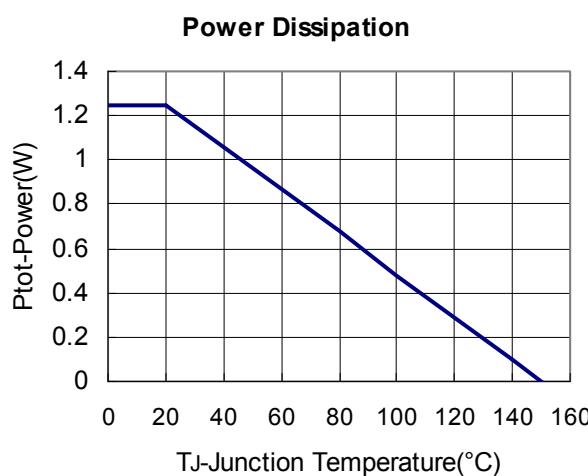
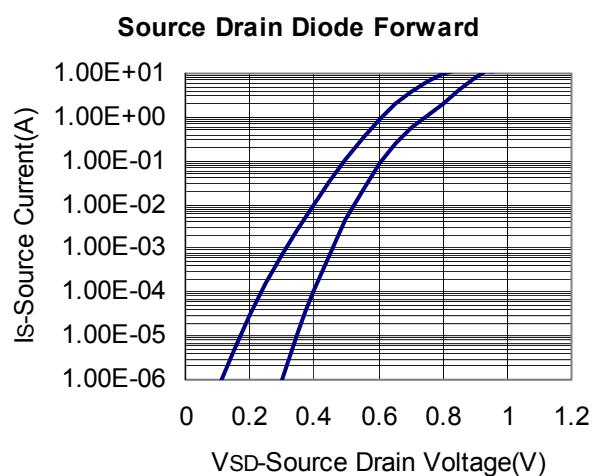
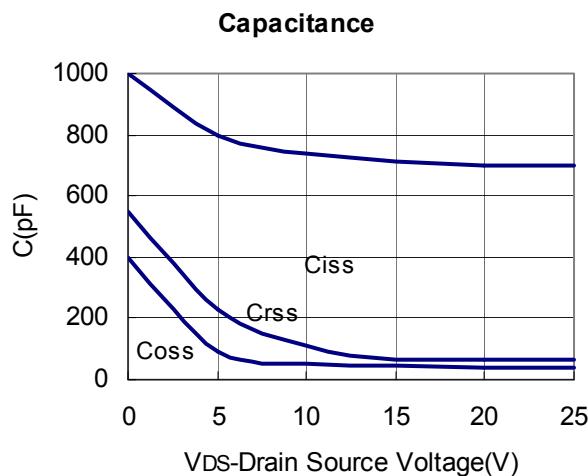
Note:

- A. The value of $R_{\theta JA}$ is measured with the device mounted on 1in 2 FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ C$.
- B. The data tested by pulsed , pulse width $\leq 300\mu S$, duty cycle $\leq 2\%$
- C. The EAS data shows Max. rating . The test condition is $V_{DD}=25V, V_{GS}=10V, L=0.1mH$.
- D. The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date

We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.

TYPICAL CHARACTERISTICS (25°C Unless Note)


TYPICAL CHARACTERISTICS (25°C Unless Note)


SOT-23L PACKAGE DIMENSIONS

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

SOT-23L PACKAGE OUTLINE DIMENSIONS
