

THYRISTOR(Surface Mount Device/Non-isolated)

SMG2D60D

(Sensitive Gate)


SanRex Thyristor **SMG2D60D** is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Electric Blankets, Starter for FL, other control applications
- Industrial Use : SMPS, Solenoid for Breakers, Motor Controls, Heater Controls, other control applications

Features

- $I_T(AV)=2A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

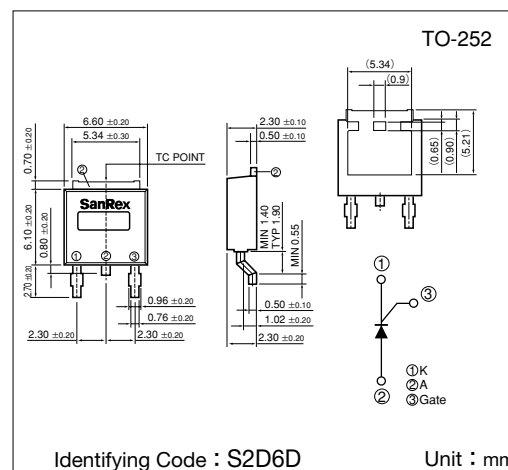

Maximum Ratings

($T_J=25^{\circ}C$ unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V_{RRM}	Repetitive Peak Reverse Voltage		600	V
V_{RSM}	Non-Repetitive Peak Reverse Voltage		720	V
V_{DRM}	Repetitive Peak Off-State Voltage		600	V
$I_{T(AV)}$	Average On-State Current	Single phase, half wave, 180° , conduction, $T_c=108^{\circ}C$	2	A
$I_{T(RMS)}$	R.M.S. On-State Current	Single phase, half wave, 180° , conduction, $T_c=108^{\circ}C$	3.1	A
I_{TSM}	Surge On-State Current	50Hz/60Hz, $1/2$ cycle Peak value, non-repetitive	30/33	A
I^2t	I^2t		4.5	A^2S
PGM	Peak Gate Power Dissipation		0.5	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.1	W
I_{FGM}	Peak Gate Current		0.3	A
V_{FGM}	Peak Gate Voltage (Forward)		6	V
V_{RGM}	Peak Gate Voltage (Reverse)		6	V
T_J	Operating Junction Temperature		$-40 \sim +125$	$^{\circ}C$
T_{stg}	Storage Temperature		$-40 \sim +150$	$^{\circ}C$
	Mass		0.32	g

Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-State Current	$T_J=125^{\circ}C, V_D=V_{DRM}, R_{GK}=220\Omega$			1	mA
I_{RRM}	Repetitive Peak Reverse Current	$T_J=125^{\circ}C, V_R=V_{RRM}, R_{GK}=220\Omega$			1	mA
V_{TM}	Peak On-State Voltage	$I_T=6A$, Inst. measurement			1.5	V
I_{GT}	Gate Trigger Current	$V_D=6V, R_L=10\Omega$	1		200	μA
V_{GT}	Gate Trigger Voltage				0.8	V
V_{GD}	Non-Trigger Gate Voltage	$T_J=125^{\circ}C, V_D=1/2 V_{DRM}, R_{GK}=220k\Omega$	0.1			V
I_H	Holding Current	$R_{GK}=220\Omega$		3.5		mA
$R_{th(j-c)}$	Thermal Resistance	Junction to case			5.8	$^{\circ}C/W$

