



Schottky Barrier Rectifiers

SR16C20CF-G Thru SR16C100CF-G

Reverse Voltage: 20 ~ 100 Volts


Current: 16.0 Amp

Features:

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data:

- Case: ITO-220AB molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Terminals: Solderable per MIL-STD-202, method 208
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Approx. Weight: 1.81 grams

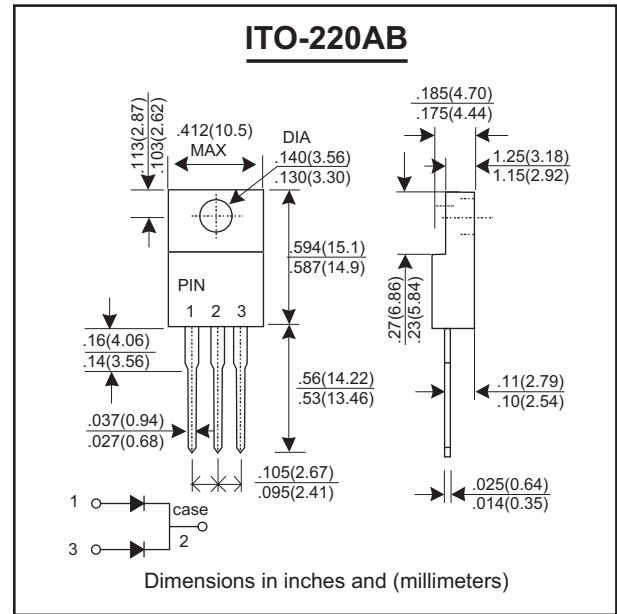

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbol	SR16C20CF -G	SR16C40CF -G	SR16C60CF -G	SR16C80CF -G	SR16C100CF -G	Unit
Max. Recurrent Peak Reverse Voltage	V _{RRM}	20	40	60	80	100	V
Max. RMS Voltage	V _{RMS}	14	28	42	56	70	V
Max. DC Blocking Voltage	V _{DC}	20	40	60	80	100	V
Peak Surge Forward Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I _{FSM}	150					A
Max. Average Forward Rectified Current T _C =100°C	I _(AV)	16.0					A
Max. Instantaneous Forward Voltage at 8A	V _F	0.55		0.65	0.75	0.85	V
Max. DC Reverse Current @T _j = 25°C	I _R	1.0					mA
At Rated DC Blocking Voltage @T _j = 100°C		50					
Typical junction Capacitance (Note1)	C _J	600					pF
Max. Operating Junction Temperature	T _j	-55 to +125					°C
Storage Temperature	T _{STG}	-55 to +150					°C

Note1: (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.



RATINGS AND CHARACTERISTIC CURVES SR16C20CF-G THRU SR16C100CF-G

FIG.1 - FORWARD CURRENT DERATING CURVE

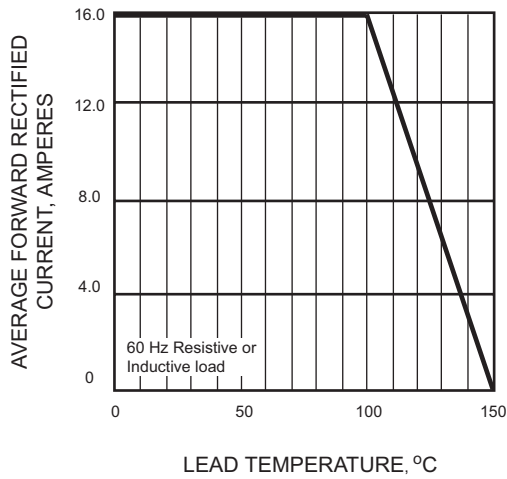


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

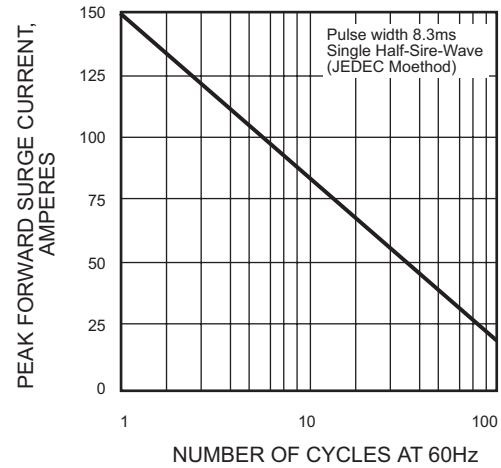


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

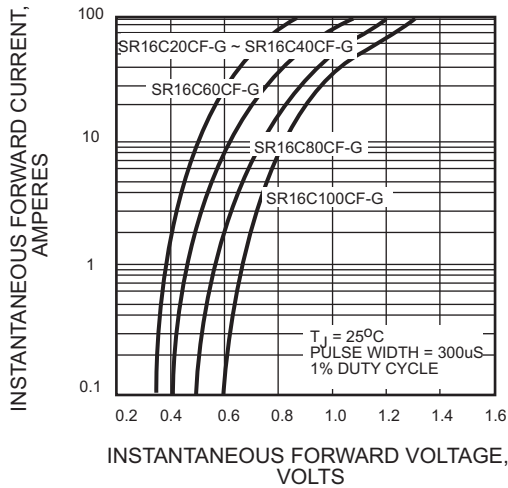


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

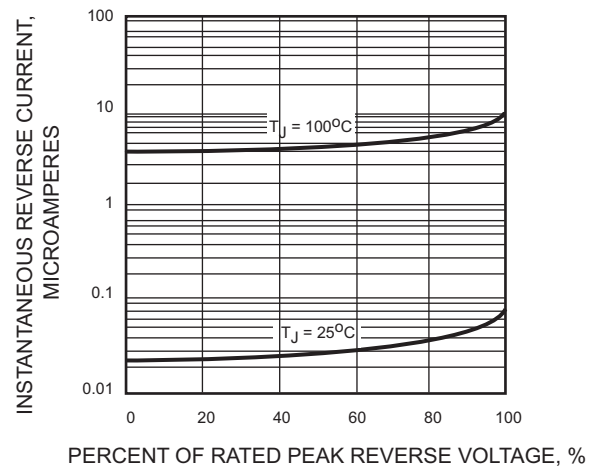


FIG.5 - TYPICAL JUNCTION CAPACITANCE

