



SamHop Microelectronics Corp.


**STM8300**

Ver 1.0

## Dual Enhancement Mode Field Effect Transistor ( N and P Channel )

PRODUCT SUMMARY (N-Channel)		
V <sub>DSS</sub>	I <sub>D</sub>	R <sub>DSON</sub> (mΩ) Max
30V	5.3A	46 @ V <sub>GS</sub> =10V
		65 @ V <sub>GS</sub> =4.5V

PRODUCT SUMMARY (P-Channel)		
V <sub>DSS</sub>	I <sub>D</sub>	R <sub>DSON</sub> (mΩ) Max
-30V	-4.7A	56 @ V <sub>GS</sub> =-10V
		90 @ V <sub>GS</sub> =-4.5V

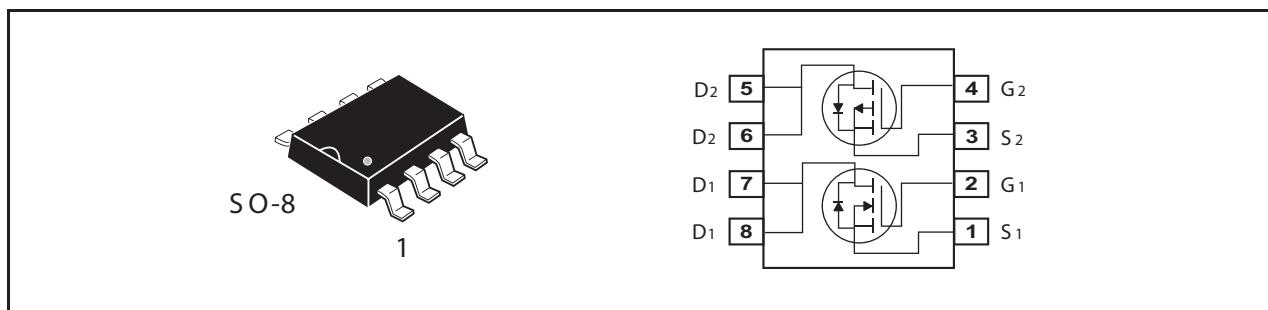

### ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	N-Channel	P-Channel	Units
V <sub>DS</sub>	Drain-Source Voltage	30	-30	V
V <sub>GS</sub>	Gate-Source Voltage	$\pm 20$	$\pm 20$	V
I <sub>D</sub>	Drain Current-Continuous <sup>a</sup>	T <sub>A</sub> =25°C	5.3	A
		T <sub>A</sub> =70°C	4.2	A
I <sub>DM</sub>	-Pulsed <sup>b</sup>	19	-17	A
P <sub>D</sub>	Maximum Power Dissipation <sup>a</sup>	T <sub>A</sub> =25°C	2.0	W
		T <sub>A</sub> =70°C	1.28	W
T <sub>J</sub> , T <sub>STG</sub>	Operating Junction and Storage Temperature Range	-55 to 150		°C

### THERMAL CHARACTERISTICS

R <sub>θJA</sub>	Thermal Resistance, Junction-to-Ambient <sup>a</sup>	62.5	°C/W
------------------	--	------	------

# STM8300

Ver 1.0

## N-Channel ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>OFF CHARACTERISTICS</b>						
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$ , $I_{\text{D}}=250\mu\text{A}$	30			V
$I_{\text{DS}}^{\text{SS}}$	Zero Gate Voltage Drain Current	$V_{\text{DS}}=24\text{V}$ , $V_{\text{GS}}=0\text{V}$			1	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Body Leakage Current	$V_{\text{GS}}= \pm 20\text{V}$ , $V_{\text{DS}}=0\text{V}$			$\pm 100$	nA
<b>ON CHARACTERISTICS</b>						
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}$ , $I_{\text{D}}=250\mu\text{A}$	1	1.6	3	V
$R_{\text{DS}(\text{ON})}$	Drain-Source On-State Resistance	$V_{\text{GS}}=10\text{V}$ , $I_{\text{D}}=5.3\text{A}$		38	46	m ohm
		$V_{\text{GS}}=4.5\text{V}$ , $I_{\text{D}}=4.5\text{A}$		48	65	m ohm
$g_{\text{FS}}$	Forward Transconductance	$V_{\text{DS}}=5\text{V}$ , $I_{\text{D}}=5.3\text{A}$		10		S
<b>DYNAMIC CHARACTERISTICS <sup>c</sup></b>						
$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}}=15\text{V}$ , $V_{\text{GS}}=0\text{V}$ $f=1.0\text{MHz}$		310		pF
$C_{\text{oss}}$	Output Capacitance			73		pF
$C_{\text{rss}}$	Reverse Transfer Capacitance			44		pF
<b>SWITCHING CHARACTERISTICS <sup>c</sup></b>						
$t_{\text{D}(\text{ON})}$	Turn-On Delay Time	$V_{\text{DD}}=15\text{V}$ $I_{\text{D}}=1\text{A}$ $V_{\text{GS}}=10\text{V}$ $R_{\text{GEN}}=6\text{ ohm}$		7.5		ns
$t_{\text{r}}$	Rise Time			9.5		ns
$t_{\text{D}(\text{OFF})}$	Turn-Off Delay Time			16		ns
$t_{\text{f}}$	Fall Time			13		ns
$Q_{\text{g}}$	Total Gate Charge	$V_{\text{DS}}=15\text{V}$ , $I_{\text{D}}=5.3\text{A}$ , $V_{\text{GS}}=10\text{V}$		5.3		nC
		$V_{\text{DS}}=15\text{V}$ , $I_{\text{D}}=5.3\text{A}$ , $V_{\text{GS}}=4.5\text{V}$		2.8		nC
$Q_{\text{gs}}$	Gate-Source Charge	$V_{\text{DS}}=15\text{V}$ , $I_{\text{D}}=5.3\text{A}$ , $V_{\text{GS}}=10\text{V}$		0.9		nC
$Q_{\text{gd}}$	Gate-Drain Charge			1.2		nC
<b>DRAIN-SOURCE DIODE CHARACTERISTICS</b>						
$I_{\text{s}}$	Maximum Continuous Drain-Source Diode Forward Current			1		A
$V_{\text{SD}}$	Diode Forward Voltage <sup>b</sup>	$V_{\text{GS}}=0\text{V}$ , $I_{\text{s}}=1\text{A}$		0.79	1.2	V

Jul,31,2008

# STM8300

Ver 1.0

## P-Channel ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>OFF CHARACTERISTICS</b>						
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V , I <sub>D</sub> =-250uA	-30			V
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> =-24V , V <sub>GS</sub> =0V			-1	uA
I <sub>GSS</sub>	Gate-Body Leakage Current	V <sub>GS</sub> = ±20V , V <sub>DS</sub> =0V			±100	nA
<b>ON CHARACTERISTICS</b>						
V <sub>GS(Th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =-250uA	-1.0	-1.8	-3.0	V
R <sub>DS(ON)</sub>	Drain-Source On-State Resistance	V <sub>GS</sub> =-10V , I <sub>D</sub> =-4.7A		46	56	m ohm
		V <sub>GS</sub> =-4.5V , I <sub>D</sub> =-3.7A		68	90	m ohm
g <sub>FS</sub>	Forward Transconductance	V <sub>DS</sub> =-5V , I <sub>D</sub> =-4.7A		7.5		S
<b>DYNAMIC CHARACTERISTICS <sup>c</sup></b>						
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> =-15V,V <sub>GS</sub> =0V f=1.0MHz		520		pF
C <sub>oss</sub>	Output Capacitance			125		pF
C <sub>rss</sub>	Reverse Transfer Capacitance			78		pF
<b>SWITCHING CHARACTERISTICS <sup>c</sup></b>						
t <sub>D(ON)</sub>	Turn-On Delay Time	V <sub>DD</sub> =-15V I <sub>D</sub> =-1A V <sub>GS</sub> =-10V R <sub>GEN</sub> =6 ohm		7.5		ns
t <sub>r</sub>	Rise Time			12.4		ns
t <sub>D(OFF)</sub>	Turn-Off Delay Time			62		ns
t <sub>f</sub>	Fall Time			37		ns
Q <sub>g</sub>	Total Gate Charge	V <sub>DS</sub> =-15V,I <sub>D</sub> =-4.7A,V <sub>GS</sub> =-10V		10.3		nC
		V <sub>DS</sub> =-15V,I <sub>D</sub> =-4.7A,V <sub>GS</sub> =-4.5V		5.2		nC
Q <sub>gs</sub>	Gate-Source Charge	V <sub>DS</sub> =-15V,I <sub>D</sub> =-4.7A, V <sub>GS</sub> =-10V		1.1		nC
Q <sub>gd</sub>	Gate-Drain Charge			2.8		nC
<b>DRAIN-SOURCE DIODE CHARACTERISTICS</b>						
I <sub>s</sub>	Maximum Continuous Drain-Source Diode Forward Current			-1		A
V <sub>SD</sub>	Diode Forward Voltage <sup>b</sup>	V <sub>GS</sub> =0V,I <sub>s</sub> =-1A		-0.77	-1.2	V
<b>Notes</b>						
a.Surface Mounted on FR4 Board,t ≤ 10sec.						
b.Pulse Test:Pulse Width ≤ 300us, Duty Cycle ≤ 2%.						
c.Guaranteed by design, not subject to production testing.						

Jul,31,2008

# STM8300

Ver 1.0

## N-Channel

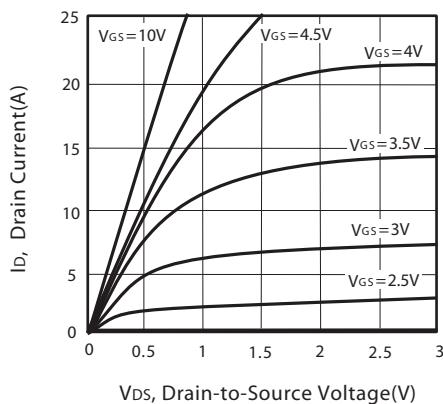


Figure 1. Output Characteristics

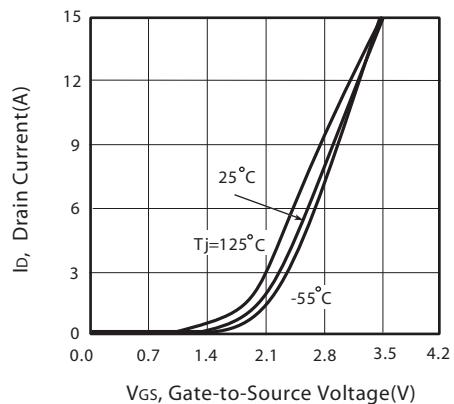


Figure 2. Transfer Characteristics

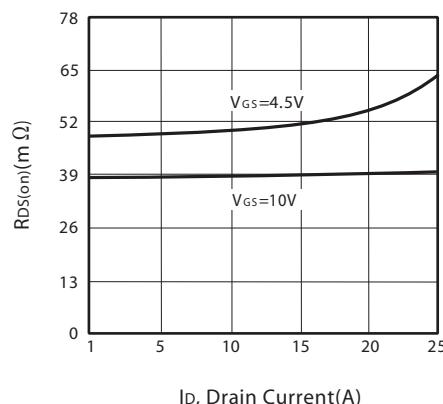


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

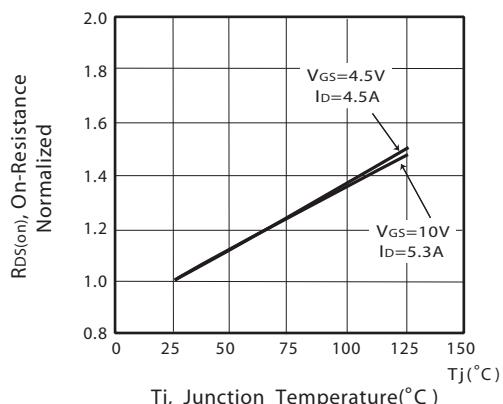


Figure 4. On-Resistance Variation with Drain Current and Temperature

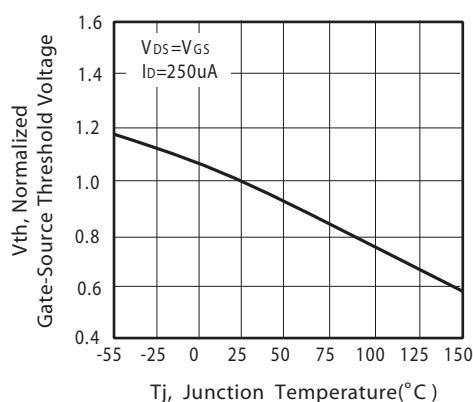


Figure 5. Gate Threshold Variation with Temperature

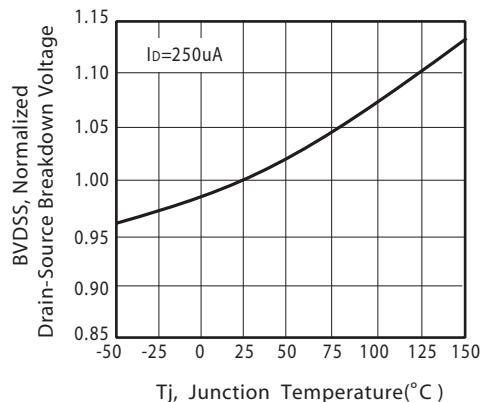


Figure 6. Breakdown Voltage Variation with Temperature

Jul,31,2008

# STM8300

Ver 1.0

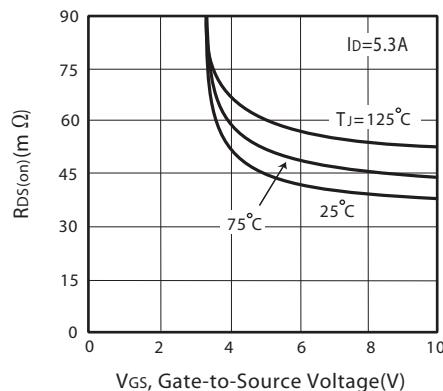


Figure 7. On-Resistance vs.  
Gate-Source Voltage

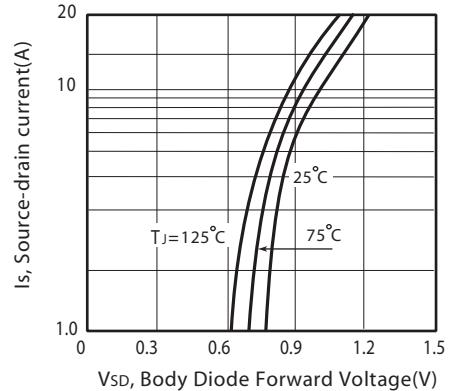


Figure 8. Body Diode Forward Voltage  
Variation with Source Current

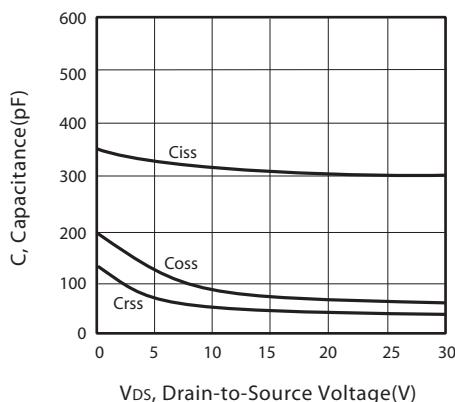


Figure 9. Capacitance

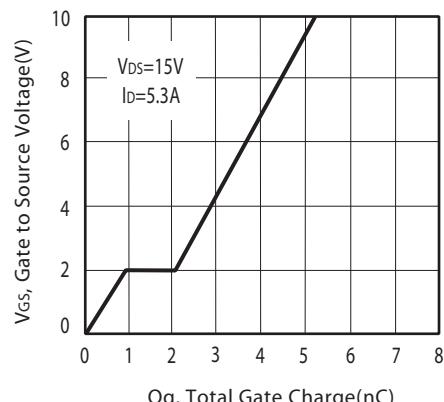


Figure 10. Gate Charge

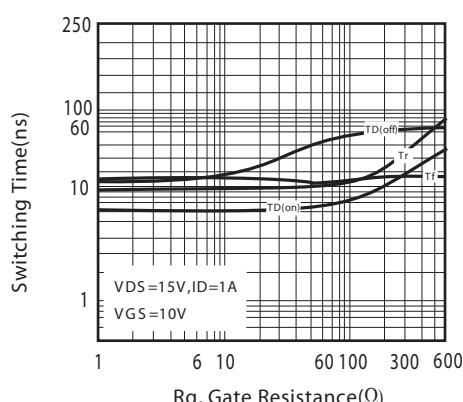


Figure 11. switching characteristics


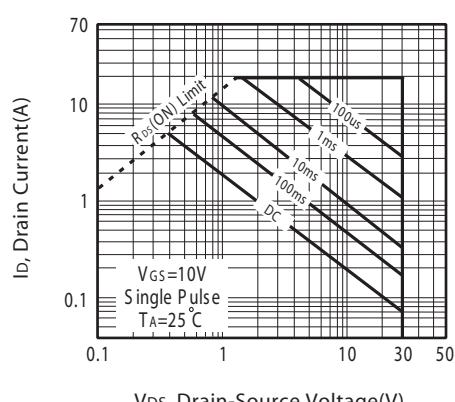


Figure 12. Maximum Safe Operating Area

Jul,31,2008


# STM8300

Ver 1.0

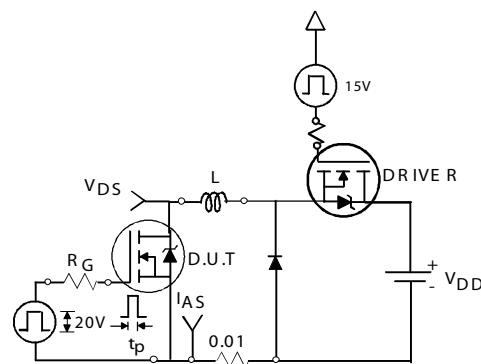


Unclamped Inductive Test Circuit

Figure 13a.

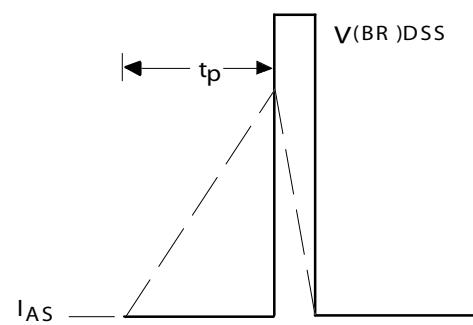

Unclamped Inductive Waveforms

Figure 13b.

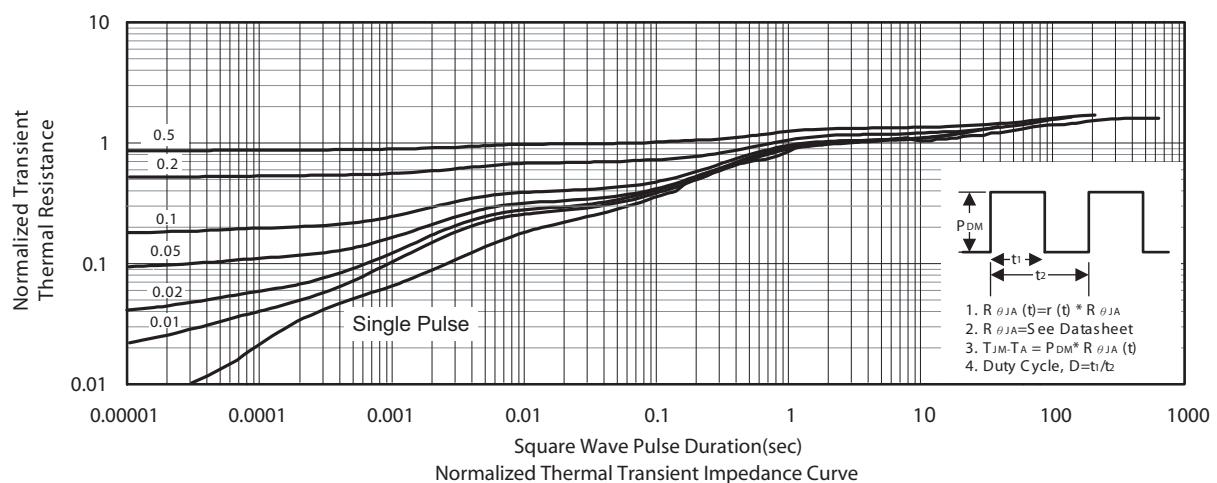

Jul,31,2008

# STM8300

Ver 1.0

## P-Channel

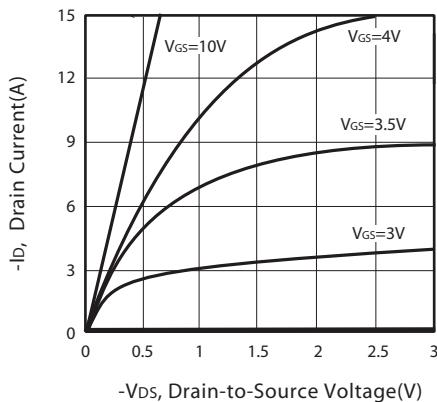


Figure 1. Output Characteristics

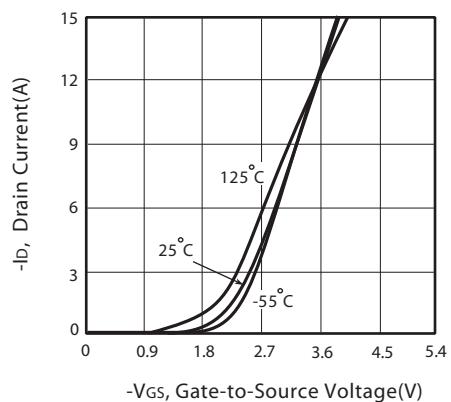


Figure 2. Transfer Characteristics

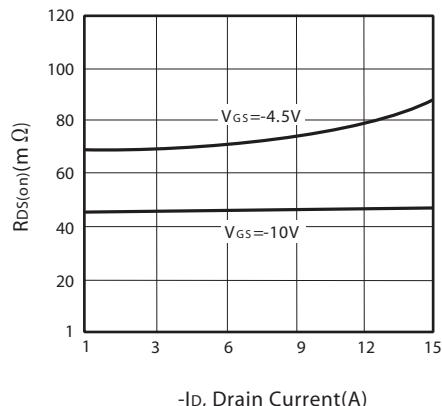


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

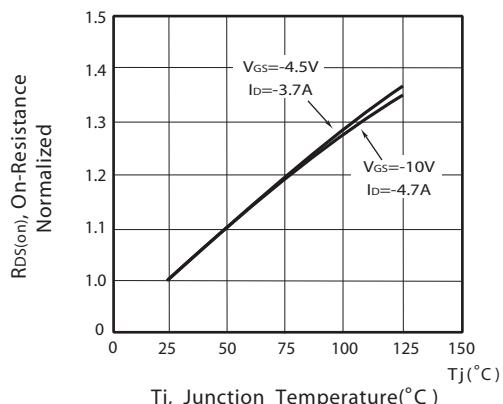


Figure 4. On-Resistance Variation with Drain Current and Temperature

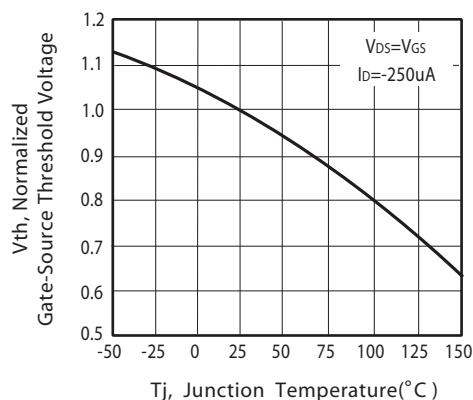


Figure 5. Gate Threshold Variation with Temperature

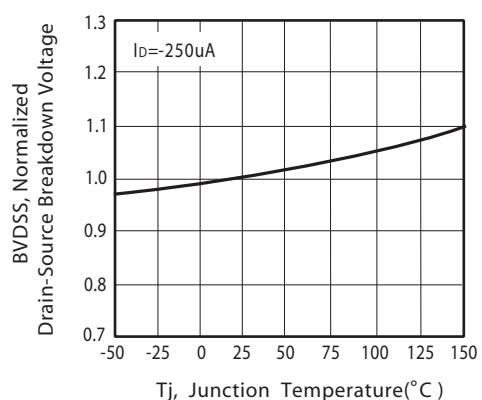


Figure 6. Breakdown Voltage Variation with Temperature

Jul,31,2008

# STM8300

Ver 1.0

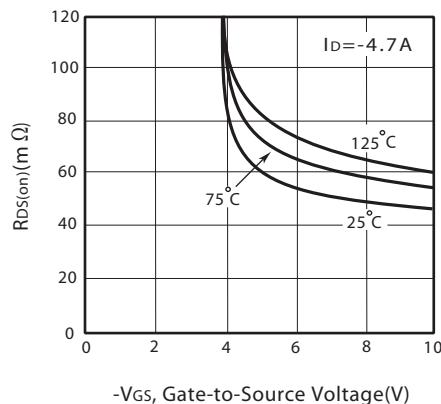


Figure 7. On-Resistance vs.  
Gate-Source Voltage

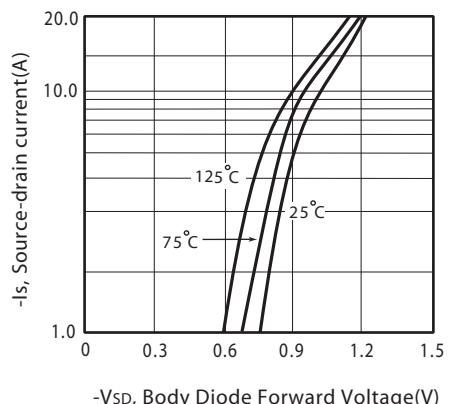


Figure 8. Body Diode Forward Voltage  
Variation with Source Current

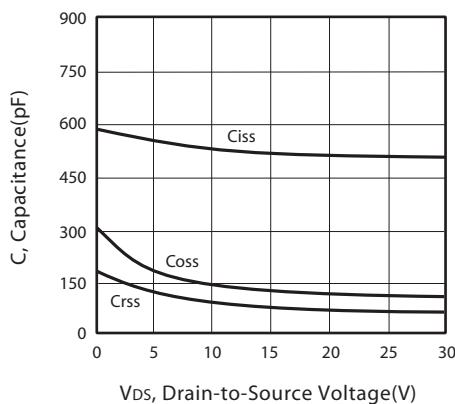


Figure 9. Capacitance

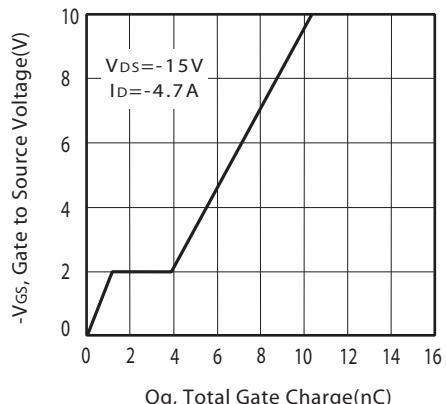


Figure 10. Gate Charge

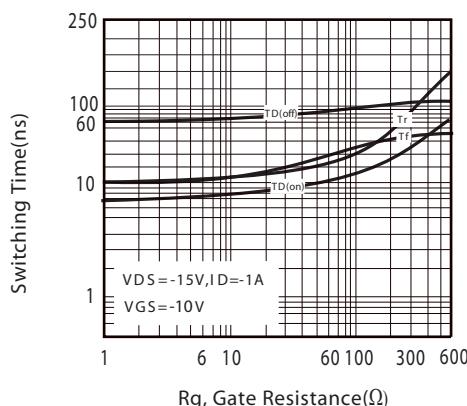


Figure 11. switching characteristics



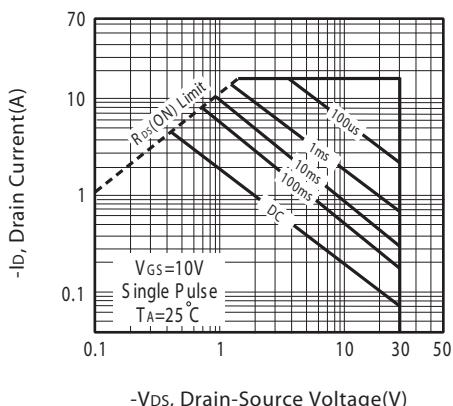


Figure 12. Maximum Safe Operating Area

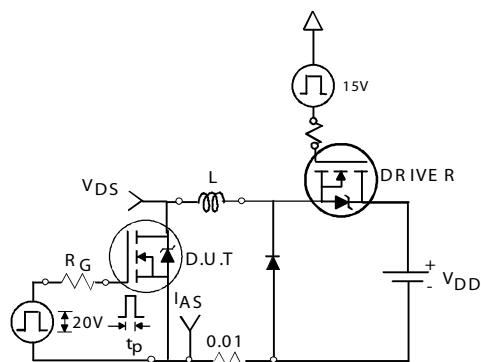


Unclamped Inductive Test Circuit

Figure 13a.

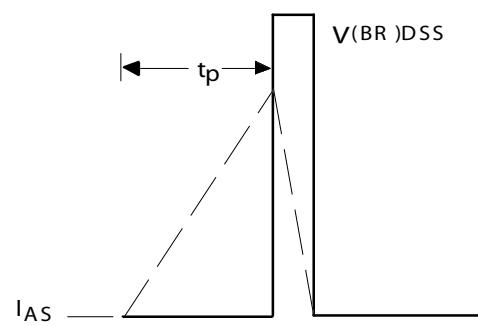

Unclamped Inductive Waveforms


Figure 13b.

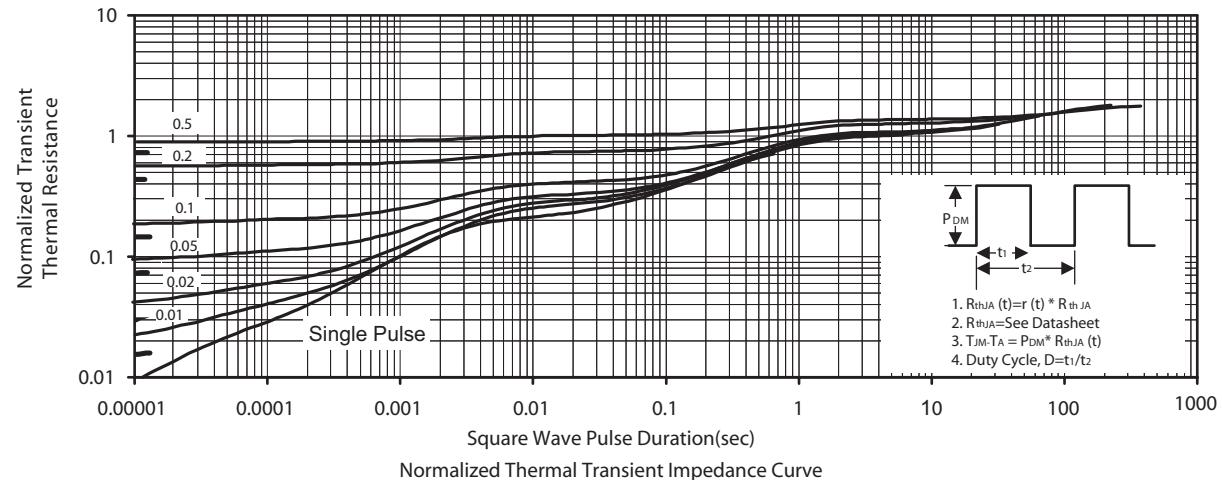

Normalized Thermal Transient Impedance Curve

## PACKAGE OUTLINE DIMENSIONS

SO-8

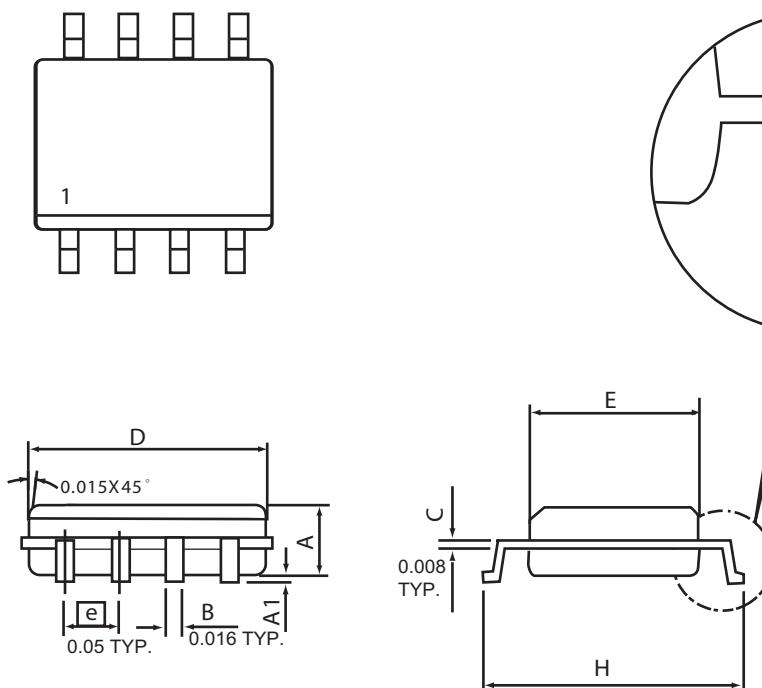


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.35	1.75	0.053	0.069
A1	0.10	0.25	0.004	0.010
D	4.80	4.98	0.189	0.196
E	3.81	3.99	0.150	0.157
H	5.79	6.20	0.228	0.244
L	0.41	1.27	0.016	0.050
θ	0°	8°	0°	8°

**STM8300**

Ver 1.0


# SO-8 Tape and Reel Data

SO-8 Carrier Tape

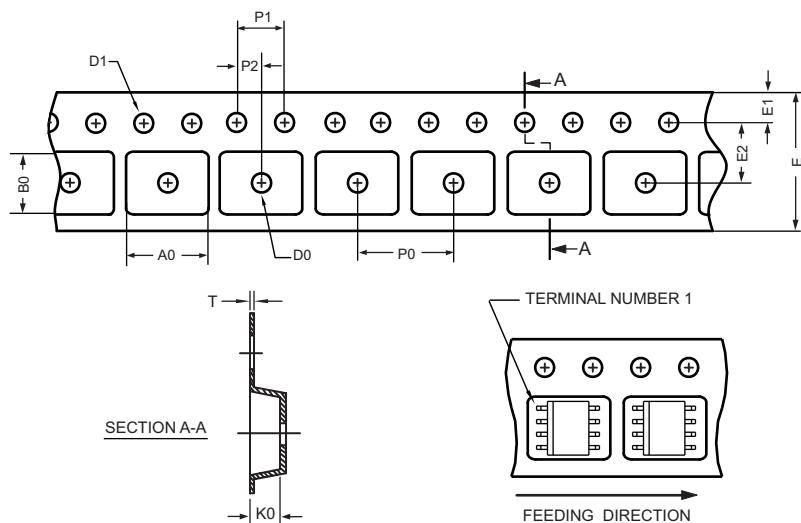

PACKAGE	A0	B0	K0	D0	D1	E	E1	E2	P0	P1	P2	T
SOP 8N	6.50	5.25	2.10	$\psi$ 1.5 (MIN)	$\psi$ 1.55 $\pm$ 0.10	12.0 $\pm$ 0.3	1.75 $\pm$ 0.10	5.5 $\pm$ 0.10	8.0 $\pm$ 0.10	4.0 $\pm$ 0.10	2.0 $\pm$ 0.10	0.30 $\pm$ 0.013
150 mil	$\pm$ 0.15	$\pm$ 0.10	$\pm$ 0.10			-0.1						

SO-8 Reel

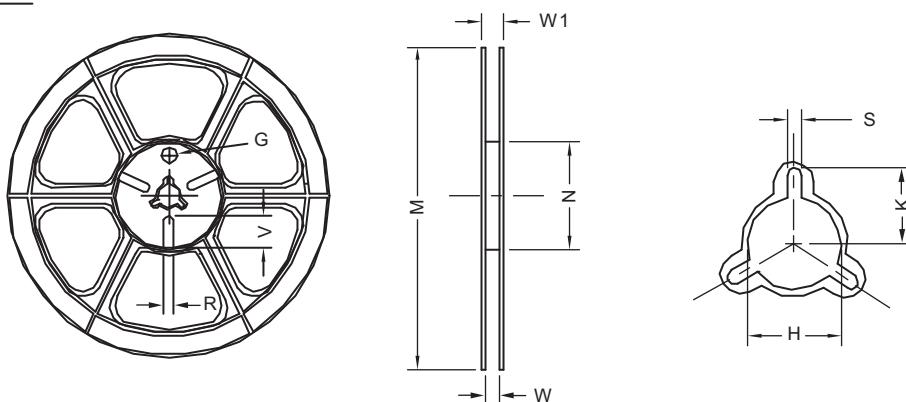

UNIT: mm												
Tape Size	Reel Size	M	N	W	W1	H	K	S	G	R	V	
12 mm	ψ 330	330 ± 1	62 ± 1.5	12.4 + 0.2	16.8 - 0.4	ψ 12.75 + 0.15	---	2.0 ± 0.15	---	---	---	