
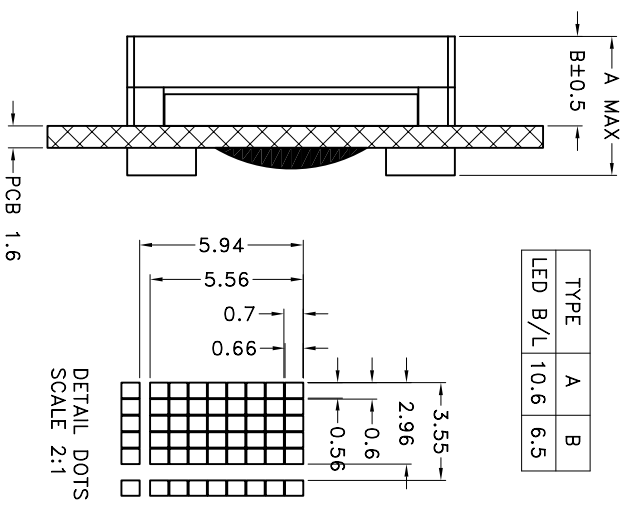


VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2012-05-25
V01	CHANGE BEZEL	2013-09-17

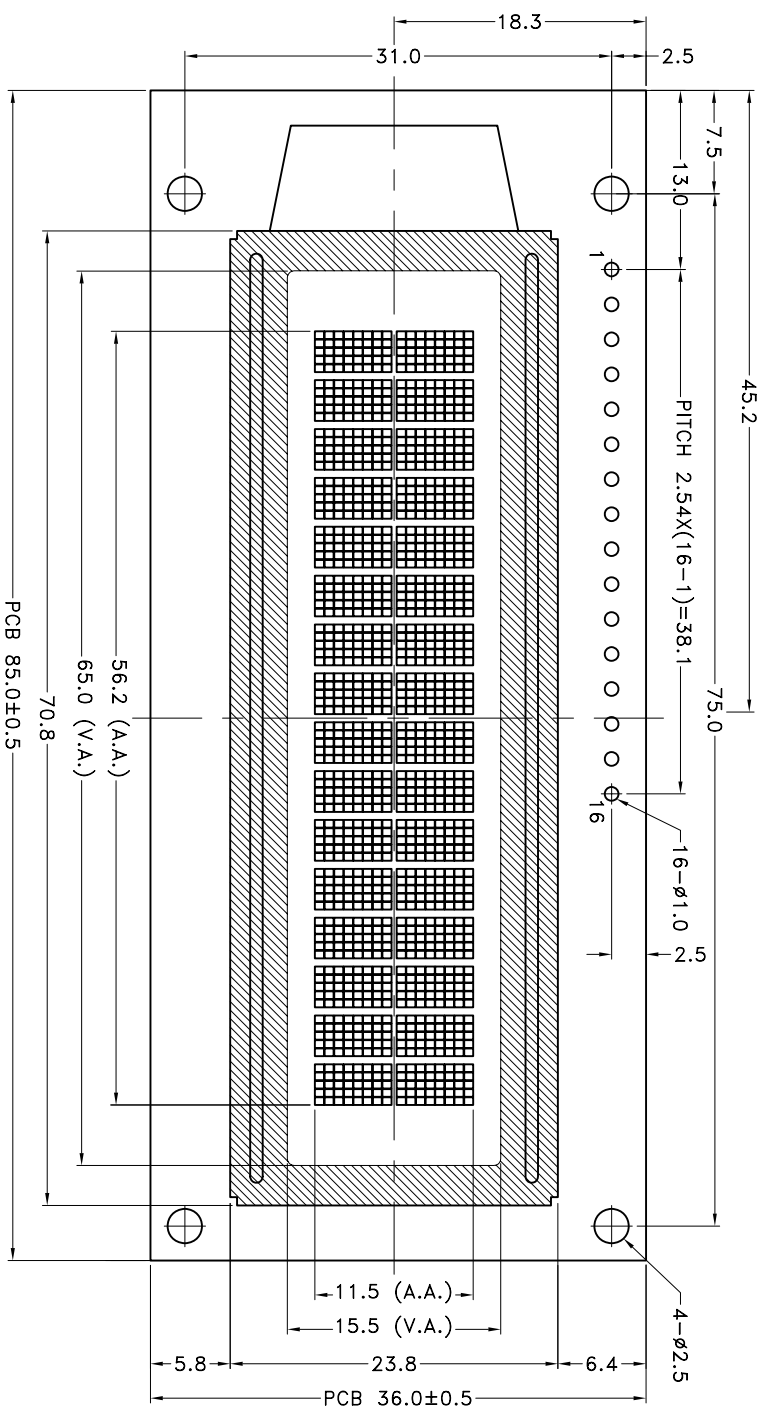

TYPE	A	B
LED B/L	10.6	6.5

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

**SPECIFICATIONS**

1. DISPLAY TYPE: FSTN/TRANSFLECTIVE/POSITIVE/B-W/Anti UV
2. LCD DRIVING VOLTAGE: 4.2V
3. LOGIC VOLTAGE: 5.0V
4. VIEWING DIRECTION: 6 O'CLOCK
5. OPERATING TEMP: -10° C ~ +60° C
6. STORAGE TEMP: -20° C ~ +70° C
7. DRIVE MODE: 1/4DUTY 1A8BIAS
3. BACKLIGHT: WHITE / SIDE BACKLIGHT / 5.0V

**NOTE:**

**DESCRIPTION:**

C/D

SCALE: FIT  
SHEET: 1 OF 1  
PROJECTION  
UNIT: mm  
APP: TC1602T-01  
DATE:

**TINSHARP**  
INDUSTRIAL CO., LTD.  
MODEL  
TC1602T-01  
SERIAL NUMBER  
XWZ0003

CHK:	DWN:	DATE: