

VI TELEFILTER**Filter specification****TFS 70H313****1/5****1. Measurement condition :**

Ambient temperature T_A : 25 °C.
 Input power level: 0 dBm.
 Terminating impedances in f_C *) : for input: 400 Ω | -12,3 pF.
 for output: 50 Ω | 0 pF.

2. Characteristics :

Remark: Reference level for the relative attenuation a_{rel} of the **TFS 70H313** is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The reference frequency f_C is the arithmetic mean value of the upper and lower frequencies at the **20 dB** filter attenuation level relative to the insertion loss a_e . The temperature coefficient of frequency Tc_f is valid both for the reference frequency f_C and the frequency response of the filter in the operating temperature range. The frequency shift of the filter in the operating temperature range is not included in the production tolerance scheme.

Data		typ. value		tolerance / limit		
Insertion loss (Reference level)	a_e	23	dB	max.	26	dB
Centre frequency at ambient temperature (f_{CTA})	f_C	70,0	MHz	70,0 $\pm$ 0,1		MHz
Pass band :	PB			$f_C \dots f_C \pm 9$		MHz
Amplitude ripple in : $f_C \dots f_C \pm 7,9$ MHz		0,4	dB			
Bandwidth at ambient temperature T_A :	BW					
1 dB		17,90	MHz	min.	17,6	MHz
3 dB		18,50	MHz	min.	18,0	MHz
10 dB		20,60	MHz			
20 dB		21,80	MHz			
40 dB		23,20	MHz	max.	23,5	MHz
Relative attenuation :	a_{rel}					
$f_C \dots f_C \pm 8,8$ MHz		-		max.	1	dB
$f_C \pm 8,8$ MHz $\dots f_C \pm 9,0$ MHz		-		max.	3	dB
$f_C \pm 11,75$ MHz $\dots f_C \pm 15$ MHz		52	dB	min.	40	dB
$f_C \pm 15$ MHz $\dots f_C \pm 60$ MHz		55	dB	min.	47	dB
Group delay (mean value in PB):		1,21	μ s			
Group delay ripple in PB (p-p):		35	ns	max.	60	ns
Deviation from linear phase in PB :		4°		max.	6°	
Triple transit attenuation compared to main signal		53	dB			
Crosstalk		60	dB			
Temperature coefficient of frequency (Tc_f) :		- 75	ppm/K			
Frequency deviation of f_C over temperature :		$\Delta f_C(\text{Hz}) = Tc_f(\text{ppm/K}) \times (T - T_o) \times f_{CTA} (\text{MHz})$				
Operating temperature range				- 25 °C $\dots$ + 80 °C		
Storage temperature range				- 40 °C $\dots$ + 85 °C		

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.


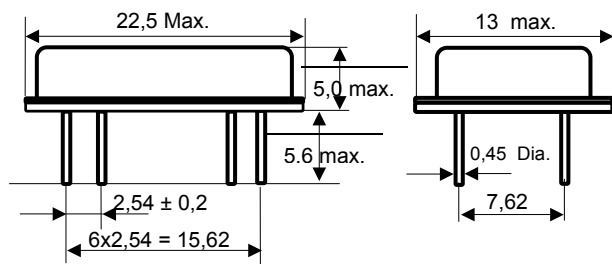
Generated: Dr. Chilla

Checked/Approved: Dr. Bert Wall

VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

Vectron International, Inc.
267 Lowell Road
Hudson, NH 03051 / USA
Tel: (603) 598-0070 Fax: (603) 598-0075
E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

3. Package and pin connection : (All dimensions in mm)


Date-code: Year+week

M 2000

N 2001

P 2002

Date-code



Pin 14

Input

Pin 1

Input RF Return

Pin 8

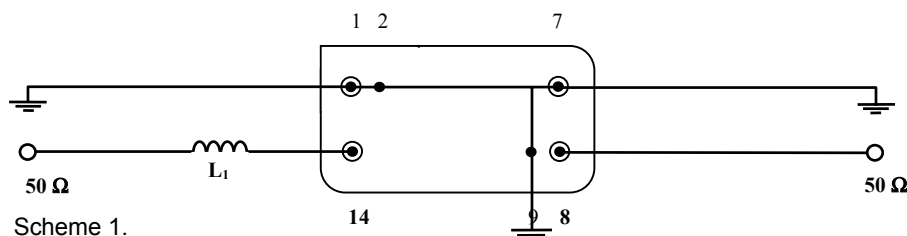
Output

Pin 7

Output RF Return

Pin 2, 9

Package Ground

4. 50 Ω matching network (details refer to application note):

Scheme 1.

For final test we use scheme 1.

5. Stability characteristics :

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

6. Air reflow temperature conditions :

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

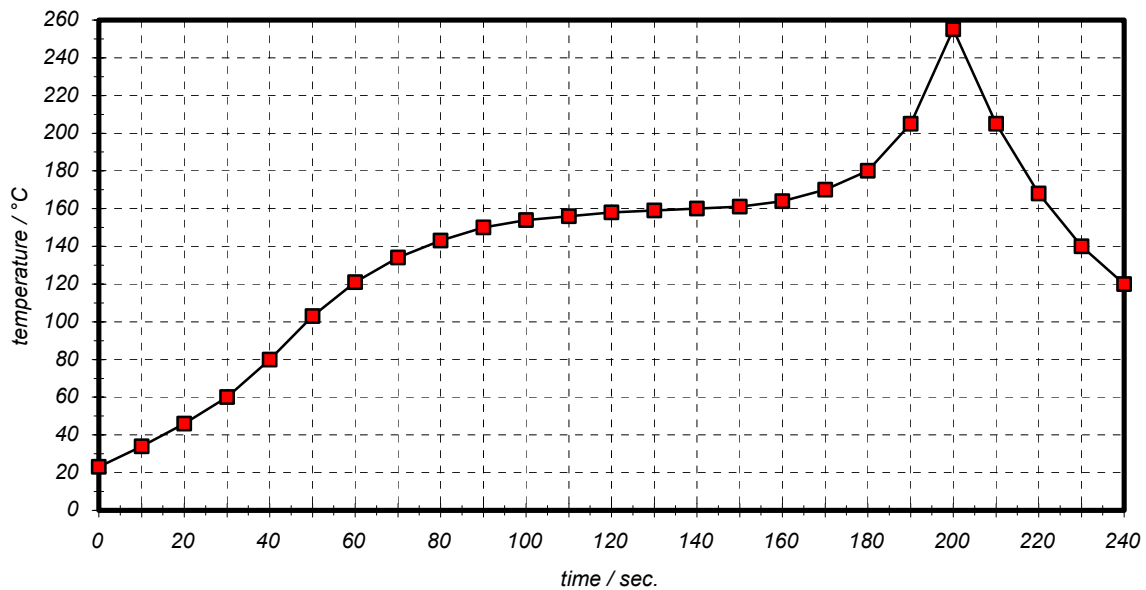
Air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER**Filter specification****TFS 70H313****5/5****History**

Version	Reason of changes	Name	Date
1.0	Generate preliminary specification .	Dr. Chilla	23.04.2002
1.1	Generate filter specification . add typical filter values; add matching networks: scheme 1; add termination impedances for scheme 1. referency frequency measurement changed from 3 dB to 20 dB	Dr. Chilla	16.05.2002

VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

Vectron International, Inc.
267 Lowell Road
Hudson, NH 03051 / USA
Tel: (603) 598-0070 Fax: (603) 598-0075
E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information